Leibniz Universität Hannover

Fakultät für Maschinenbau
Institut für Kontinuumsmechanik

# Hamilton-Principle Models of Oral Biofilm Dysbiosis

## GPU-Accelerated Inference, Metabolic Priors, and Spatial Stratification

**Masterarbeit**

im Studiengang Maschinenbau (Double Degree, LUH/Keio)

| | |
|---|---|
| **Verfasser:** | Keisuke Nishioka |
| **Matrikelnummer:** | 10081049 |
| **Erstprüfer:** | Prof. Dr.-Ing. habil. Philipp Junker (IKM) |
| **Zweitprüfer:** | Dr.-Ing. Matthias Wangenheim (IDS) |
| **Betreuer:** | Dr.-Ing. Meisam Soleimani, Dr.-Ing. Hendrik Geisler |
| **Institut:** | Institut für Kontinuumsmechanik (IKM) |
| **Abgabedatum:** | Oktober 2026 |

Hannover, Oktober 2026

# Abstract

A point model of a multi-species biofilm describes how the composition at one material point evolves in time, but has no space. A continuum growth model describes where a biofilm grows and what stresses it carries, but does not distinguish species. This thesis brings the point model into an existing finite element framework, the biofilm element of the Institut für Kontinuumsmechanik in ANSYS, so that composition, growth and stress can be computed together. Both models follow from the extended Hamilton principle: the growth field of Klempt et al. (2024) and the multi-species point model of Klempt et al. (2026).

First, the 15 interaction coefficients of a five-species point model are estimated with transitional Markov chain Monte Carlo from in-vitro time courses under four conditions. Compiled with JAX, the forward model runs about 150 times faster on the GPU than on the CPU; every stage is repeated with three seeds, and the result states which of the 15 coefficients the data determine. A metabolic sign prior carries the same type of model to sparse in-vivo data.

Second, the growth kinematics $\mathbf{F} = \mathbf{F}_e\mathbf{F}_g$ with $\mathbf{F}_g = \alpha\mathbf{I}$ is implemented as an ANSYS user material, verified against closed-form solutions, and coupled to the element's biofilm field through the growth equation at every Gauss point. Inside ANSYS the coupled run follows the exact solution of a gradient-free region to $3 \times 10^{-11}$ in $\alpha$.

Third, the point model runs, unchanged, at every Gauss point. It receives the nutrient and an antibiotic from fields of the element, interpolated in time, and only its living biomass consumes them; through the nutrient the composition reaches the spreading of the biofilm. With uniform fields the coupled point model reproduces the point model alone to round-off. The antibiotic is shown with synthetic data, since the calibration data contain none: it lowers the living volume fraction of a two-species seed from 0.97 to 0.15, or to 0.04 when the species start mixed, while the growth changes little. The growth converges on refined grids within a few percent; the stress needs a second-order treatment of the front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ and is known to within 8 to 26 %.

The coupling has been verified, but not yet validated against measurements. A coupling in which the composition acts on the stiffness is left to the continuation of this work.

# Acknowledgements

I thank Prof. Dr.-Ing. habil. Philipp Junker (Institut für Kontinuumsmechanik, IKM) for the opportunity to do this thesis at the institute and for the continuum-mechanical framework it builds on, and Dr.-Ing. Matthias Wangenheim (IDS) for acting as second examiner. I thank my supervisors, Dr.-Ing. Meisam Soleimani and Dr.-Ing. Hendrik Geisler, for their guidance throughout the work and for many discussions on the Hamilton biofilm models.

I am grateful to Felix Klempt, whose growth model and finite element implementation this work follows, and who answered my questions about it, and to Oliver Höchel, who provided the version of that implementation used here and showed me how to compile, link and run user routines in ANSYS.

Part of this work was carried out during a research internship at the Lower Saxony Centre for Biomedical Engineering, Implant Research and Development (NIFE) and the Hannover Medical School (MHH). I thank Dr. Szymon P. Szafrański for hosting and guiding the internship and for the metabolic and microbiological insight behind the in-vivo analysis, and Nils Heine, Dr. Katharina Doll-Nikutta, Dr. Rumjhum Mukherjee and Prof. Meike Stiesch for the experimental data and their interpretation.

I also thank Assoc. Prof. Mayu Muramatsu (Keio University) for the support within the double-degree programme and for the discussions on continuing this work at Keio.

I gratefully acknowledge financial support from the JASSO (Japan Student Services Organization) Student Exchange Support Program (Scholarship for Short-Term Study Abroad) and the Yoshiaki Ishii Human Resource Development Scholarship of Keio University, which together supported this double-degree research stay in Hannover.

Finally, I thank my family and friends for their support throughout this work.

# Contents

**Abstract** i

**Acknowledgements** ii

**List of Symbols** viii

**1 Introduction** 1
- 1.1 Clinical Background: Oral Biofilm and Peri-implantitis . . . 1
- 1.2 Models of Biofilm Composition and Growth . . . 1
  - 1.2.1 Composition at a material point . . . 1
  - 1.2.2 Estimating the interactions . . . 2
  - 1.2.3 Growth in space . . . 2
- 1.3 Objectives and Thesis Structure . . . 2

**2 Theoretical Background** 4
- 2.1 Extended Hamilton Principle . . . 4
- 2.2 The Growth Field of Klempt et al. 2024 . . . 4
  - 2.2.1 Variables and kinematics . . . 4
  - 2.2.2 Energy, growth and consumption . . . 5
  - 2.2.3 Evolution equations . . . 5
- 2.3 The Point Model of Klempt et al. 2026 . . . 6
  - 2.3.1 State variables . . . 6
  - 2.3.2 Energy, dissipation and evolution equations . . . 7
  - 2.3.3 Symmetry and scale . . . 7
  - 2.3.4 Check against the paper . . . 8
- 2.4 Relation to the Replicator Equation . . . 8
- 2.5 Combining the Two Models . . . 8
- 2.6 Bayesian Inference and TMCMC . . . 9
  - 2.6.1 Bayesian parameter identification . . . 9
  - 2.6.2 Transitional Markov chain Monte Carlo . . . 9
- 2.7 Metabolic Sign Priors . . . 10

**3 GPU-Accelerated Bayesian Inference for a Five-Species Biofilm** 11
- 3.1 Experimental System . . . 11
- 3.2 Inference Setup . . . 12
  - 3.2.1 The 15-parameter interaction matrix . . . 12
  - 3.2.2 Likelihood . . . 12
  - 3.2.3 Prior and four stages . . . 13

3.2.4 TMCMC on the GPU and acceptance criteria . . . 13
3.3 Results . . . 15
3.3.1 Fit and convergence . . . 15
3.3.2 What the data determine . . . 17
3.3.3 The *Fn–Pg* coefficient . . . 19
3.3.4 Recovery test . . . 22
3.4 Checks Against Data Not Used in the Inference . . . 22
3.5 Discussion . . . 23
3.6 From In-Vitro to In-Vivo Data: a Metabolic Sign Prior . . . 24

**4 Coupling biofilm growth into an existing FEM element 27**
4.1 Scope and contribution . . . 27
4.2 The constitutive model . . . 27
4.3 Implementation . . . 29
4.4 Verification of the growth law . . . 29
4.4.1 Growth kinematics against closed forms . . . 29
4.4.2 The delivered routine on a larger mesh . . . 30
4.4.3 What these checks establish, and what they do not . . . 32
4.5 Coupling to the element's biofilm field . . . 32
4.5.1 The framework and the growth equation . . . 32
4.5.2 Growth counted once per increment . . . 33
4.5.3 Four properties of the framework found along the way . . . 35
4.6 The point model at every Gauss point . . . 36
4.7 Results . . . 39
4.7.1 Two species with nutrient and antibiotic . . . 43
4.7.2 The calibrated five-species model in the element . . . 47
4.8 Limitations . . . 48
4.9 Outlook: towards a fully coupled model . . . 50
4.9.1 First steps, computed in Python . . . 50

**5 Conclusion 55**
5.1 Discussion . . . 56
5.2 Limitations . . . 57
5.3 Outlook . . . 58

**A AGORA2 Representative Strains and Oral-Fluid Medium 68**

**B TMCMC Implementation Details 69**

**C Reproduction of the Test Cases of Klempt et al. 2024 71**
C.1 Set-up . . . 71
C.2 The printed equations . . . 71

C.3 What reproduces the curves . . . . . 71
C.4 Mechanics and units . . . . . 72
C.5 Questions to the authors and their answers . . . . . 72

**D Stability of the Explicit Field Update** **76**

**Selbstständigkeitserklärung** **79**

# List of Figures


1.1 Overview of the coupling . . . . . 3

3.1 Model and four-stage inference . . . . . 14
3.2 Posterior predictive fits . . . . . 16
3.3 Composition and live fraction in CS . . . . . 17
3.4 What the data determine . . . . . 18
3.5 Marginal posteriors . . . . . 20
3.6 MAP of every seed . . . . . 21
3.7 Recovery test on synthetic data . . . . . 22
3.8 Checks against data not used in the inference . . . . . 23
3.9 Leave-one-patient-out prediction per patient . . . . . 26
3.10 Predicted against observed guild fractions . . . . . 26

4.1 Multiplicative growth kinematics . . . . . 28
4.2 The two growth cases, solved in ANSYS . . . . . 30
4.3 The bonded curved shell under increasing growth . . . . . 31
4.4 Newton convergence with the finite-difference tangent . . . . . 31
4.5 Stability of the explicit field update . . . . . 33
4.6 Partner framework solution loop . . . . . 34
4.7 Eq. 36 against Table 1 of Klempt et al. 2024 . . . . . 34
4.8 Coupled run against the exact solution . . . . . 39
4.9 Two ways of computing the growth, whole model . . . . . 40
4.10 A seed element and its neighbours . . . . . 41
4.11 Convergence in time and mesh . . . . . 43
4.12 Separate example with antibiotic in 3D . . . . . 45
4.13 Mixed example with antibiotic in 3D . . . . . 45
4.14 Calibrated five-species model in the element . . . . . 48
4.15 The nutrient as the clock of the point model . . . . . 52
4.16 Local nutrient in the point model . . . . . 52
4.17 Composition acting on the spreading . . . . . 53

C.1 Test case 4.1, reproduction and paper . . . . . 73
C.2 Test case 4.2, reproduction and paper . . . . . 74

D.1 Stability limit of the NEM stencil against the mesh . . . . . 77

# List of Tables

2.1 Parameters of Klempt et al. 2024 . . . . . 6

3.1 Documented species interactions . . . . . 12
3.2 Computational cost . . . . . 14
3.3 Fit metrics per condition . . . . . 15
3.4 Classification of the interaction entries . . . . . 19
3.5 Leave-one-patient-out prediction with a sign prior . . . . . 25

4.1 Mesh refinement in ANSYS . . . . . 42
4.2 Sensitivity to the diffusion coefficient . . . . . 43
4.3 Two species with nutrient and antibiotic . . . . . 44
4.4 Grid convergence of growth and stress . . . . . 46

5.1 Continuum models of biofilm growth compared . . . . . 56

A.1 AGORA2 representative strains . . . . . 68

B.1 Particles and mutation steps per stage . . . . . 70

C.1 Reproduction of Klempt et al. 2024, mean curves . . . . . 72

D.1 Stability limit of the NEM stencil . . . . . 78

# List of Symbols

Units are those of the models; $T^*$ is the normalised time of Klempt et al. 2024, and lengths in Chapter 4 are in mm.

**Growth field and mechanics (Klempt et al. 2024, Chapter 4)**

| | |
|---|---|
| $\mathbf{F}$, $\mathbf{F}_e$, $\mathbf{F}_g$ | deformation gradient, its elastic and growth parts, $\mathbf{F} = \mathbf{F}_e\mathbf{F}_g$ |
| $\alpha$ | isotropic growth, $\mathbf{F}_g = \alpha\mathbf{I}$, $\alpha(0) = 1$; the growth is $\alpha - 1$ |
| $\phi$, $\phi_{3D}$ | biofilm state variable of the field (amount of biofilm), $\phi \in [0, 1]$ |
| $c$ | nutrient concentration of the field |
| $\beta$ | diffusion coefficient of $\phi$ [mm$^2/T^*$] |
| $k_\alpha$ | growth rate [$1/T^*$] |
| $d$, $g$ | nutrient diffusivity [mm$^2/T^*$] and consumption rate [$1/T^*$] |
| $r$, $k$ | front growth parameter and half-velocity constant |
| $E$, $\nu$, $\mu$ | Young's modulus, Poisson's ratio, shear modulus |
| $E(\phi)$, $f$ | stiffness weighted by $\phi^2$, small floor for the void |
| $C_{10}$, $C_{01}$, $D_1$ | Mooney–Rivlin constants |
| $J_e$, $\mathbf{b}_e$, $\bar{I}_1$, $\bar{I}_2$ | $\det \mathbf{F}_e$, left Cauchy–Green tensor of $\mathbf{F}_e$, its isochoric invariants |
| $\Lambda$ | Thiele number, $\Lambda^2 = gL^2/d$ |

**Point model (Klempt et al. 2026, Chapters 2 and 3)**

| | |
|---|---|
| $\phi_i$, $\phi_0$ | volume fraction of species $i$, void fraction |
| $\psi_i$, $\bar{\phi}_i$ | viability of species $i$, living fraction $\bar{\phi}_i = \phi_i\psi_i$ |
| $\mathbf{A}$, $A_{ij}$ | symmetric interaction matrix |
| $\mathbf{B}$, $b_i$ | antibiotic sensitivity |
| $c^*$, $\alpha^*$ | nutrient and antibiotic level |
| $\eta_i$, $\eta_{\phi,i}$ | dissipation parameters |
| $\gamma$ | Lagrange multiplier of $\sum_{l=0}^{n} \phi_l = 1$ |
| $\Psi$, $\Delta$, $C$ | free energy, dissipation function, constraint function |
| $K_p$ | coefficient of the barrier term |

**Coupling (Chapter 4)**

| | |
|---|---|
| $s$ | time link: the point model advances $s\,\Delta t$ per substep, fixed by the duration of the data |
| $\phi_{\min}$ | threshold of $\phi_{3D}$ for starting the point model at a Gauss point |
| $\bar{\phi}_i$ | living volume fraction of species $i$ in the point model, $\phi_i\psi_i$ |
| $a$, $\alpha^*$ | antibiotic field (the element's second nutrient) and its value in the point model |
| $n_{\text{sub}}$ | point-model steps per substep |
| $c_0^*$, $c_{\text{ref}}$ | nutrient level of the point model at the reference concentration $c_{\text{ref}}$ |

**Calibration (Chapter 3)**

| | |
|---|---|
| $\boldsymbol{\theta}$, $n_\theta$ | parameter vector, number of parameters (15) |
| $\tau_j$ | tempering exponent of stage $j$ |
| $c_v$ | target coefficient of variation of the weights |
| $N_p$, $K$ | number of samples, mutation steps per stage |
| $s_p$ | proposal scale |
| $\mathbf{S}$, $\lambda_S$ | sign prior from metabolic models, weight of its penalty |
| **Numerics** | |
| $h$, $\Delta t$ | element size, time step |
| $\lambda$ | $\beta \Delta t / h^2$, the stability measure of the explicit field update |
| $\lambda_{\max}$, $\rho$ | stability limit of $\lambda$; spectral radius of the discrete Laplacian |
| $N$, $\beta^*$ | number of neighbours and width [mm] of the weight of the NEM fit |

# 1 Introduction

## 1.1 Clinical Background: Oral Biofilm and Peri-implantitis

Dental implants have become a standard treatment for missing teeth; in the United States the share of adults with an implant rose from 0.7% in 1999–2000 to 5.7% in 2015–2016 [1]. Peri-implantitis, a progressive inflammatory condition of the tissue around an implant driven by biofilm, affects about one in five implant patients (patient-level prevalence 22% and 19.5% in two meta-analyses [2, 3]) and is a major cause of late implant loss [4–6]. It is linked to the multi-species communities that colonise the implant surface: dysbiotic shifts in the oral microbiome, driven by pathobionts such as *Porphyromonas gingivalis* (*Pg*) [7], trigger host immune responses that lead to bone resorption [8, 9].

The oral microbiome comprises more than 700 taxa that interact through mutualism, competition and metabolic cross-feeding [10, 11]. In a healthy host the community is dominated by early colonisers such as *Streptococcus oralis* (*So*) and *Actinomyces naeslundii* (*An*). A perturbation can shift it to a dysbiotic state in which late colonisers, most notably the low-abundance keystone pathogen *Pg* [12], sustain a positive feedback loop with the immune system [13].

A biofilm is also a mechanical body. It grows on a surface, and where it grows unevenly, or against a stiff substrate, it carries stresses that bear on detachment and on the loading of the tissue beneath. Which species are present, and where, therefore matters for the mechanics as well as for the biology. This thesis is about bringing these two descriptions together in a finite element setting.

## 1.2 Models of Biofilm Composition and Growth

### 1.2.1 Composition at a material point

The generalised Lotka–Volterra (gLV) system, with roots in classical population ecology [14, 15], is the standard model of microbial community dynamics [16–19]:

$$\dot{\phi}_i = \phi_i\Big(r_i + \sum_j A_{ij}\phi_j\Big), \quad i = 1, \dots, n, \tag{1.1}$$

with growth rates $r_i$ and interaction coefficients $A_{ij}$. Its $n^2$ interaction coefficients are poorly determined by typical time-course data [17, 20], and relative-abundance data carry a unit-sum constraint that the model does not respect [21, 22].

The extended Hamilton principle [23] derives the evolution of a biofilm from an energy and a dissipation functional. Applied to a material point with several species, it gives the point model of Klempt et al. [24]: volume fractions $\phi_i$ and viabilities $\psi_i$, the living fraction $\bar{\phi}_i = \phi_i\psi_i$, a symmetric interaction matrix $A_{ij}$ and a nutrient level $c^*$. Only the symmetric part of $A_{ij}$ enters the quadratic energy, so the matrix is taken symmetric, which

reduces the number of interaction coefficients to $n(n+1)/2$, 15 for five species. The model describes how the composition at one point evolves in time; it has no space.

### 1.2.2 Estimating the interactions

The interaction coefficients have to be estimated from measurements, and with five species and a few time points the problem is poorly posed. Bayesian inference quantifies the remaining uncertainty [25]. Transitional Markov chain Monte Carlo (TMCMC) [26, 27] passes from the prior to the posterior through a sequence of tempered distributions, which copes with the multimodal posteriors of this problem and parallelises over the samples; compiled with JAX [28], the forward model runs fast enough to make it practical. Where data are sparse, the signs of the interactions can be fixed beforehand from metabolic network models [29–31]: a species that feeds another implies $A_{ij} > 0$, competition implies $A_{ij} < 0$.

### 1.2.3 Growth in space

Continuum models of biofilm growth describe the biofilm as a field. In the model of Klempt et al. [32], also derived from the extended Hamilton principle, a biofilm field $\phi(\mathbf{X}, t)$ spreads towards a diffusing nutrient $c(\mathbf{X}, t)$, and the local growth enters the kinematics through the split $\mathbf{F} = \mathbf{F}_e\mathbf{F}_g$ with $\mathbf{F}_g = \alpha\mathbf{I}$. Where the growth is uneven or constrained, the elastic part $\mathbf{F}_e$ carries stress. The authors solve this model with a user element in ANSYS, and an earlier comparison of growth models showed pressure inside a growing biofilm and tension at its edge [33]. The same variational approach has been combined with experiments on *Pg* biofilms on titanium [34] and applied to tissue growth and turnover in atherosclerosis [35]. The field model has one biofilm variable; it does not say which species the biofilm consists of.

## 1.3 Objectives and Thesis Structure

The point model gives the composition but no space; the field model gives space and stress but no composition. The task of this thesis is to bring the point model into an existing, working finite element framework, so that the composition, the growth and the resulting stresses can be computed in space. The framework is the biofilm element developed at the Institut für Kontinuumsmechanik, which solves the field model of Klempt et al. 2024 in ANSYS.

Figure 1.1 shows how the parts fit together.

I make three contributions:

1. *A calibrated point model* (Chapter 3). The 15 interaction coefficients of a five-species point model are estimated with TMCMC from the in-vitro time courses of Heine et al. [36] under four conditions (commensal and dysbiotic, static and in a HOBIC flow reactor). A final section shows how sign constraints from metabolic models carry the same model to sparse in-vivo data; this part was done during an internship.

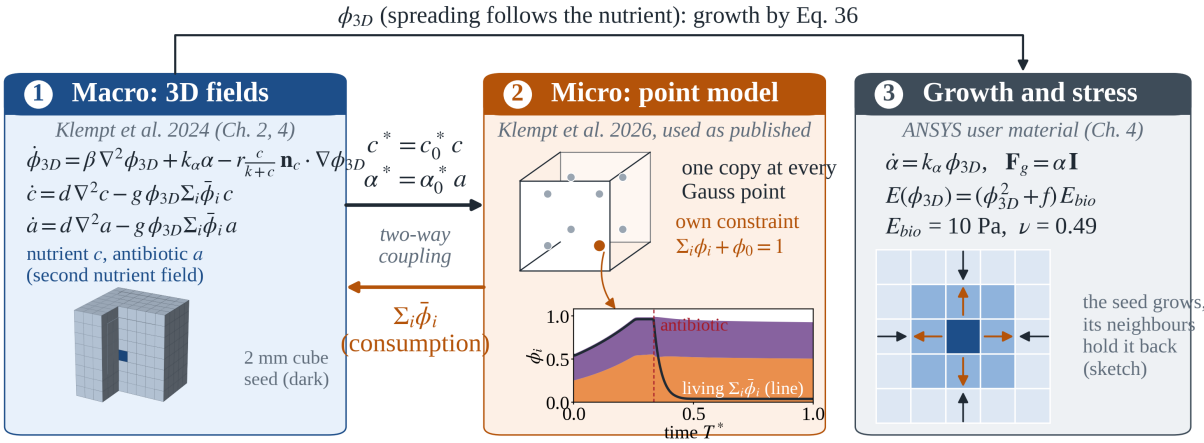



Figure 1.1: Overview of this work. (1) The fields of Klempt et al. 2024 in the IKM element: the biofilm $\phi_{3D}$, the nutrient $c$ and, in the element's second nutrient field, an antibiotic $a$. (2) One copy of the point model of Klempt et al. 2026 at every Gauss point, used as published with its own constraint; it receives $c^*$ and $\alpha^*$ from the fields and returns $\phi_i$, $\psi_i$. Its living volume fraction $\sum_i \bar{\phi}_i$ scales the consumption of $c$ and $a$, and $c$ enters the spreading of $\phi_{3D}$. (3) The growth $\alpha$ and the stresses follow from $\phi_{3D}$ (Eq. 36 of Klempt et al. 2024). The inset in (2) is computed (synthetic two-species case of Fritsch et al., antibiotic from $T^* = 0.5$); the stress pattern in (3) is a sketch.

2. *A growth law in the finite element framework* (Chapter 4). The growth kinematics $\mathbf{F}_g = \alpha \mathbf{I}$ is implemented as an ANSYS user material, verified against closed-form solutions, and coupled to the element's biofilm field through the growth equation of Klempt et al. 2024 at every Gauss point.

3. *The point model at every Gauss point* (Chapter 4). The point model of Klempt et al. 2026 runs, unchanged, at every Gauss point; it receives the nutrient and an antibiotic from fields of the element, and its living biomass sets the consumption of both. The coupled point model reproduces the point model alone, and the time of both models is linked through the duration of the data. Two-species examples with an antibiotic are verified on refined grids and against the element.

The thesis covers one and two species, for which the papers give numbers to check against. More species and a coupling in which the composition acts back on growth and stiffness are left to the continuation of this work at Keio University.

Chapter 2 sets out the background: the extended Hamilton principle, the field model of Klempt et al. 2024, the point model of Klempt et al. 2026 and Bayesian inference with TMCMC. Chapter 3 calibrates the point model. Chapter 4 brings it into the ANSYS element, with the verification, the results for one and two species and their limits. Chapter 5 summarises the results and outlines the continuation.

# 2 Theoretical Background

This chapter collects the two models that the thesis connects and the inference method used to calibrate one of them. Both models are derived from the extended Hamilton principle (Section 2.1). The field model of Klempt et al. 2024 describes a single biofilm phase that grows in space and carries stress (Section 2.2); the point model of Klempt et al. 2026 describes the composition of several species at one material point (Section 2.3). Section 2.5 states how the two are combined in this thesis, and Sections 2.6 and 2.7 cover Bayesian inference with TMCMC and the metabolic sign prior.

## 2.1 Extended Hamilton Principle

The extended Hamilton principle [23] derives the governing equations of a dissipative material from one stationarity condition. For a quasi-static, isothermal process it reads, in the form used by Klempt et al. [32] (their Eq. 19),

$$\mathcal{H} = \int_\tau \big(\mathcal{G} + \mathcal{C} - \mathcal{B} + \mathcal{D}\big)\,\mathrm{d}t \;\to\; \operatorname*{stat}_{\mathbf{u},\boldsymbol{\xi}}, \tag{2.1}$$

with the Gibbs energy $\mathcal{G}$ of the body (stored energy minus the work of external loads), constraint terms $\mathcal{C}$, a non-conservative source $\mathcal{B}$ (growth), and the dissipation $\mathcal{D}$. The displacement $\mathbf{u}$ and the internal variables $\boldsymbol{\xi}$ are varied independently. The dissipation is modelled by a dissipation function, here rate-dependent and quadratic, $\Delta^{\mathrm{diss}} = \frac{\eta}{2}\|\dot{\boldsymbol{\xi}}\|^2$, whose derivative $\partial\Delta^{\mathrm{diss}}/\partial\dot{\boldsymbol{\xi}}$ gives the non-conservative forces. Stationarity with respect to $\mathbf{u}$ gives the balance of linear momentum in weak form; stationarity with respect to each internal variable gives its evolution equation. A model is then fixed by choosing the energy, the source and the dissipation function. For the point model of Chapter 3, which has no displacement field, the principle reduces to its local form, the principle of the minimum of the dissipation potential [37, 38]: $\dot{\Psi} + \Delta + C \to \mathrm{stat}$ with respect to the rates of the internal variables and the Lagrange multiplier. A recent account of this variational framework for dissipative materials is given by Junker, Bode and Hackl [39].

## 2.2 The Growth Field of Klempt et al. 2024

### 2.2.1 Variables and kinematics

Klempt et al. [32] describe a biofilm growing into a void that holds a nutrient. The state is given by the displacement $\mathbf{u}(\mathbf{X}, t)$ and three internal variables:

- the biofilm state variable $\phi(\mathbf{X}, t) \in [0, 1]$, 1 in biofilm and 0 in the void;
- the nutrient concentration $c(\mathbf{X}, t)$;
- the local expansion $\alpha(\mathbf{X}, t)$, an internal variable at the Gauss points.

Growth enters the kinematics through the multiplicative split of the deformation gradient [40],

$$\mathbf{F} = \mathbf{F}_e\mathbf{F}_g, \qquad \mathbf{F}_g = \alpha\,\mathbf{I}, \qquad \alpha(t=0) = 1, \tag{2.2}$$

so that $\alpha - 1$ is the isotropic growth strain. The elastic part $\mathbf{F}_e$ carries the stress. The paper treats the biofilm as incompressible, $\det \mathbf{F}_e = 1$, enforced by a pressure $p$; in this thesis the constraint is replaced by a nearly incompressible material with $\nu = 0.49$ (Chapter 4).

### 2.2.2 Energy, growth and consumption

The energy density (Eq. 20 of the paper) is

$$\Psi = \phi^2\,\frac{\mu}{2}\big(\mathbf{I} : \mathbf{C}_e - 3\big) + \frac{\bar\beta}{2}\|\nabla_X\phi\|^2 + \frac{\bar d}{2}\|\nabla_X c\|^2 - \bar k_\alpha\,\alpha\,\phi, \tag{2.3}$$

with $\mathbf{C}_e = \mathbf{F}_e^{\mathrm{T}}\mathbf{F}_e$. The first term is a neo-Hookean material whose stiffness is weighted by $\phi^2$, so the void carries no stiffness. The two gradient terms regularise $\phi$ and $c$, and the last term links the expansion $\alpha$ to the biofilm.

The growth source spreads the biofilm towards the nutrient. It is the product of a Monod function and an orientation function (Eqs. 21–23),

$$h^*_\phi = \tilde r(c)\,o(\nabla_X\phi, \nabla_X c), \qquad \tilde r(c) = \|\nabla_X\phi\|\,\frac{\bar r\,c}{k + c}, \qquad o = \mathbf{n}_{\nabla\phi}\cdot\mathbf{n}_{\nabla c}, \tag{2.4}$$

with the unit vectors $\mathbf{n}_{\nabla\phi} = \nabla_X\phi/\|\nabla_X\phi\|$ and $\mathbf{n}_{\nabla c} = \nabla_X c/\|\nabla_X c\|$. The factor $\|\nabla_X\phi\|$ restricts this growth to the interface between biofilm and void. Consumption is linear in the biofilm as printed (Eq. 24), $g^*_c = \bar g\,\phi$; the authors confirmed that their implementation uses $\bar g\,\phi\,c$ (see below).

### 2.2.3 Evolution equations

Stationarity of (2.1) with respect to $\phi$, $c$ and $\alpha$ gives three evolution equations. The paper neglects the mechanical term $\phi\mu(\mathbf{I} : \mathbf{C}_e - 3)$ in the equation for $\phi$, so that growth is driven by the nutrient only and the coupling to the mechanics is one-way. After division by the viscosities, and with the parameters written without the bar, the equations are, as printed (Eqs. 34–36),

$$\dot\phi - \beta\nabla_X^2\phi - k_\alpha\,\alpha + \|\nabla_X\phi\|\,\frac{r\,c}{k + c}\,\mathbf{n}_{\nabla\phi}\cdot\mathbf{n}_{\nabla c} = 0, \tag{2.5}$$

$$\dot c - d\,\nabla_X^2 c + g\,\phi = 0, \tag{2.6}$$

$$\dot\alpha - k_\alpha\,\phi = 0, \tag{2.7}$$

with zero-flux conditions for $\phi$ and $c$ on the boundary. The authors confirmed that their implementation uses the consumption $g\,\phi\,c$ instead of the printed $g\,\phi$, so that the nutrient equation in the form used for the implementation is

$$\dot c - d\,\nabla_X^2 c + g\,\phi\,c = 0. \tag{2.8}$$

The numbers in Chapter 4 are computed with the printed form (2.6) unless stated otherwise. Time is normalised and written in units of $T^*$. The parameters of Table 2 of the paper are listed in Table 2.1.

Table 2.1: Parameters of Klempt et al. [32], Table 2. The shear modulus corresponds to $E = 10$ Pa and $\nu = 0.49$.

| parameter | symbol | value | unit |
|---|---|---|---|
| shear modulus | $\mu$ | 3.3557 | Pa |
| nutrient diffusivity | $d$ | $10^{10}$ | $\mu\mathrm{m}^2\, T^{*-1}$ |
| phase-field regularisation | $\beta$ | 2 | $\mu\mathrm{m}^2\, T^{*-1}$ |
| growth factor | $k_\alpha$ | $10^{-3}$ | $T^{*-1}$ |
| half-velocity constant | $k$ | 1 | – |
| consumption | $g$ | $10^8$ | $T^{*-1}$ |
| growth parameter | $r$ | 100 | $T^{*-1}$ |

Three points of the paper are relevant here.

- *The law for $\alpha$.* Equation (2.7) lets the biofilm expand wherever it is present. The algorithm in Table 1 of the paper instead updates $\alpha$ from the change of $\phi$, so that a biofilm that is full from the start does not grow. The text says that $\alpha$ is governed by Eq. 36; I follow Eq. (2.7), as does the element used in Chapter 4.
- *The unit of $\mu$.* The text gives $\mu$ in MPa, Table 2 in Pa. I use the table.
- *The printed growth term.* Solved as printed, Eq. (2.5) moves the seeded colony towards the nutrient rather than enlarging it, and the published curves of mean $\phi$ are not reached. My reproduction of the paper's test cases needs growth on both faces of the colony and a consumption proportional to $\phi c$ (Appendix C). The authors confirmed the consumption $g\,\phi\,c$; their answers are given in the appendix.

## 2.3 The Point Model of Klempt et al. 2026

### 2.3.1 State variables

Klempt et al. [24] describe several interacting species at one material point. Species $i = 1, \ldots, n$ has the volume fraction $\phi_i \in [0, 1]$ and the viability $\psi_i \in [0, 1]$, the fraction of living cells in it. The living volume fraction is

$$\bar{\phi}_i := \phi_i\, \psi_i, \qquad i = 1, \ldots, n. \tag{2.9}$$

A further fraction $\phi_0$ represents the empty space, and the fractions sum to one,

$$\sum_{l=0}^{n} \phi_l(t) = 1 \quad \forall\, t. \tag{2.10}$$

The authors describe $\phi_0$ as a numerical auxiliary variable and caution against reading it as physical void.

### 2.3.2 Energy, dissipation and evolution equations

The energy contains the nutrient-driven interaction of the living fractions and the effect of an antibiotic on the viabilities,

$$\Psi = -\tfrac{1}{2}\, c^*\, \bar{\boldsymbol{\phi}}^{\mathrm{T}} \mathbf{A}\, \bar{\boldsymbol{\phi}} + \tfrac{1}{2}\, \alpha^*\, \boldsymbol{\psi}^{\mathrm{T}} \mathbf{B}\, \boldsymbol{\psi}, \tag{2.11}$$

with the nutrient level $c^*$, the antibiotic level $\alpha^*$, the symmetric interaction matrix $\mathbf{A}$ and $\mathbf{B} = \mathrm{diag}(b_1, \ldots, b_n)$. The constraint (2.10) enters through the constraint function $C = \gamma\Big(\sum_{l=0}^{n} \phi_l - 1\Big)$ with a Lagrange multiplier $\gamma$, and the dissipation function is

$$\Delta = \tfrac{1}{2}\, \dot{\bar{\boldsymbol{\phi}}}^{\mathrm{T}} \boldsymbol{\eta}\, \dot{\bar{\boldsymbol{\phi}}} + \tfrac{1}{2}\, \dot{\boldsymbol{\phi}}^{\mathrm{T}} \boldsymbol{\eta}\, \dot{\boldsymbol{\phi}}, \qquad \boldsymbol{\eta} = \mathrm{diag}(\eta_1, \ldots, \eta_n). \tag{2.12}$$

The second term is needed because the first alone gives a singular system: $\bar{\phi}_i = \phi_i \psi_i$ couples the two rates.

The stationarity conditions of $\dot{\Psi} + \Delta + C$ with respect to the rates $\dot{\phi}_i$, $\dot{\psi}_i$, $\dot{\phi}_0$ and to $\gamma$ give

$$0 = -c^*\, \psi_i \left(\mathbf{A}\bar{\boldsymbol{\phi}}\right)_i + \eta_i\Big(\dot{\phi}_i\, \psi_i^2 + \bar{\phi}_i\, \dot{\psi}_i + \dot{\phi}_i\Big) + \gamma, \tag{2.13}$$

$$0 = -c^*\, \phi_i \left(\mathbf{A}\bar{\boldsymbol{\phi}}\right)_i + \alpha^*\, b_i\, \psi_i + \eta_i\Big(\dot{\psi}_i\, \phi_i^2 + \bar{\phi}_i\, \dot{\phi}_i\Big), \tag{2.14}$$

$$0 = \gamma + \dot{\phi}_0, \qquad 0 = \sum_{l=0}^{n} \phi_l - 1. \tag{2.15}$$

The equation for $\psi_i$ has no $\gamma$, because $\psi_i$ does not appear in the constraint. The paper prints Eq. 17 with a $+\gamma$; with it, even the two-species examples of the paper are not reproduced; without it, all fourteen examples are (Section 2.3.4).

The system (2.13)–(2.15) has $2n + 2$ unknowns. It is integrated with the implicit Euler method and Newton iterations; a barrier term $K_p/[x^2(1-x)^2]$, which diverges at $x = 0$ and $x = 1$, with $K_p = \eta_i \times 10^{-4}$ keeps $\phi_i$, $\psi_i$ and $\phi_0$ inside $(0, 1)$ and is omitted above. Numerical treatments that keep such constraints satisfied in constitutive models are compared by Bode et al. [41].

### 2.3.3 Symmetry and scale

The antisymmetric part of $\mathbf{A}$ does not contribute to the quadratic form (2.11), so $\mathbf{A}$ is taken symmetric; this reduces the number of interaction coefficients from $n^2$ to $n(n+1)/2$ and keeps the gradient-flow structure that the variational derivation provides [23]. Biologically, symmetry is a reasonable approximation for interactions mediated by metabolites in a shared pool [10]; directional effects such as toxin secretion are excluded.

The nutrient level enters only through the product $c^*\mathbf{A}$, so $c^*$ and the scale of $\mathbf{A}$ cannot be identified separately. In the calibration of Chapter 3 I fix $c^* = 25$ and $\eta_i = 1$, which keeps the coefficients of order one; the paper's examples use $c^* = 100$ and species-dependent $\eta_i$. The data of Heine et al. involve no antibiotic, so $\alpha^* = 0$ there.

### 2.3.4 Check against the paper

The integrator used in this thesis reproduces all fourteen numerical examples of the paper (six two-species cases of its Table 1, four variants of its Appendix A and the four four-species cases), within the accuracy with which values can be read off its figures. Two printed details disagree with the paper's own figures: the $+\gamma$ in Eq. 17 discussed above, and a factor $\frac{1}{2}$ in front of the four-species matrix of Eq. 19 of Klempt et al. 2026; the four-species figures are reproduced only when it is dropped. For two species, case 3 ends at $\bar{\phi}_1 = 0.5945$, $\bar{\phi}_2 = 0.3926$, against 0.60 and 0.40 read from the paper.

## 2.4 Relation to the Replicator Equation

It is useful to relate the point model to the *replicator equation* of evolutionary game theory [42, 43],

$$\dot{\phi}_i = \phi_i \Big[ \big(\mathbf{A}\boldsymbol{\phi}\big)_i - \boldsymbol{\phi}^{\mathrm{T}}\mathbf{A}\boldsymbol{\phi} \Big], \qquad \sum_i \phi_i = 1, \tag{2.16}$$

in which the mean fitness $\boldsymbol{\phi}^{\mathrm{T}}\mathbf{A}\boldsymbol{\phi}$ keeps the composition on the simplex. For a symmetric $\mathbf{A}$, (2.16) is a gradient flow of $W(\boldsymbol{\phi}) = \frac{1}{2}\boldsymbol{\phi}^{\mathrm{T}}\mathbf{A}\boldsymbol{\phi}$ with respect to the Shahshahani metric $g_{ij} = \delta_{ij}/\phi_i$, and $W$ increases monotonically [42, 44]. The point model uses a constant viscosity instead of this $\phi_i$-weighted metric; with $\psi_i \equiv 1$ its well-mixed limit is the affine projection $\dot{\phi}_i \propto (\mathbf{A}\boldsymbol{\phi})_i - \langle \mathbf{A}\boldsymbol{\phi} \rangle$. The two have the same fixed points and the same sign structure.

Compared with the generalised Lotka–Volterra model (1.1), the replicator form has a symmetric $\mathbf{A}$ with $n(n+1)/2$ coefficients and keeps $\sum_i \phi_i = 1$ without a separate normalisation. Its interior fixed points satisfy $(\mathbf{A}\boldsymbol{\phi}^*)_i = \boldsymbol{\phi}^{*\mathrm{T}}\mathbf{A}\boldsymbol{\phi}^*$ for every $i$ with $\phi_i^* > 0$. If $\mathbf{A}$ is negative definite on the tangent space $\{\mathbf{x} : \sum_i x_i = 0\}$ of the simplex, $W$ is strictly concave there, so there is at most one interior fixed point; when it exists, it is the maximum of $W$ and attracts every interior trajectory.

## 2.5 Combining the Two Models

The field model has a single biofilm variable $\phi$ and says where the biofilm is and how much there is; it does not distinguish species. The point model distinguishes species but has no space. Klempt et al. 2024 drop the mechanical term in the equation for $\phi$, so in their model the stress does not act back on growth. I combine the two models as follows:

- the field model, solved by the element, gives the biofilm $\phi_{3D}$, the nutrient $c$ and, in its second nutrient field, an antibiotic, and through Eq. (2.7) the growth $\alpha$ and the stress;
- the point model runs, unchanged, at every Gauss point; it receives the nutrient and the antibiotic from the fields and returns $\phi_i$ and $\psi_i$;
- only its living biomass, $\sum_i \phi_i\psi_i$, consumes the nutrient and takes up the antibiotic, and the nutrient steers the spreading of $\phi_{3D}$ through the front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$.

How the two times are linked is given in Chapter 4. The stress does not act back, and the composition does not act on the stiffness; these directions are outlined as future work.

## 2.6 Bayesian Inference and TMCMC

### 2.6.1 Bayesian parameter identification

Given observed species trajectories $\mathbf{y} = \{\mathbf{y}_t\}_{t=1}^{N_t}$ and a forward model parameterised by the interaction vector $\boldsymbol{\theta} \in \mathbb{R}^{15}$, Bayesian inference seeks the posterior distribution

$$p(\boldsymbol{\theta} \mid \mathbf{y}) \;\propto\; \mathcal{L}(\mathbf{y} \mid \boldsymbol{\theta})\, p(\boldsymbol{\theta}), \tag{2.17}$$

with the likelihood $\mathcal{L}(\mathbf{y} \mid \boldsymbol{\theta})$ and the prior $p(\boldsymbol{\theta})$. I use a Gaussian likelihood with isotropic noise,

$$\mathcal{L}(\mathbf{y} \mid \boldsymbol{\theta}) = \prod_{t,i} \mathcal{N}\Big(y_{t,i} \mid \hat{\phi}_i(t;\boldsymbol{\theta}),\, \sigma^2\Big), \tag{2.18}$$

where $\hat{\phi}_i(t;\boldsymbol{\theta})$ is the solution of the point model at time $t$.

### 2.6.2 Transitional Markov chain Monte Carlo

TMCMC [26, 27] constructs a sequence of intermediate distributions between the prior and the posterior through a tempering schedule $0 = \tau_0 < \tau_1 < \cdots < \tau_J = 1$,

$$p_j(\boldsymbol{\theta}) \propto \mathcal{L}(\mathbf{y} \mid \boldsymbol{\theta})^{\tau_j}\, p(\boldsymbol{\theta}). \tag{2.19}$$

At each stage $j$ the samples are weighted by $w_j^{(k)} \propto \mathcal{L}^{\tau_j - \tau_{j-1}}$, resampled, and moved by short Metropolis–Hastings chains. The next exponent $\tau_j$ is chosen so that the coefficient of variation of the weights stays at a target value, typically $c_v = 1$.

**Computation on the GPU.** The cost lies in the forward model, evaluated for every sample at every stage. I compile the point model with JAX [28] and evaluate the whole ensemble, $N_p = 5{,}000$ to $20{,}000$ particles at the final stage, in one batched call (`jax.vmap`). This is about 150 times faster than the CPU baseline (Section 3.2.4).

**Narrowed priors.** For the multimodal posterior of the dysbiotic condition I run TMCMC twice: the mean and standard deviation of the first posterior define a narrower prior for the second run.

**Identifiability.** To see which parameters the data determine, I use the ratio

$$r_i \;=\; \frac{\sigma_{\mathrm{post},i}}{\Delta_{\mathrm{prior},i}} \tag{2.20}$$

of the posterior standard deviation of $\theta_i$ to its prior width. A value $r_i \ll 1$ means the data constrain $\theta_i$; $r_i \to 1$ means the prior does. Chapter 3 uses this ratio, with the threshold 0.8 relative to a uniform prior, to classify the entries as identified or not.

## 2.7 Metabolic Sign Priors

Where the data are too sparse to determine the interaction coefficients, their signs can be fixed beforehand from metabolic models. Flux balance analysis (FBA) predicts the metabolic fluxes $\mathbf{v}$ of an organism at steady state [29, 31],

$$\max_{\mathbf{v}} \ \mathbf{w}^{\mathrm{T}}\mathbf{v} \quad \text{s.t.} \quad \mathbf{N}\mathbf{v} = \mathbf{0},\ \mathbf{lb} \le \mathbf{v} \le \mathbf{ub}, \tag{2.21}$$

with the stoichiometric matrix $\mathbf{N}$, an objective $\mathbf{w}$ (usually biomass production) and bounds on the fluxes. Parsimonious FBA [45] additionally minimises the total flux, and MICOM [30] couples the models of several species through shared metabolites. From the predicted exchange between two species follows the sign of their interaction: a species that feeds another implies $A_{ij} > 0$, competition implies $A_{ij} < 0$.

The sign prior $\mathbf{S} \in \{-1, 0, +1\}^{n \times n}$ enters the inference as a penalty on coefficients of the wrong sign,

$$\mathcal{R}(\boldsymbol{\theta}; \mathbf{S}) = \lambda_S \sum_{i,j:\, S_{ij} \neq 0} \max\Big(0,\ -S_{ij}\, A_{ij}\Big)^2, \tag{2.22}$$

with the weight $\lambda_S$, and leaves coefficients of the right sign free. Only the sign is used, not the magnitude: predicted interaction strengths of genome-scale models agree poorly with measured ones, while their signs carry useful information [46], and no derivation links metabolic fluxes to the dimensionless coefficients of $\mathbf{A}$ [47, 48]. Section 3.6 applies this prior to in-vivo data.

# 3 GPU-Accelerated Bayesian Inference for a Five-Species Biofilm

This chapter calibrates the point model of Chapter 2 on the in-vitro time courses of a defined five-species oral biofilm of Heine et al. [36, 49]. The unknowns are the 15 entries of the symmetric interaction matrix $\mathbf{A}$. They are effective parameters of the model, and the main result of the chapter is a statement, entry by entry, of what the data determine and what they leave open. The last section carries the same type of model to sparse in-vivo data with a metabolic sign prior (Section 3.6), and Chapter 4 brings the point model into a finite element framework.

*This chapter is based on the manuscript* [50]: Nishioka K., Klempt F., Geisler H., Mukherjee R., Heine N., Doll-Nikutta K., Stiesch M., Szafrański S.P., Soleimani M., Junker P., "Identifiability of species interactions in a living material: Bayesian calibration of an extended Hamilton principle multiphase model" (in preparation for *Extreme Mechanics Letters*). All runs of this chapter, with their configurations, convergence records and posterior samples, are archived; an earlier set of calibrations from March and April 2026, whose configurations were not kept, is not used.

## 3.1 Experimental System

Heine et al. [49] cultivated a defined consortium of five oral taxa, *Streptococcus oralis* (*So*), *Actinomyces naeslundii* (*An*), *Veillonella* (*Vei*), *Fusobacterium nucleatum* (*Fn*) and *Porphyromonas gingivalis* (*Pg*), from early colonisers to the late anaerobic pathogen. The experiment crosses the *community* (commensal or dysbiotic) with the *cultivation* (static or the HOBIC flow reactor), which gives the four conditions used throughout this thesis: Commensal Static (CS), Commensal HOBIC (CH), Dysbiotic Static (DS) and Dysbiotic HOBIC (DH). The two communities differ not only in their ecological state but also in the *Veillonella* species (*V. dispar* and *V. parvula*) and in the *Pg* strain (DSM 20709 and W83).

The composition data are the species fractions of viable cells at days 3, 6, 10, 15 and 21, measured by quantitative real-time PCR after propidium monoazide (PMA) treatment, and the total-count fractions without PMA measured on the same samples. I use the measured replicate values provided by the authors (three to five biological replicates per time point, each in technical triplicate) and the medians over them. Values read off the published box plots deviate from these by up to 0.42 in a species fraction in the dysbiotic conditions, so they are not used. The measured data are available from the authors on request and are not reproduced in this thesis; only summary numbers and figures are shown.

The day-1 composition, the earliest measurement, is the initial state of the model at $t = 0$. Model time is the time since inoculation, $t = s\,d$ with $s = 0.2375/21$; in the flow reactor the inoculated medium is replaced after 24 h, so the growth phase there can also

be taken to start at day 1. The viable and the total-count compositions differ (RMSE between their medians 0.101, 0.087, 0.119 and 0.087 in CS, CH, DS and DH) because the species differ in viability, so each is compared with its own model counterpart.

The fraction of membrane-intact cells from SYTO9/propidium iodide staining is image based and *not* resolved by species; per time point it is the mean over 15–45 confocal images, five per biofilm. It enters the inference as the community live fraction. The pH, measured in the flow reactor, is not used in the inference and serves as a check (Section 3.4).

## 3.2 Inference Setup

The forward model is the coupled $\boldsymbol{\phi}$–$\boldsymbol{\psi}$ system of Section 2.1, integrated by implicit Euler with Newton's method (2,500 steps over the 21 days) with a barrier term that diverges at 0 and 1 and keeps $\phi_i$ and $\psi_i$ inside $(0, 1)$. Only the product $c^* a_{ij}$ enters, so $c^* = 25$ fixes the scale (Section 2.4); the assays contain no antibiotic, so $\alpha^* = 0$.

### 3.2.1 The 15-parameter interaction matrix

Only the symmetric part of $\mathbf{A}$ enters the quadratic free energy, so $\mathbf{A}$ is symmetric with 15 independent entries $a_{ij}$, $i \le j$. Each coefficient is an effective, undirected interaction of the model: it lumps mechanisms the model does not resolve, such as metabolite exchange, co-aggregation or the pH. Table 3.1 lists the interactions documented for this consortium. All 15 entries are estimated, none is set to zero, and agreement with the table is read as consistency with the literature, not as the measurement of a mechanism.

| Pair | Documented mechanism | Status |
|---|---|---|
| *So–An* | Co-aggregation | documented |
| *So–Vei* | Lactate cross-feeding | documented |
| *So–Fn* | Formate exchange | documented |
| *An–Vei* | Co-aggregation | documented |
| *Fn–Pg* | Co-aggregation | documented |
| *Vei–Pg* | Through the pH | hypothesis |

Table 3.1: Interactions documented for the consortium [10, 49]. The model coefficients are symmetric and carry no direction.

### 3.2.2 Likelihood

The viable fractions $y^{\mathrm{v}}_{ik}$ at time $t_k$ are compared with the living volume fractions $\hat{y}^{\mathrm{v}}_{ik} = \phi_i\psi_i / \sum_j \phi_j\psi_j$, the total-count fractions $y^{\mathrm{t}}_{ik}$ with $\hat{y}^{\mathrm{t}}_{ik} = \phi_i / \sum_j \phi_j$, and the community live fraction $\ell_k$ with $\hat{\ell}_k = \sum_i \phi_i\psi_i / \sum_i \phi_i$, through the weighted Gaussian log-likelihood

$$\ln p(\mathbf{y}_{\mathrm{obs}} \mid \boldsymbol{\theta}) = -\frac{1}{2} \sum_k \sum_{i=1}^{5} w_{ik} \left[ \frac{\left(y^{\mathrm{v}}_{ik} - \hat{y}^{\mathrm{v}}_{ik}\right)^2}{(\sigma^{\mathrm{v}}_{ik})^2} + \frac{\left(y^{\mathrm{t}}_{ik} - \hat{y}^{\mathrm{t}}_{ik}\right)^2}{(\sigma^{\mathrm{t}}_{ik})^2} \right] - \frac{\lambda_\psi}{2} \sum_k \frac{(\ell_k - \hat{\ell}_k)^2}{\sigma_\ell^2} + \text{const.} \tag{3.1}$$

The standard deviations $\sigma^{\mathrm{v}}_{ik}$ and $\sigma^{\mathrm{t}}_{ik}$ are estimated from the spread of the measured replicates (interquartile range divided by 1.35, at least 0.05), and $\sigma_\ell$ is the standard

deviation of the live fraction between biofilms, averaged over the time points. The weights $w_{ik}$ act on both compositions alike: they up-weight *Pg* ($\lambda_{\mathrm{Pg}} = 5$), whose late increase is the main dynamic feature of the dysbiotic data, and the last two time points ($\lambda_{\mathrm{late}} = 3$), and down-weight species with a mean fraction below 5 % ($\lambda_{\mathrm{rare}} = 0.1$). The live fraction is weighted by $\lambda_\psi = 1.5$ in the commensal conditions, 2.0 in DS and 3.0 in DH. The pH does not enter.

In stages (i) and (ii) below, the viabilities are not evolved but fixed to the values implied by the two compositions and the live fraction, $\psi_i(t_k) = (y^{\mathrm{v}}_{ik}/y^{\mathrm{t}}_{ik})\,\ell_k$, clipped to $[0.01, 0.99]$ (the community value $\ell_k$ for species below 2 % of the total count), and the live-fraction term is omitted. These fixed values are uncertain (the median width of their 90 % intervals is 0.57), so they serve only to start the inference and as a check, not as data in the likelihood. In stages (iii) and (iv), $\psi_i$ follows Eq. (2.14) and all three terms are used.

### 3.2.3 Prior and four stages

The prior is uniform on a box $[l_k, u_k]$ for each entry. The first boxes were set from earlier calibrations of a previous version of the model on the same data, and some of them exclude negative values or allow only small ones, so the signs of these entries are partly set by the prior in the first two stages; all of these bounds are widened in stage (iii). Inference proceeds in four stages on the same data (Figure 3.1): (i) the two composition terms with $\psi_i$ fixed to the data, on the box; (ii) as (i), on the box narrowed to the stage-(i) posterior mean $\pm 4$ standard deviations; (iii) the full likelihood with $\psi_i$ evolved, back on the full box, half of the initial particles drawn around the stage-(ii) MAP and half from the prior; (iv) as (iii), on the box narrowed to the stage-(iii) posterior mean $\pm 4$ standard deviations. A $\pm 4$ standard deviation box removes less than $10^{-4}$ of a Gaussian marginal, so narrowing shortens the tempering without truncating the posterior. If more than 20 % of the posterior mass of an entry lies in the outer 5 % of the box on one side, the bound is moved outwards and the stage is repeated.

### 3.2.4 TMCMC on the GPU and acceptance criteria

TMCMC [26, 51] passes a particle population through the tempered posteriors $p_m(\boldsymbol{\theta}) \propto p(\mathbf{y}_{\mathrm{obs}} \mid \boldsymbol{\theta})^{\beta_m} p(\boldsymbol{\theta})$, $0 = \beta_0 < \cdots < \beta_K = 1$, choosing each increment so that the coefficient of variation of the importance weights stays at a target value [27]. After resampling, every particle performs $n_{\mathrm{mut}}$ Metropolis–Hastings steps, with random-walk proposals scaled by the weighted particle covariance alternating with differential-evolution proposals [52]; proposals outside the box are rejected without solving the model. A run needs $10^5$ to $3 \times 10^7$ model solutions. I compile the implicit solver, with the Jacobian assembly and the linear solve, into a single XLA kernel with JAX and evaluate all particles at once with `vmap`. On one GPU this is 170 times faster per tempering step than a 12-core CPU at matched settings, and 147 times end to end (Table 3.2), which makes it affordable to repeat every stage with three seeds. General gradient-based samplers (HMC/NUTS) were not used.

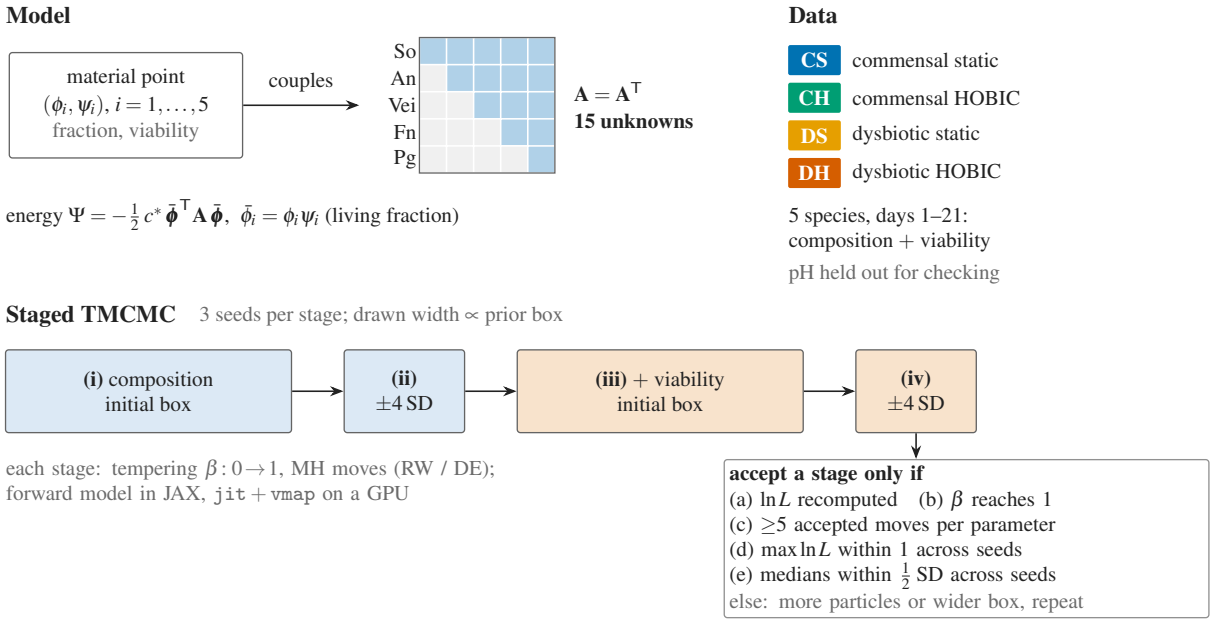



Figure 3.1: Model and inference. A material point carries the volume fractions $\phi_i$ and viabilities $\psi_i$ of five taxa, coupled through the symmetric matrix $\mathbf{A}$ (15 unknowns). TMCMC with a GPU-compiled forward model infers $\mathbf{A}$ in four stages, first with the viabilities fixed to the data, then with them evolved; every stage is accepted only after the checks (a)–(e) of Section 3.2.4.

| **Metric** | **CPU (12 cores)** | **GPU (RTX 4090)** | **Speedup** |
|---|---|---|---|
| *Matched benchmark (DH, $N_p = 500$, 9 tempering steps):* | | | |
| Per step | 2,400 s | 14 s | 170× |
| Total | 21,600 s | 147 s | 147× |
| *Final stage of this chapter (one seed, GPU):* | | | |
| CS, CH, $N_p = 5{,}000$ | | 7.1–8.7 h | |
| DS, $N_p = 18{,}000$ | | 17.1–18.9 h | |
| DH (stage iii), $N_p = 20{,}000$ | | 21.1–22.7 h | |

Table 3.2: Computational cost. The matched benchmark isolates the GPU speedup; the run times are wall-clock times per seed, with $n_{\text{mut}} = 150$ (120 in DH).

Every stage is run with three independent seeds and accepted only if (a) the stored log-likelihood of every particle agrees with a recomputation; (b) the tempering reaches $\beta = 1$; (c) each particle is moved at least twice per tempering step and at least five times per free parameter over the run; (d) the maximum log-likelihood differs by at most 1 across seeds; and (e) every posterior median differs across seeds by at most half a posterior standard deviation. An entry whose pooled posterior standard deviation is at least 0.8 times that of a uniform distribution on the prior box is reported as *not identified* and excluded from (e); for an entry with several posterior modes, (e) is applied within each mode. All other entries are called *identified*: the data constrain them beyond their prior box. Stages (ii)–(iv) that fail are repeated with more particles or mutation steps and are not interpreted. Stage (i) is exploratory: it sets the box of stage (ii) and gives the evidence estimates, which are read only as indications.

## 3.3 Results

### 3.3.1 Fit and convergence

Stages (ii)–(iv) of CS and CH and stages (iii)–(iv) of DS meet the criteria (a)–(e) with three seeds each; DS stage (ii) fails (d), because one seed found a higher mode (spread of the maximum log-likelihood 1.70). In DH, stage (iii) meets them, but at stage (iv) the seeds settle in different posterior modes: criterion (e) fails, with the medians of $a_{22}$ differing by 0.79 posterior standard deviations. The DH results are therefore taken from stage (iii), and this split is discussed as a limitation in Section 3.5. At the final stage the MAP reproduces the viable composition with an RMSE of 0.087 (CS), 0.059 (CH), 0.058 (DS) and 0.073 (DH), the total-count composition with 0.039, 0.078, 0.080 and 0.159, and the community live fraction with 0.23, 0.12, 0.09 and 0.07 (Figure 3.2, Table 3.3). Accepting a stage often needed more than one attempt: posterior mass accumulated at a bound of the initial box in every condition and was released by widening that bound, and the dysbiotic conditions needed more particles. Without the criteria, several of these runs would have been read as converged.

| | | RMSE of the MAP | | | | |
|---|---|---|---|---|---|---|
| **Cond.** | Stage | viable | total count | live fraction | $\ln \mathcal{L}$ (MAP) | $\ln \hat{Z}$ |
| CS | (iv) | 0.087 | 0.039 | 0.23 | −32.3 | −43.6 to −43.8 |
| CH | (iv) | 0.059 | 0.078 | 0.12 | −25.9 | −40.5 to −41.2 |
| DS | (iv) | 0.058 | 0.080 | 0.09 | −96.3 | −113.6 to −114.3 |
| DH | (iii) | 0.073 | 0.159 | 0.07 | −51.4 | −80.7 to −81.8 |

Table 3.3: Fit at the final stage. The MAP is the best particle refined by a local optimisation (for DH the best particle); $\ln \mathcal{L}$ without the constant term; $\ln \hat{Z}$: range over the three seeds. Neither is compared across conditions, because the weights and the prior boxes differ; $\ln \hat{Z} \leq \max \ln \mathcal{L}$ holds in every run.

The fit is poorest in CS, in the live fraction (0.23). In this condition the composition

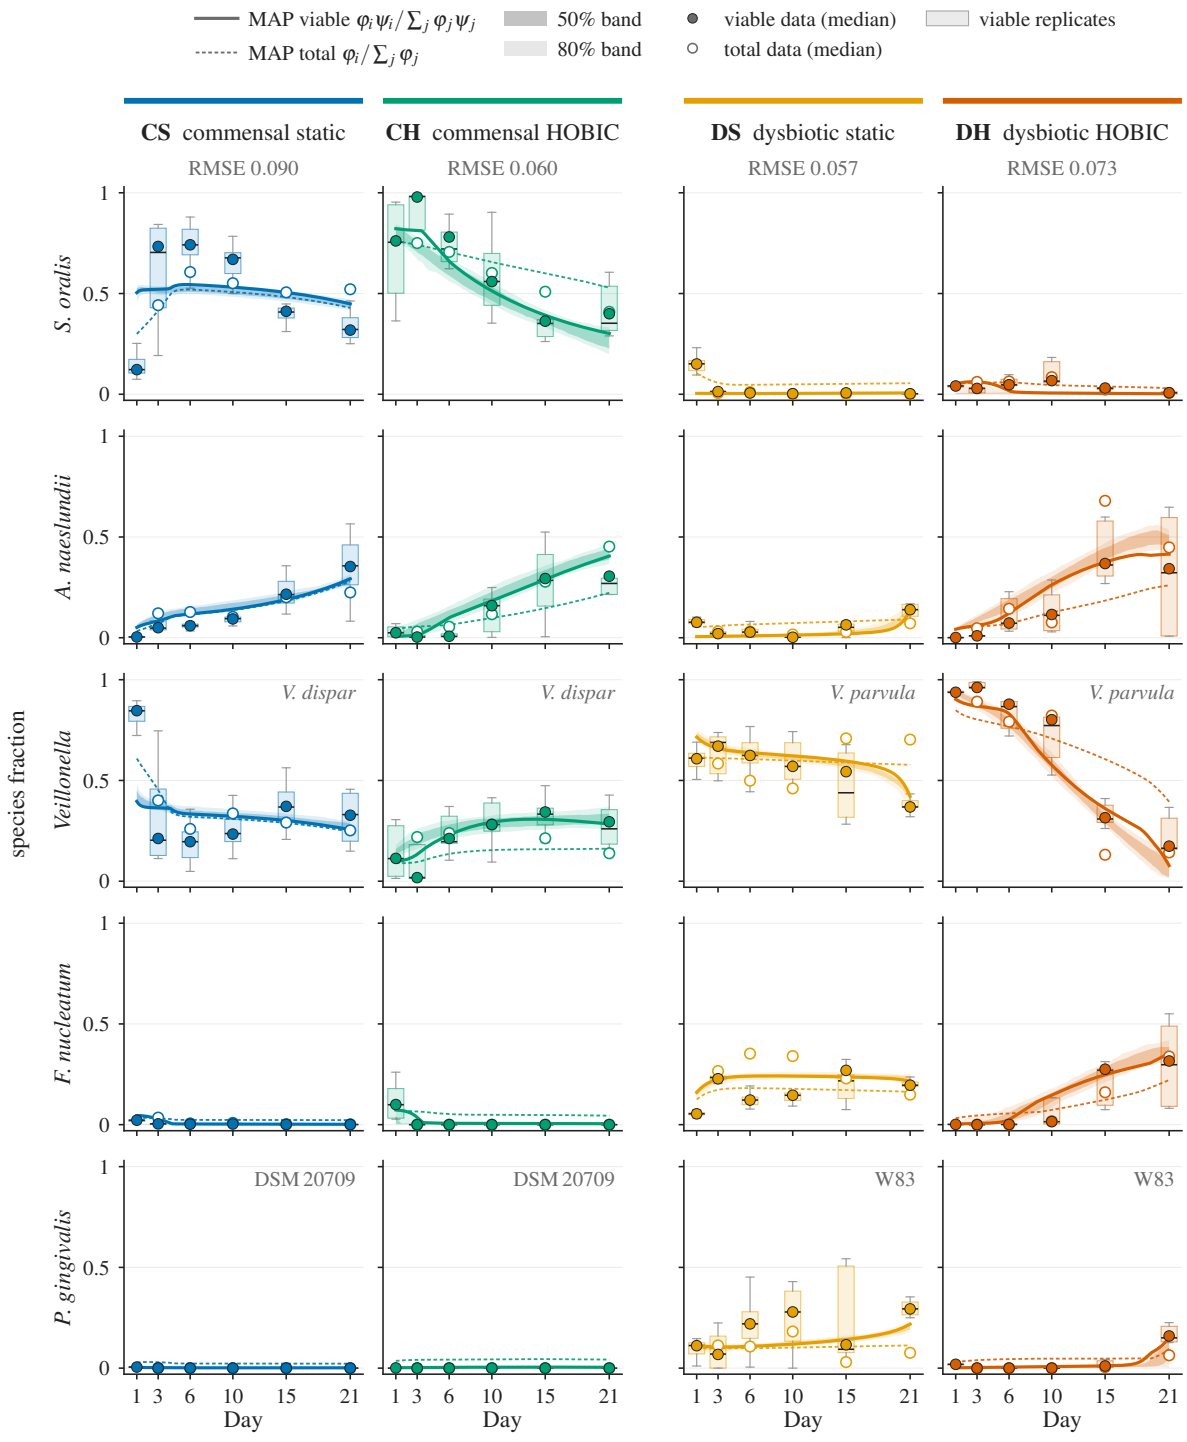



Figure 3.2: Species fractions over 21 days in the four conditions (columns) for the five taxa (rows). Lines: MAP of the final stage, viable composition $\phi_i\psi_i/\sum_j \phi_j\psi_j$ (solid) and total-count composition $\phi_i/\sum_j \phi_j$ (dotted); bands: central 50 % and 80 % posterior predictive intervals of the viable composition, pooled over three seeds; filled dots: median of the viable data; open dots: median of the total-count data; boxes: viable replicates (interquartile range). The RMSE of the viable composition is given above each column for the best particle; the refined MAP of Table 3.3 is slightly lower. DH from stage (iii).

and the live fraction cannot both be matched: raising the weight $\lambda_\psi$ of the live fraction makes the composition worse, and even a fit to the composition alone does not bring the error of the viable composition below 0.078. This is a limit of the model for CS, not of the sampler, and I report the compromise rather than re-weight the channels for this condition (Figure 3.3).

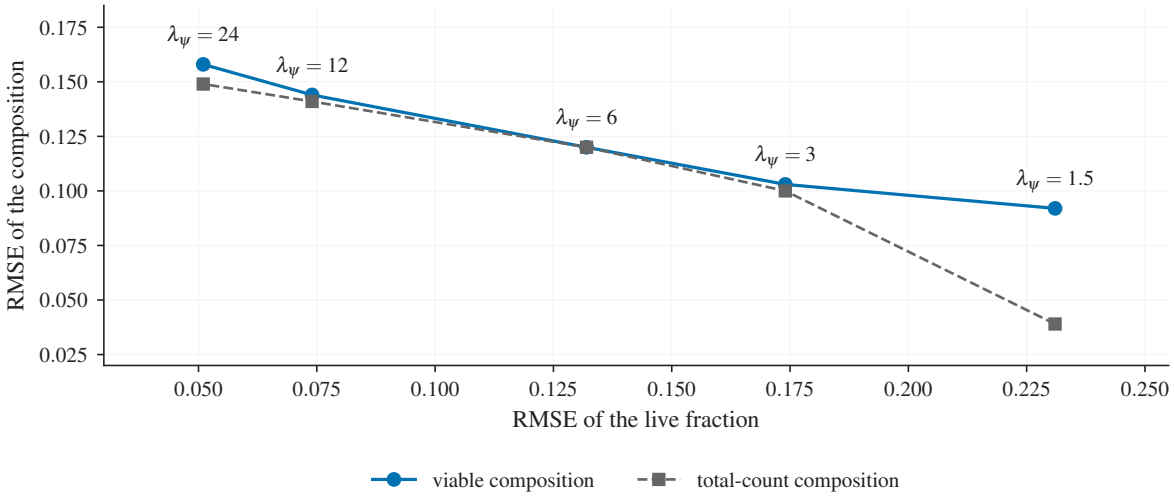



Figure 3.3: CS: error of the composition against the error of the live fraction for different weights $\lambda_\psi$ of the live fraction (labels). A better live fraction costs composition, and the composition error does not fall below about 0.08.

### 3.3.2 What the data determine

Figure 3.4 and Table 3.4 classify every entry of **A** at the final stage; Figure 3.5 shows the marginal posteriors. An entry is identified when its posterior standard deviation is below 0.8 times that of a uniform distribution on the final box; otherwise it is determined in sign only (s.o.) when its 90 % interval excludes zero, and not identified (n.i.) when it does not. The number of identified entries is 5, 6, 9 and 8 in CS, CH, DS and DH. Some entries are bounded on one side only: $a_{33}$ in CS lies below $-5.3$, and in DS $a_{44}$ and $a_{13}$ have only an upper and $a_{25}$ only a lower bound.

In the commensal conditions only a few entries are identified: five in CS ($a_{11}$, $a_{22}$, $a_{33}$, $a_{13}$, $a_{23}$) and six in CH ($a_{11}$, $a_{12}$, $a_{22}$, $a_{33}$, $a_{13}$, $a_{23}$), all among the early colonisers *So*, *An* and *Vei*; $a_{12}$ in CS is determined in sign only. Where both conditions determine the sign of an entry, it agrees: the self-interactions of *So* and *Vei* are negative ($a_{11}$, 90 % intervals $[-7.0, -1.7]$ in CS and $[-1.4, -0.4]$ in CH; $a_{33}$, $[-14.6, -5.3]$ and $[-5.8, -0.6]$), and the *So*–*Vei* coefficient is positive ($a_{13}$, $[+4.7, +11.3]$ and $[+0.3, +2.4]$), in line with the lactate cross-feeding between streptococci and *Veillonella* [10], although $a_{13}$ is an effective coefficient and not a measurement of that mechanism. Every entry involving *Fn* or *Pg* spreads over its whole box. This is expected: *Fn* and *Pg* stay below 1 % of the commensal communities from day 3 on, so the data carry little information on their interactions.

In the dysbiotic conditions, where *Fn* and *Pg* reach 10–27 % of the community, more

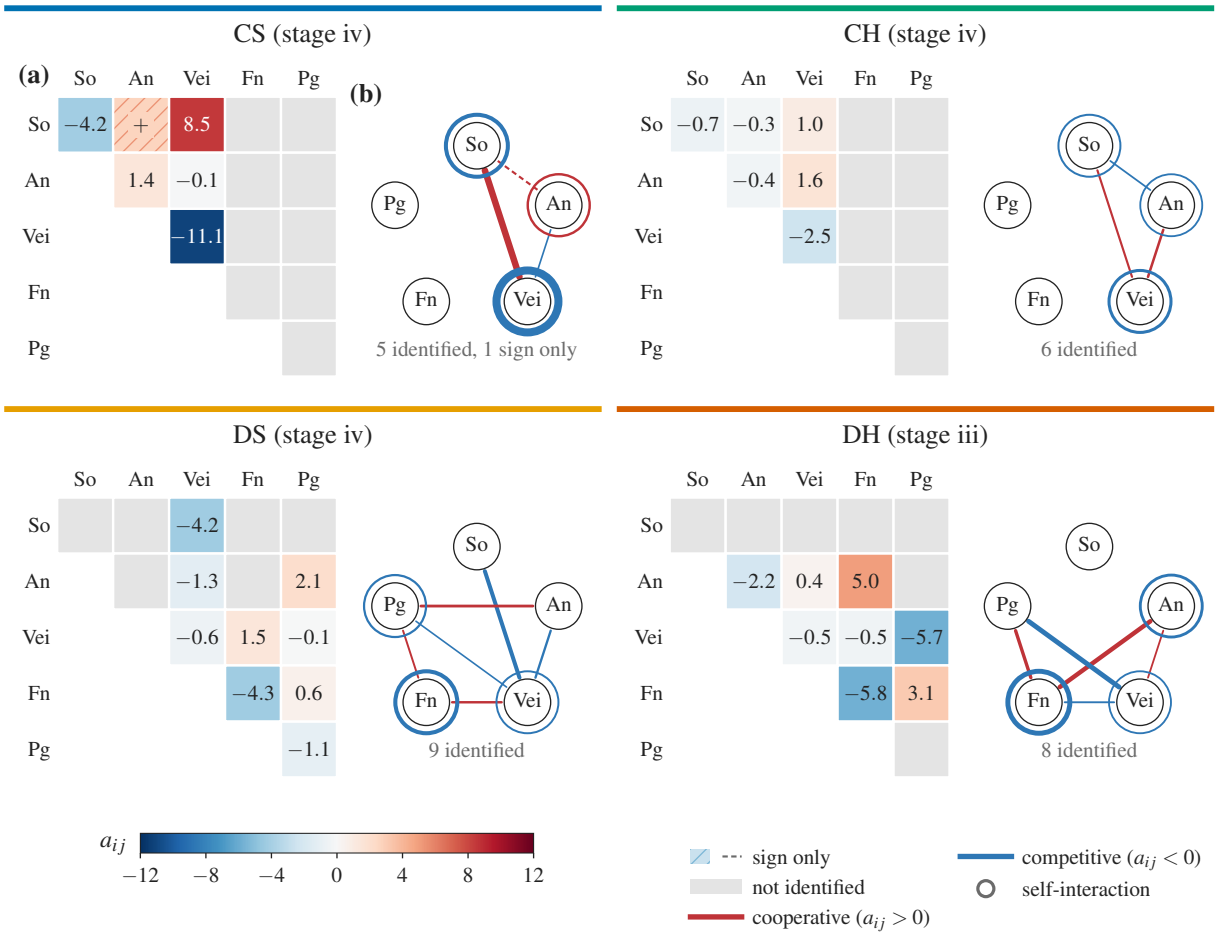



Figure 3.4: What the data determine, at the final stage with three seeds pooled; one block per condition. (a) Left in each block: upper triangle of **A**. Coloured with value: identified; colour and number give the posterior median; hatched: sign only (90 % interval excludes zero); grey: not identified. (b) Right in each block: the same entries as a network: red, $a_{ij} > 0$ (cooperative); blue, $a_{ij} < 0$ (competitive); line width proportional to the absolute median; dashed, sign only; rings, identified self-interactions. DH from stage (iii).

entries are identified, now including interactions of the late colonisers: nine in DS and eight in DH. The self-interaction of *Fn* is negative in both ($a_{44}$), and the *An*–*Fn* coefficient is positive in DH ($a_{24}$, $[+1.3, +8.8]$). The *Vei*–*Pg* coefficient $a_{35}$ is negative in DH ($[-20.9, -0.6]$) and close to zero in DS ($[-0.34, +0.24]$). The *So*–*Vei* coefficient, positive in both commensal conditions, is negative in DS ($a_{13}$, $[-4.9, -2.4]$). The commensal–dysbiotic comparison mixes the ecological state with the strain differences and the cultivation; the DS–DH contrast compares the same strains, although the two conditions also differ in the live-fraction weight and in their prior boxes.

| Entry | CS | CH | DS | DH |
|---|---|---|---|---|
| $a_{11}$ | −4.20 [−7.0, −1.7] | −0.72 [−1.4, −0.4] | n.i. | n.i. |
| $a_{12}$ | s.o. [+0.0, +1.9] | −0.31 [−0.8, +0.1] | n.i. | n.i. |
| $a_{22}$ | +1.44 [+0.5, +2.4] | −0.42 [−0.9, +0.5] | n.i. | −2.23 [−6.4, +0.2] |
| $a_{33}$ | −11.07 [−14.6, −5.3] | −2.50 [−5.8, −0.6] | −0.64 [−0.9, −0.4] | −0.46 [−0.6, −0.4] |
| $a_{34}$ | n.i. | n.i. | +1.45 [+0.9, +1.9] | −0.51 [−1.3, +0.2] |
| $a_{44}$ | n.i. | n.i. | −4.29 [−4.9, −2.8] | −5.77 [−9.6, −0.2] |
| $a_{13}$ | +8.45 [+4.7, +11.3] | +0.96 [+0.3, +2.4] | −4.22 [−4.9, −2.4] | n.i. |
| $a_{14}$ | n.i. | n.i. | n.i. | n.i. |
| $a_{23}$ | −0.12 [−1.4, +1.7] | +1.64 [+0.4, +2.7] | −1.29 [−2.0, −0.5] | +0.39 [−0.1, +1.0] |
| $a_{24}$ | n.i. | n.i. | n.i. | +4.98 [+1.3, +8.8] |
| $a_{55}$ | n.i. | n.i. | −1.08 [−3.7, +0.2] | n.i. |
| $a_{15}$ | n.i. | n.i. | n.i. | n.i. |
| $a_{25}$ | n.i. | n.i. | +2.11 [+1.1, +2.5] | n.i. |
| $a_{35}$ | n.i. | n.i. | −0.06 [−0.3, +0.2] | −5.72 [−20.9, −0.6] |
| $a_{45}$ | n.i. | n.i. | +0.63 [−0.3, +2.1] | +3.11 [−2.4, +9.2] |
| identified / s.o. / n.i. | 5/1/9 | 6/0/9 | 9/0/6 | 8/0/7 |

Table 3.4: Posterior median and 90 % interval of the identified and sign-only entries at the final stage, three seeds pooled; s.o.: sign only; n.i.: not identified. Species 1–5: *So*, *An*, *Vei*, *Fn*, *Pg*. DH from stage (iii).

The classification is a result in its own right: it states which conclusions about the interaction network the data can support, and it comes from the same runs at no additional cost. Because the boxes were narrowed in stages (ii) and (iv), the classification is made against the box of the final stage; judged against a narrowed box, an entry would look identified more easily. Figure 3.6 shows the MAP of every seed: the seeds agree in the identified entries and scatter in the others.

### 3.3.3 The *Fn*–*Pg* coefficient

The coefficient $a_{45}$ links the bridging organism *Fn* to the pathogen *Pg*. Comparing the full model with a model in which $a_{45} = 0$ gives $\ln B = -0.06$ (CS), $+0.03$ (CH), $+7.5$ (DS) and $+2.1$ (DH). In the commensal conditions the data cannot tell the two models apart; in the dysbiotic conditions they favour a non-zero $a_{45}$. The uniform prior penalises the full model by the log-width of the $a_{45}$ box, so $\ln B$ is read only within a condition. At the final stage $a_{45}$ is identified in both dysbiotic conditions, but its 90 % intervals include zero ($[-0.3, +2.1]$ in DS, $[-2.4, +9.2]$ in DH): the coefficient is constrained by the data, but its sign is not determined.

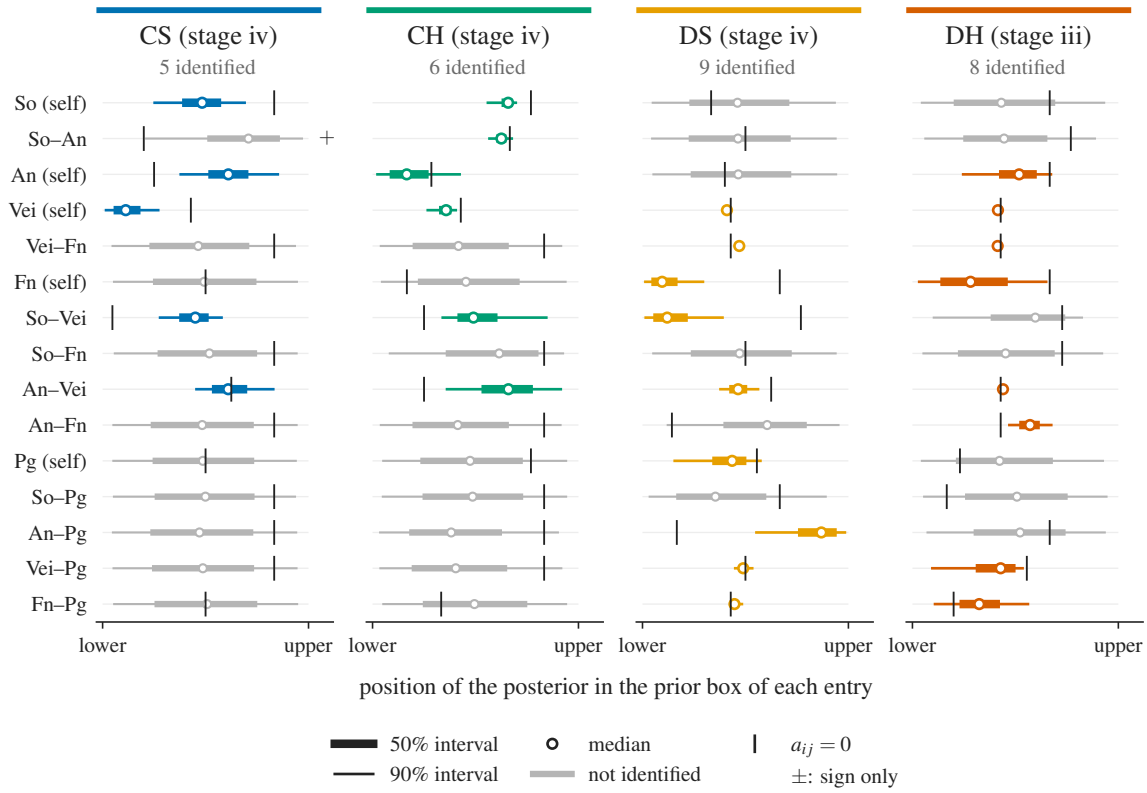



Figure 3.5: Marginal posteriors of the 15 entries at the final stage, three seeds pooled, drawn by their position in the prior box (thick: 50 %, thin: 90 % interval; dot: median; tick: $a_{ij} = 0$; grey: not identified). DH from stage (iii).

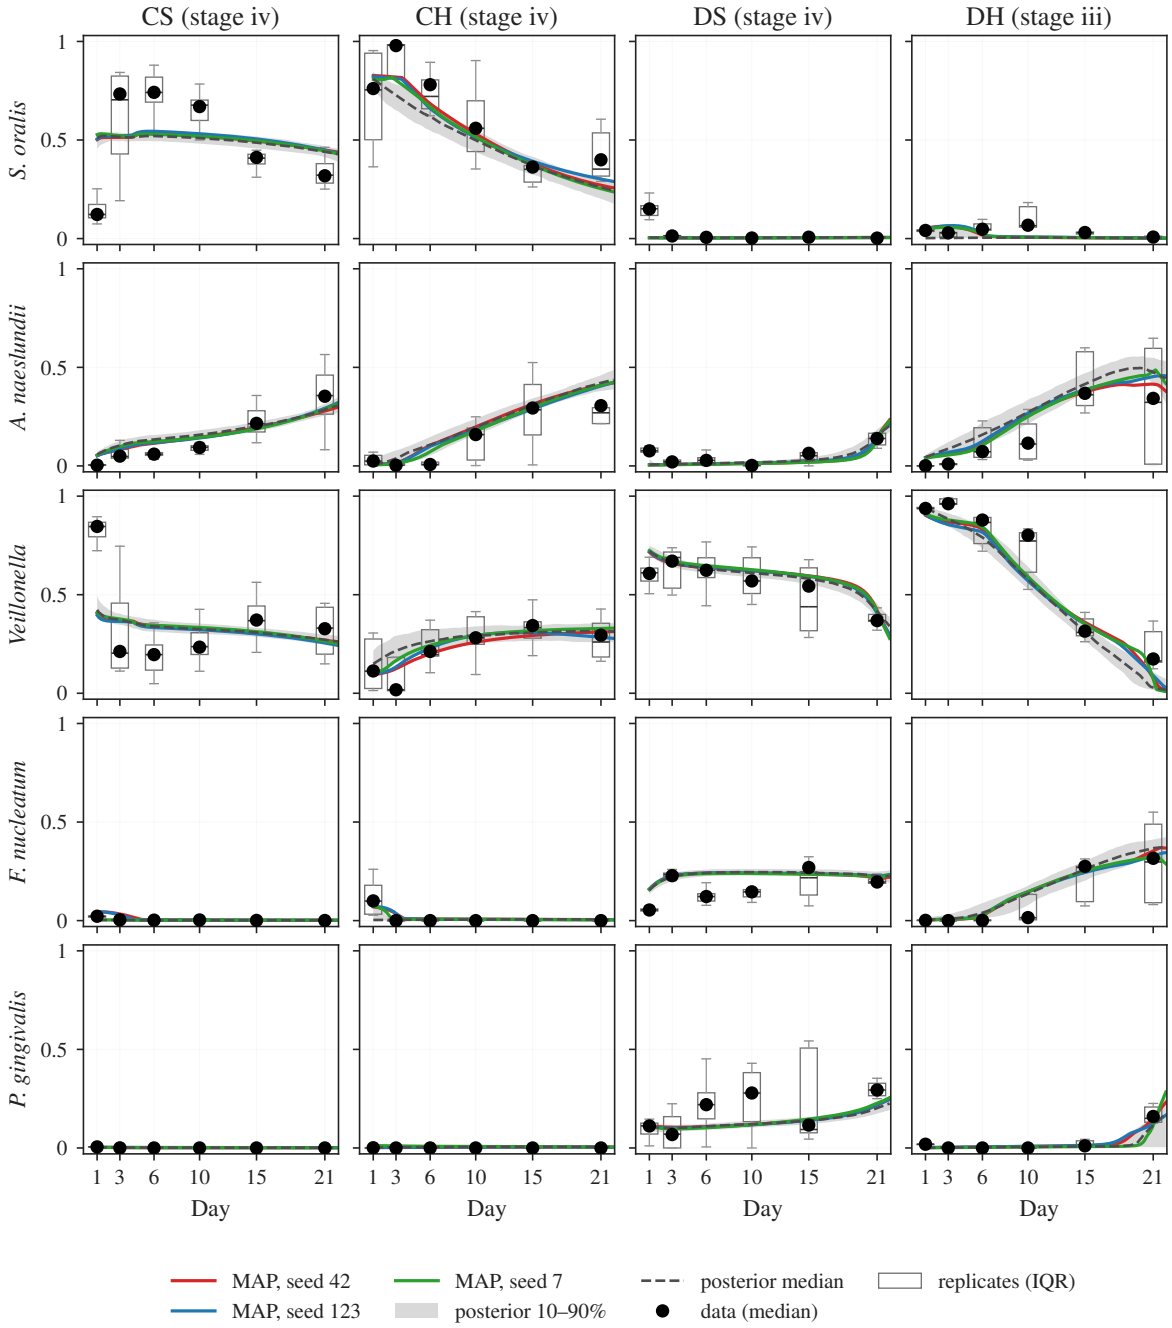



Figure 3.6: Viable species fractions computed with the best particle of each of the three seeds at the final stage (coloured lines), the 10–90 % band (grey) and median (dashed) of the posterior prediction pooled over the seeds, and the measured viable composition (dots: median; boxes: interquartile range of the replicates; day 1 is the initial condition). The maximum log-likelihoods of the three seeds lie within 0.6 of each other (−32.9 to −33.1 in CS, −26.5 to −27.1 in CH, −96.8 to −96.9 in DS, −51.4 to −51.8 in DH), and their composition RMSEs are 0.090–0.093, 0.060–0.066, 0.057 and 0.073–0.076. DH from stage (iii).

### 3.3.4 Recovery test

To test the classification, I generated synthetic data with known coefficients at the measured time points and repeated the inference. The classification of the 15 entries as identified or not was recovered for 14 (CS), 15 (CH), 14 (DS) and 15 (DH) entries. The intervals are less reliable than the classification: in CH the true value lies inside the 90 % interval for only 2 of the 6 identified entries. The posterior intervals of this chapter are therefore read as a lower bound on the uncertainty (Figure 3.7).

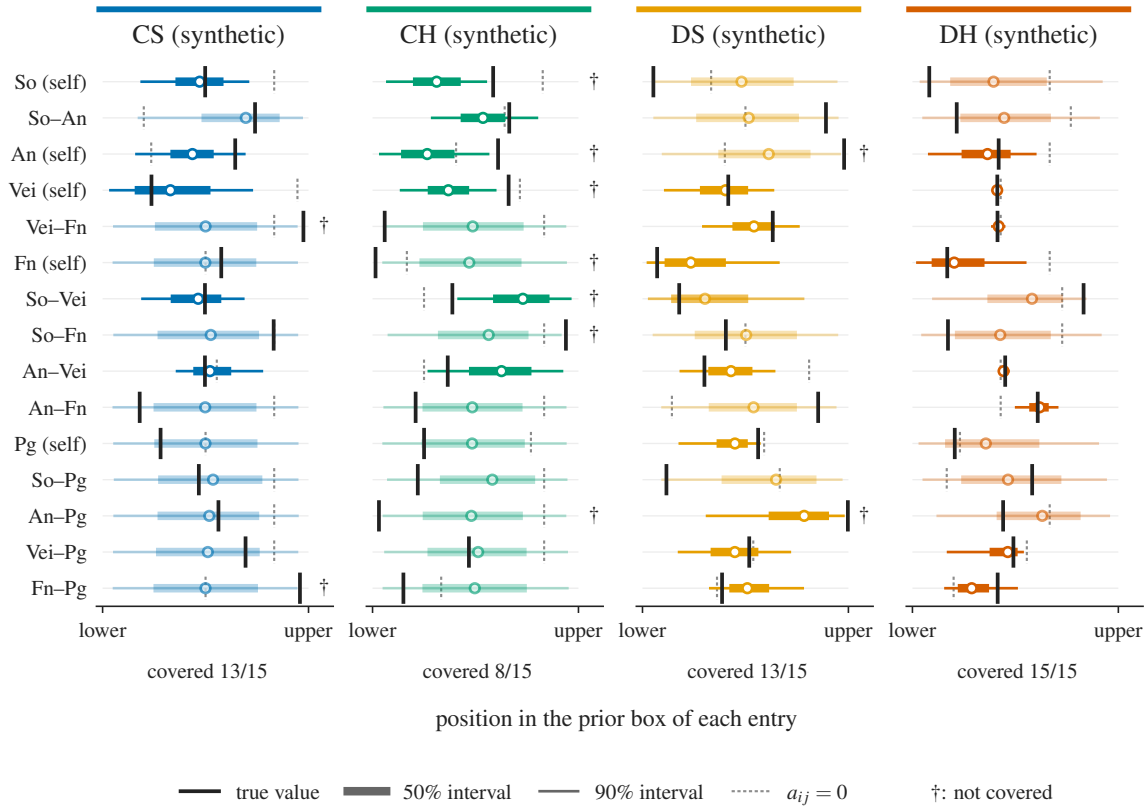



Figure 3.7: Recovery test: posterior of each entry for synthetic data generated with known coefficients (vertical bar: true value; thick and thin: 50 % and 90 % interval), drawn by the position in the prior box. Below each panel: number of entries whose true value lies inside the 90 % interval.

## 3.4 Checks Against Data Not Used in the Inference

The pH measured in the flow reactor was not used in the inference (Figure 3.8b,c). A linear regression of the measured pH on the measured species fractions (intercept and four fractions, *Vei* as reference) is fitted once on the measured data, the continuous pH records of CH and DH (mean of five reactors, about 14,000 values per condition) with the composition interpolated between the sampling days ($R^2 = 0.88$), and then applied, unchanged, to the posterior predictive composition, so the check tests the predicted composition, not a model of pH. In DH the pH predicted in this way follows the measured rise from 6.4 to 7.0 ($R^2 = 0.71$, RMSE 0.097; 85 % of the measured values lie inside the

90 % band). In CH it matches the level of the measured pH (RMSE 0.082) but not its variation ($R^2 < 0$; 44 % inside the band).

The calibrated model can also be used in silico. Removing *Fn* from the dysbiotic flow-reactor community reduces the late increase of *Pg* to about a quarter: the ratio of the *Pg* fraction on day 21 to day 15 falls from about 12 to 3.0 (Figure 3.8a). Setting only $a_{45} = 0$ removes most of the increase, so the prediction rests mainly on the *Fn*–*Pg* coefficient, and it can be tested directly by a co-culture without *Fn*. The size of the increase itself is not determined by the data: the MAPs of the three seeds give ratios of 9.6 to 18.0 (measured 14.9), and the 90 % interval spans 0.6 to 32. Under static cultivation the model gives a smaller late increase than measured (1.4–1.5 against 2.5); without *Fn* the ratio is 1.0, and $a_{45} = 0$ leaves it unchanged.

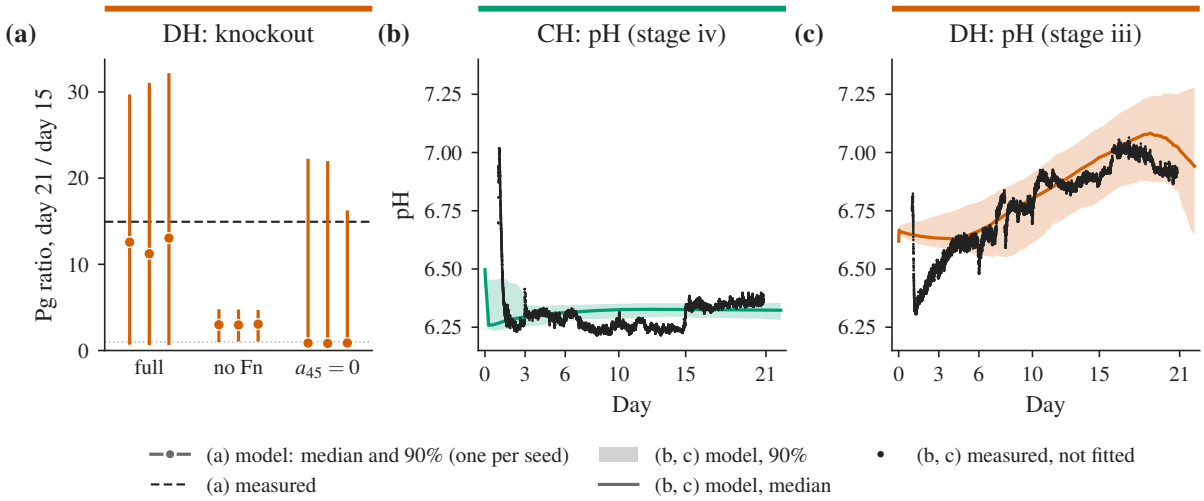



Figure 3.8: Checks against data and predictions not used in the inference. (a) DH: ratio of the *Pg* fraction on day 21 to day 15 for the calibrated model, with *Fn* removed, and with $a_{45} = 0$ (posterior median and 90 % interval, one bar per seed; dashed: measured). (b,c) pH predicted from the posterior composition through a regression fitted once on the measured pH and composition (band: central 90 % interval), against the measured pH. DH from stage (iii).

## 3.5 Discussion

**What the calibration supports.** The data determine a small part of the matrix: in the commensal conditions the interactions among the early colonisers, and in the dysbiotic conditions also some interactions of *Fn* and *Pg*. The signs that are determined agree with the documented pathways where both exist, which is consistency, not proof of a mechanism. The repeated stages with three seeds and the acceptance criteria were necessary: several runs that looked converged did not meet them.

**Limitations.** The likelihood treats the five fractions as independent although they sum to one, so the posterior intervals are too narrow (Section 3.3.4). The community live

fraction does not determine the species-specific viabilities $\psi_i$ (in the model they span 0.03–0.96), so the living fractions of individual species are not predictions of the calibrated model. The interaction coefficients are effective quantities of this model and data set, and the recovery test shows that their intervals understate the uncertainty. The commensal–dysbiotic comparison is confounded by the strain differences. In CS the model cannot match the composition and the live fraction at the same time. In DH the final stage split across seeds into different posterior modes, so DH is reported from stage (iii), and the size of the late *Pg* increase is not determined by the data. The calibration covers a material point; the spatial structure and the mechanics are not part of the inference. Because the likelihood uses fractions only, the absolute amount of biomass is a prediction of the model, and its posterior spread has to be carried into the coupling with the finite element model of Chapter 4. The five-species runs of Chapter 4 use the final CH MAP of this chapter.

### 3.6 From In-Vitro to In-Vivo Data: a Metabolic Sign Prior

The calibration above rests on rich in-vitro data: five species, six time points, four controlled conditions. Clinical data are much sparser. This section shows, in condensed form, how the same type of model can still be identified there when the signs of the interactions are fixed beforehand from metabolic models. The work was done during an internship at NIFE together with S. P. Szafrański and is summarised here because it completes the calibration side of the thesis; the full analysis is available as an internal report.

**Data.** Dieckow et al. [53] characterised early biofilm formation on implant abutments in 12 patients. The analysis uses 10 of them, each sampled at three weekly time points. The 16S rRNA amplicon reads were aggregated into 10 class-level guilds and normalised to the simplex, $\sum_i \phi_i = 1$. With 10 guilds and three time points, the first of which is the initial condition, there are 20 observations per patient against up to 55 entries of a symmetric interaction matrix, so the inverse problem cannot be solved without additional information.

**Sign prior.** The prior of Section 2.7 is assembled in three layers: experimentally documented production and use of metabolites from eHOMD [54] and Szafrański et al. [55] (34 constrained guild pairs); parsimonious FBA of one AGORA2 model per guild [31] (35 pairs); and community FBA with MICOM [30] (72 pairs). The directed signals are symmetrised for the symmetric model, and the penalty acts only on coefficients of the wrong sign.

**Model and test.** The replicator form of Section 2.4 is fitted with one interaction matrix $\mathbf{A}$ shared by all patients and a growth vector $\mathbf{b}^{(p)}$ per patient. It is tested by leave-one-patient-out cross-validation: $\mathbf{A}$ is fitted on nine patients and frozen, the held-out patient's $\mathbf{b}^{(p)}$ is fitted from the first week only, and the second and third weeks are predicted.

Table 3.5 lists the prediction errors, and Figures 3.9 and 3.10 show the predictions of the best model.

| model | prior | sign agreement | LOO-RMSE |
|---|---|---|---|
| replicator, symmetric $\mathbf{A}$ | none | – | 0.0595 |
| replicator, symmetric $\mathbf{A}$ | eHOMD + pFBA | 94% | 0.0516 |
| replicator, symmetric $\mathbf{A}$ | + MICOM | 100% | 0.0502 |
| gLV, asymmetric | none | – | 0.0588 |
| gLV, asymmetric | eHOMD + pFBA | 97% | 0.0490 |
| Bayesian gLV (MDSINE2 [56]) | sparsity | – | 0.0552 |

Table 3.5: Leave-one-patient-out prediction of the in-vivo guild compositions (10 patients of Dieckow et al.). Sign agreement: share of the constrained pairs whose fitted sign matches the prior. The persistence null model has a Bray–Curtis dissimilarity of 0.281; the best model reaches 0.147.

**Results.**

- The sign prior improves the symmetric model step by step, from 0.0595 without prior to 0.0502 with all three layers. The asymmetric gLV with the first two layers is slightly better (0.0490); its directed coefficients add freedom that the symmetric model does not have. The Bayesian gLV collapses to $\mathbf{A} \approx 0$ with three time points.
- Only the sign carries over from the metabolic models. A prior that ties $A_{ij}$ to the magnitude of the predicted fluxes recovers the correct sign for only 4 to 11 of 70 pairs. Fitted without any prior, the symmetric model still recovers 11 of the 14 cross-feeding signs predicted by AGORA2 (78.6 %, against 37.7 % under a permutation null, $p = 4 \times 10^{-4}$); the asymmetric gLV shows no such agreement ($p = 0.96$).

**Limits.** With 10 patients the gain of the community-FBA layer over the first two is only marginally significant ($p \approx 0.07$). The symmetric matrix cannot represent directed effects, which is where the asymmetric gLV gains its edge. For the rest of this thesis the result that matters is a narrower one: the signs of the interaction matrix are the part of the model that is supported by independent evidence, in vitro and in vivo.

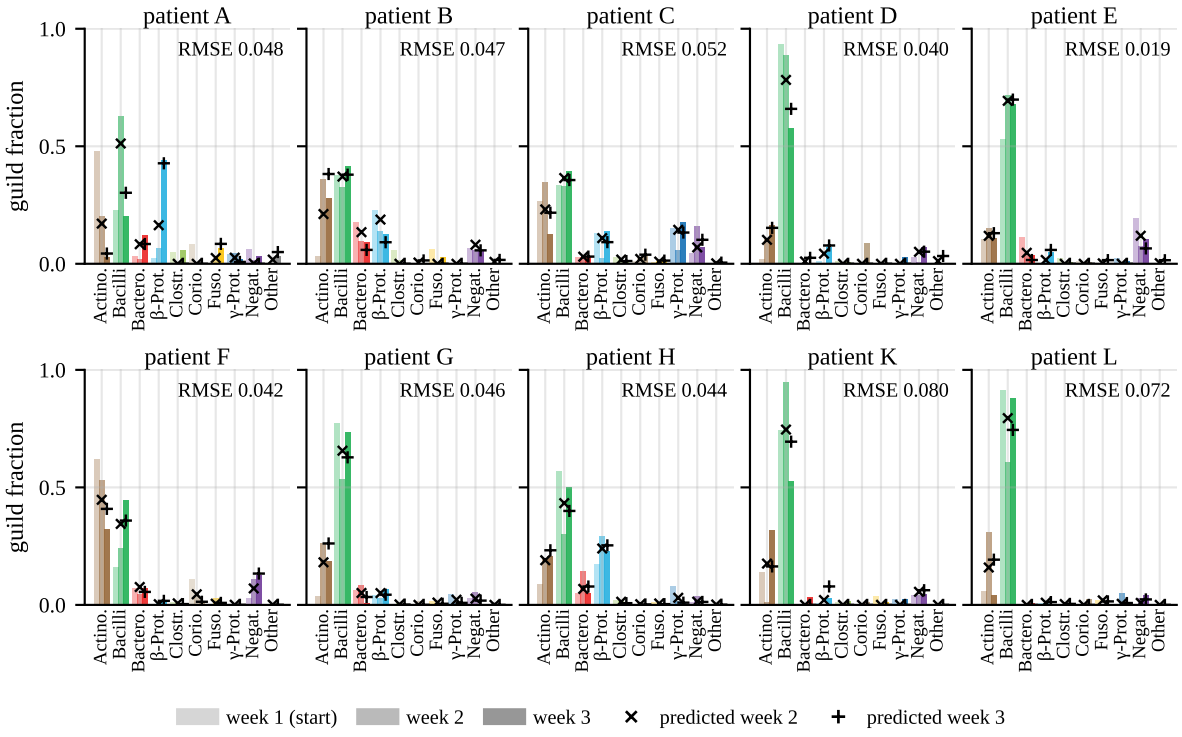



Figure 3.9: Leave-one-patient-out prediction for the ten patients with the best model of Table 3.5 (gLV with the eHOMD and pFBA sign prior). Bars: observed guild fractions in weeks 1 to 3 (light to dark); markers: weeks 2 and 3 predicted with **A** fitted on the other nine patients and the patient's growth vector fitted on week 1 only. RMSE per patient.

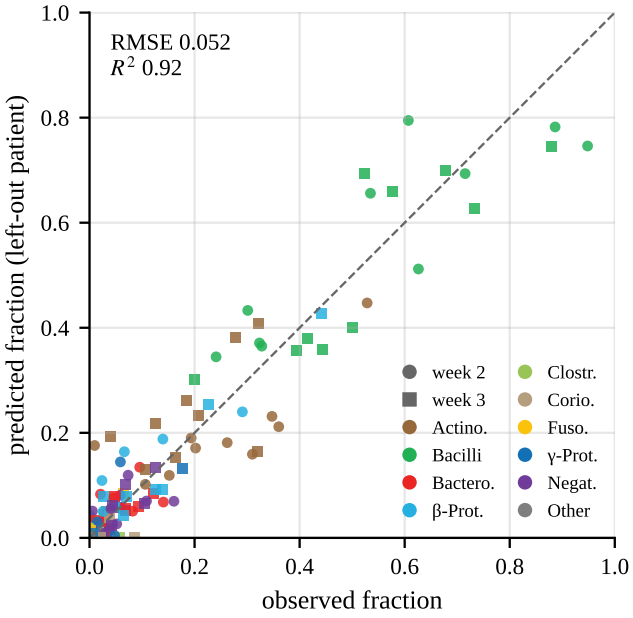



Figure 3.10: Predicted against observed guild fractions of Figure 3.9, all patients, guilds and both predicted weeks (200 values). The pooled RMSE (0.052) is slightly above the mean of the per-patient values (0.049).

# 4 Coupling biofilm growth into an existing FEM element

## 4.1 Scope and contribution

This chapter brings the point model of Chapter 3 into the biofilm element developed at IKM for the partner project, which solves the field model of Klempt et al. [32] (Section 2.2) in ANSYS. It covers one and two species, for which the papers give numbers to check against, and contains the second and third contributions of the thesis (Section 1.3):

- a growth law, $\mathbf{F} = \mathbf{F}_e\mathbf{F}_g$ with $\mathbf{F}_g = \alpha\mathbf{I}$, implemented as an ANSYS user material and verified against closed forms (§4.2–4.4), and coupled to the element's biofilm field through the growth equation at every Gauss point (§4.5);
- the point model of Klempt et al. [24] (Section 2.3), unchanged, at every Gauss point: the nutrient and an antibiotic come from fields of the element, and its living biomass sets their consumption (§4.6).

The same coupling also carries the five-species model calibrated in Chapter 3; this is shown once, as a link between the two chapters (§4.7.2), without a published case to check against.

## 4.2 The constitutive model

Growth enters multiplicatively, $\mathbf{F} = \mathbf{F}_e\mathbf{F}_v\mathbf{F}_g$ with $\mathbf{F}_g = \alpha\mathbf{I}$ and $\alpha(0) = 1$, as in Klempt et al. [32]; $\alpha - 1$ is the growth, and $\alpha = 1$ means no growth. The elastic response is compressible Mooney–Rivlin, reducing to neo-Hookean at $C_{01} = 0$. A viscous branch, a deviatoric Newtonian dashpot carrying $\mathbf{F}_v$, is implemented but switched off ($\eta = 0$) in every result of this chapter, as in the paper.

Written out in the order the implementation evaluates it, a step takes the total deformation gradient $\mathbf{F}$ and the viscous state $\mathbf{F}_v^n$ and returns the Cauchy stress and $\mathbf{F}_v^{n+1}$:

1. the mechanical part removes the growth, $\mathbf{F}_{\text{mech}} = \mathbf{F}\,\mathbf{F}_g^{-1}$, and a trial elastic gradient follows from the viscous state at the start of the step, $\mathbf{F}_e^{\text{tr}} = \mathbf{F}_{\text{mech}}(\mathbf{F}_v^n)^{-1}$;
2. with $\mathbf{b}_e = \mathbf{F}_e\mathbf{F}_e^{\mathsf{T}}$ and $J_e = \det\mathbf{F}_e$, the deviatoric Kirchhoff stress follows from $W = C_{10}(\bar{I}_1 - 3) + C_{01}(\bar{I}_2 - 3) + \frac{1}{D_1}(J_e - 1)^2$, with the isochoric invariants $\bar{I}_1$, $\bar{I}_2$ of $\mathbf{b}_e$;
3. the viscous state advances by one step of the deviatoric flow rule,

$$\mathbf{F}_v^{n+1} = \Big(\mathbf{I} + \frac{\Delta t}{2\,\eta\,J_e}\,\boldsymbol{\tau}_{\text{dev}}\Big)\mathbf{F}_v^n, \tag{4.1}$$

   with $\boldsymbol{\tau}_{\text{dev}}$ taken at the trial state;

4. the stress is recomputed at $\mathbf{F}_v^{n+1}$, the volumetric term $\frac{2}{D_1}(J_e - 1)$ is added, and the result is returned in the solver's Voigt ordering.

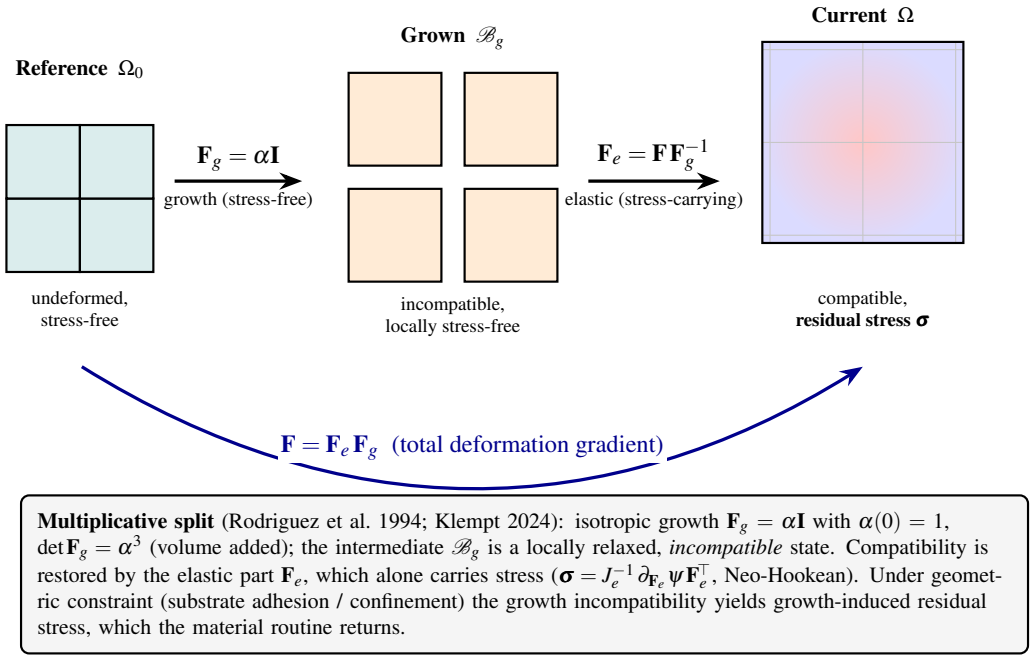



Figure 4.1: The configurations the decomposition introduces. Growth carries the reference state to an intermediate one that is stress free but generally incompatible; the elastic part restores compatibility, and this is where the residual stress comes from.

A body that can grow freely therefore stays stress free; stress appears only where growth is constrained, by boundary conditions or by neighbouring material that grows less.

**Stiffness.** Klempt et al. weight the elastic energy with $\phi^2$, so that the void, $\phi = 0$, has no stiffness, and give $\mu = 3.3557$ Pa ($E = 10$ Pa, $\nu = 0.49$) in their Table 2. The routine supports this form,

$$E(\phi) = (\phi^2 + f)\,E_{\text{bio}}, \qquad \nu = \nu_{\text{bio}}, \tag{4.2}$$

where $f$ is a small floor that keeps the void solvable; it is not in the paper, whose void has no stiffness. It is tested to reproduce the plain law fed the same $E$ at every $\phi$ and to scale the stress by $\phi^2$. The paper's material is incompressible, with $\det\mathbf{F}_e = 1$ enforced by a Lagrange multiplier, and $\nu = 0.49$ enters there only through $\mu$; here the constraint is approximated by $\nu = 0.49$. The element, SOLID185 in its default $\bar{\mathbf{B}}$ formulation, integrates over the $2 \times 2 \times 2$ Gauss points of each element, where it also stores its fields, and uses one dilatation per element, the same idea as the H1P0 element of the paper. A Python solution of the same problem shows that with this formulation the mean stress changes by less than 10 % between $\nu = 0.49$ and 0.499, while full integration would overestimate it several times (§4.7).

## 4.3 Implementation

The law is implemented as an ANSYS `USERMAT`.[1] It is delivered to the partner framework as a routine with the same argument shape as the framework's own elastic law: per-phase $(E, \nu)$ blended by the local biofilm fraction, returning Cauchy stress and consistent tangent. The delivered routine is an adapter around the verified core. This was tested: fed $(E, \nu)$, it reproduces the core fed the $(C_{10}, C_{01}, D_1)$ those map to, at zero tolerance. It uses no solver includes and no common blocks, so it does not depend on the ANSYS release.

The consistent tangent is obtained by perturbing $\mathbf{F}$ rather than in closed form. A tangent that is slightly wrong does not give a wrong answer but a Newton iteration that converges slowly or not at all, which is hard to diagnose inside someone else's framework. I therefore compared it with forward-mode automatic differentiation over the range the routine is expected to see: stiffness over three decades, Poisson ratios up to 0.49, growth up to $\alpha - 1 = 0.35$, both material paths, elastic and viscous. Over 648 combinations the relative difference has median $1.2 \times 10^{-7}$ and worst case $1.1 \times 10^{-6}$, with no part of the range degrading.

## 4.4 Verification of the growth law

The checks of this section are verification: they test whether the implementation solves the equations it states. Validation against a measured stress is not attempted (Section 4.4.3).

### 4.4.1 Growth kinematics against closed forms

Two growth cases have closed forms. Traction-free isotropic growth expands the body to $\mathbf{F} = \alpha\mathbf{I}$ with zero stress. Fully constrained growth gives an isotropic elastic deformation, so the deviatoric stress vanishes and only

$$\boldsymbol{\sigma} = \frac{2}{D_1}\,(J_e - 1)\,\mathbf{I}, \qquad J_e = \alpha^{-3} \tag{4.3}$$

remains, independently of the shear constants and of the viscosity.

In ANSYS 2022 R2, one SOLID185 element at $\alpha = 1.05$, with $C_{10} = 2 \times 10^{-4}$ MPa, $C_{01} = 0$ and $D_1 = 5 \times 10^{3}$ MPa$^{-1}$ (shear and bulk modulus both $4 \times 10^{-4}$ MPa, $\nu = 0.125$; this deck sets no unit system, so stresses come out in the unit of $C_{10}$, read here as MPa as in the framework's decks), returns a largest stress component of $1.9 \times 10^{-11}$ MPa under free growth, seven decades below the constrained answer. Under full constraint it returns $\sigma_{xx} = \sigma_{yy} = \sigma_{zz} = -1.0193 \times 10^{-4}$ MPa, with shear components at machine noise. The free case is needed as well: full constraint can hide a sign error in $\mathbf{F}_e = \mathbf{F}\mathbf{F}_g^{-1}$, because the element cannot move, and only the free case exposes it.

The constrained value is not equation (4.3) alone. It equals that term plus a spherical term that I predicted in closed form from the implementation (§4.4.3), to every digit ANSYS prints, with the extra term making up 47 % of the reported stress for this material ($\nu = 0.125$) (Figure 4.2).

[1] `ansys_usermat/usermat_biofilm.f` in the accompanying repository.

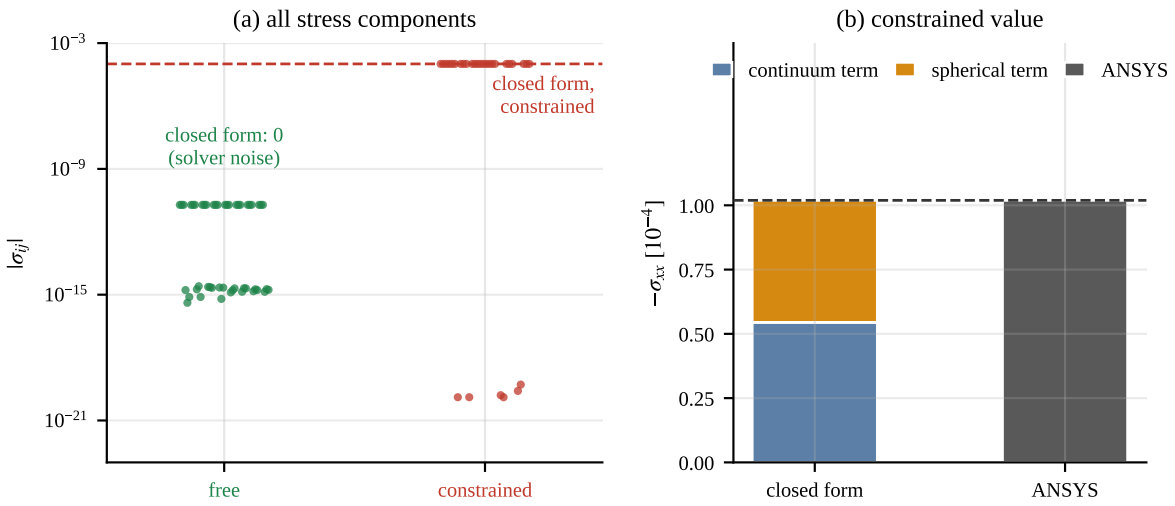



Figure 4.2: One SOLID185 element, $\alpha = 1.05$, the same material, differing only in the boundary conditions. (a) Every stress component of both solves (8 nodes, 6 components each); the closed form is zero for the free case, so the values there are solver noise, and the 16 constrained components that are exactly zero cannot be shown on the log axis. (b) The constrained value decomposed into the continuum term and the spherical term of §4.4.3: their sum, $-1.019276 \times 10^{-4}$, agrees with the solver's $-1.0193 \times 10^{-4}$ to every printed digit; the spherical term is 47 % of it and does not enter the von Mises stress.

### 4.4.2 The delivered routine on a larger mesh

A two-layer curved shell of 12 240 elements, a non-growing substrate under a growth layer, was solved twice in ANSYS: once with the verified core and once with the delivered routine. The von Mises fields agree to every digit reported (minimum $4.3523 \times 10^{-9}$, maximum $1.1862 \times 10^{-5}$, mean $9.1443 \times 10^{-6}$, all in MPa), with no solver errors. This is a consistency check between two builds, not a comparison with a closed form.

The same model showed a meshing error that I corrected. The two layers had been meshed separately and joined by merging coincident nodes, and on the curved sweeps only 63 of 5 673 interface nodes coincided, three axial lines. The growth layer was held along those lines and free between them; the "two-lobe" bulge first read as a buckling mode was the layer lifting between them. With one shared interface mesh the bulge is near uniform and converges at close to second order: the $\theta$-profile error against the finest mesh falls from 2.7 % to 0.58 % over 2.4k, 19k and 150k elements, each step halving the element size, an observed order of 1.9, and every growth value up to $\alpha - 1 = 0.2$ converges (Figure 4.3).

The finite-difference tangent holds up inside the solver as well (Figure 4.4): every substep converges in one to four equilibrium iterations, and the automatic time stepping enlarges the increment at every opportunity, from 0.5 to 1.6875 of a pseudo-time that runs to 5 (the material has no viscosity here, so time has no physical unit), without a single cut-back.

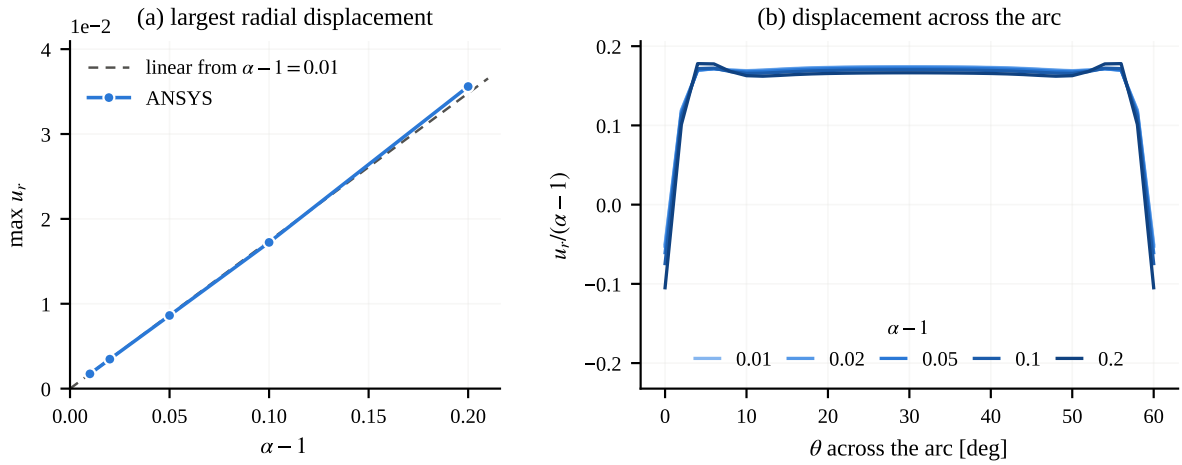



Figure 4.3: The bonded two-layer shell (2.4k elements) under prescribed growth $\alpha-1=0.01$ to 0.2; all runs reach the end time. (a) Largest radial displacement against $\alpha-1$, with the straight line through the $\alpha-1=0.01$ run. (b) The radial displacement across the arc divided by $\alpha-1$: in the middle of the arc the curves differ from the $\alpha-1=0.01$ curve by 1 % at $\alpha-1=0.05$ and 4 % at 0.2; the larger differences are at the ends of the arc.

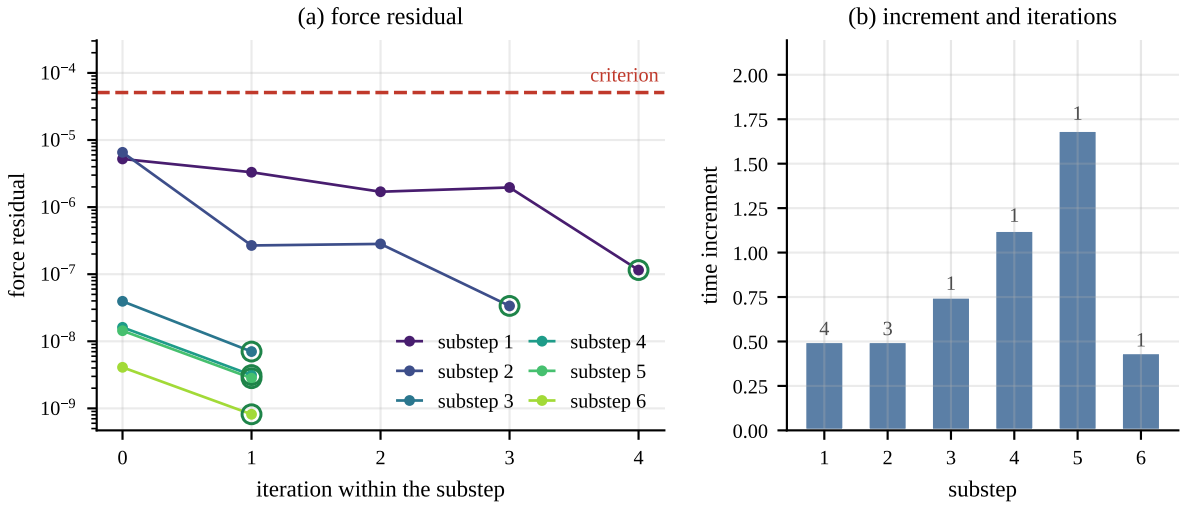



Figure 4.4: Convergence of the 12 240-element solve, read from the solver's listing: the load step finished in 6 substeps. (a) Force residual against the equilibrium iteration, one curve per substep (circle: converged), with the ANSYS criterion dashed. (b) The time increment of each substep and, above the bars, the iterations it needed. The automatic time stepping only enlarged the increment; the last one is short because the load step ends there.

### 4.4.3 What these checks establish, and what they do not

The isochoric split in the implementation applies $J^{-2/3}$ to the subtracted trace but not to the tensor beside it. The coded and the correct forms agree only at $J = 1$, and growth moves $J_e$ away from 1 by construction. The difference is purely spherical for any deformation, so it is a pressure error: the deviatoric stress, and with it the von Mises stress reported in this work, is unaffected at a given deformation. It is the spherical term of Figure 4.2.

Two of the usual checks cannot see such an error. The free-growth case lands exactly on $J_e = 1$, where both forms agree, and reference values generated by calling the implementation record its behaviour rather than test it. Only the comparison with an independently derived closed form finds it, which is why equation (4.3) is derived from the continuum statement and not from the code. A wrong pressure can still reach the von Mises stress indirectly, through the displacement field of an equilibrium solve; this route is not measured here. It shrinks as $\nu \to 0.5$: at the paper's $\nu = 0.49$ the extra term is 1.3 % of the constrained pressure, against 31 % at $\nu = 0.3$.

## 4.5 Coupling to the element's biofilm field

### 4.5.1 The framework and the growth equation

The partner framework solves the mechanics in ANSYS and its transport fields in its own routines, alternating substep by substep (Figure 4.6). The biofilm field follows Klempt et al. [32], Eq. 34 and 36:

$$\dot{\phi} = \beta\,\Delta\phi + k_\alpha\,\alpha - r\,\frac{c}{k+c}\,\nabla\phi\cdot\frac{\nabla c}{\|\nabla c\|}, \qquad \dot{\alpha} = k_\alpha\,\phi, \tag{4.4}$$

with diffusion, a local source, and a front term $-r\frac{c}{k+c}\,\mathbf{n}_c\cdot\nabla\phi_{3D}$ that moves the biofilm boundary up the nutrient gradient. The element computes $\phi$ at its Gauss points; I leave it unchanged. Its Laplacian and the gradients of $\phi$ and $c$ are approximated from the values at the neighbouring Gauss points, by a second-order Taylor expansion fitted in the weighted least-squares sense, the Neighbored Element Method [57, 58]. The field is updated explicitly, which limits the time step. Rudolf et al. [58] give $\Delta t \le h^2/(2\beta)$ for the element size $h$, which is the limit of the three-point stencil in one dimension; the seven-point stencil in three dimensions has $\lambda = \beta\Delta t/h^2 \le 1/6$. A Bloch analysis of the NEM stencil on the lattice of the Gauss points (Appendix D) gives the limit of this element: 0.18 for the unweighted fit, because the lattice is not uniform, and lower on coarse meshes, because the width $\beta^* = 0.2$ mm of the Gaussian weight is fixed in millimetres. On $16^3$ and $24^3$ the limit also depends on which points of the last, equidistant shell enter the fit of 30 neighbours, and lies between 0.122 and 0.140 on $16^3$ and between 0.122 and 0.162 on $24^3$; on $8^3$ it is 0.062. Runs to $T^* = 5$ confirm this: on $8^3$ they stay smooth at $\lambda = 0.048$ and stop at 0.080, on $16^3$ at 0.136 and 0.144, and on $24^3$ at 0.130 and 0.158 (Figure 4.5). Runs to $T^* = 1.1$ are too short to show an instability near the limit. The results of this

chapter use $\lambda \leq 0.04$ on $8^3$ and $\lambda \leq 0.072$ on $24^3$, below the band, and $\lambda \leq 0.128$ on $16^3$, inside the band but below 0.136, where the runs to $T^* = 5$ on $16^3$ still stay smooth. The time-step series below has two further cases on $24^3$: at $\Delta t = 0.05$ ($\lambda = 0.144$, inside the band) the seed growth follows the first-order trend of the other steps, and at $\Delta t = 0.1$ ($\lambda = 0.288$) the run gave no result, so the $24^3$ series starts at $\Delta t = 0.05$.

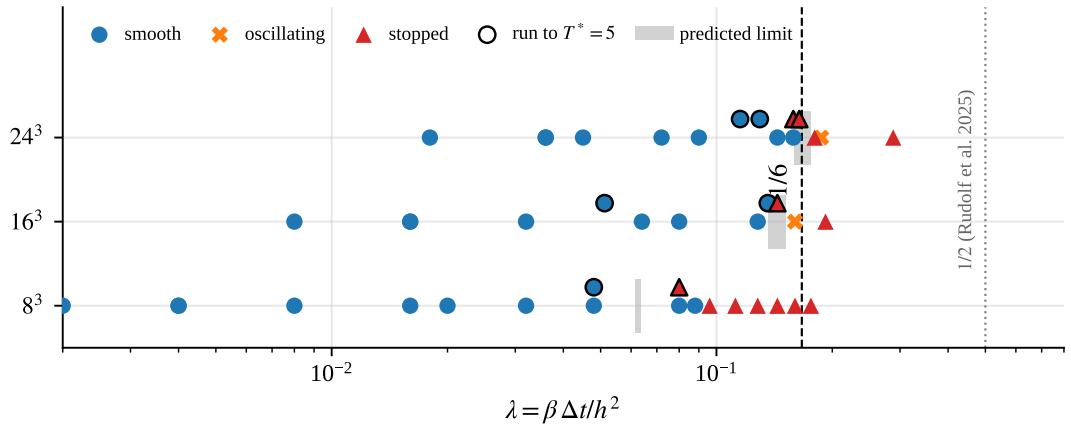



Figure 4.5: Runs of the element against $\lambda = \beta \Delta t / h^2$. Smooth: the run reaches the end time with $\alpha - 1 \geq 0$ and no oscillation between neighbouring elements; oscillating: it reaches the end time, but $\alpha - 1$ alternates in sign; stopped: elements collapse before the end time. End time $T^* = 1.1$; black edge: the two $8^3$ runs to $T^* = 5$. Grey: the limit of the NEM stencil from the Bloch analysis of Appendix D (30 to 32 neighbours). Dashed: 1/6, the limit of the seven-point stencil in three dimensions; dotted: 1/2, the condition given by Rudolf et al. [58].

What I add sits in the material routine, at every Gauss point: take $\phi$ from the field, integrate the second equation of (4.4),

$$\alpha_{n+1} = \alpha_n + k_\alpha \, \phi \, \Delta t, \tag{4.5}$$

and pass $\alpha$ to the growth law. I use the paper's $k_\alpha = 10^{-3}$ per unit of normalised time $T^*$, in the field and in (4.5) alike, and the deck time is $T^*$.

The paper prints a second form of this law (Section 2.2). Table 1, step 3a, of Klempt et al. 2024 integrates $\alpha$ from the change of $\phi$, $(\alpha_{n+1} - \alpha_n)/((1 + \alpha_{n+1})\Delta t) = k_\alpha(\phi_{n+1} - \phi_n)/\Delta t$ (as printed, with $k_\alpha/\eta_\alpha$ read as $k_\alpha$), while its text states that $\alpha$ follows Eq. 36. The two differ in where growth happens. On the reproduced field of test case 4.1, at $T^* = 1$, biofilm present from the start reaches $\alpha - 1 = 9.9 \times 10^{-4}$ with Eq. 36 and stays at zero with Table 1, and newly colonised biofilm reaches $5.4 \times 10^{-4}$ and $8.5 \times 10^{-4}$ (Figure 4.7). A seed that is full from the start, as in the runs of this chapter, grows only under Eq. 36. I follow the text, Eq. 36, as does the partner's element.

### 4.5.2 Growth counted once per increment

ANSYS calls the material routine several times per substep, once per equilibrium iteration and once more for output, and hands back the converged state each time. Equation (4.5)

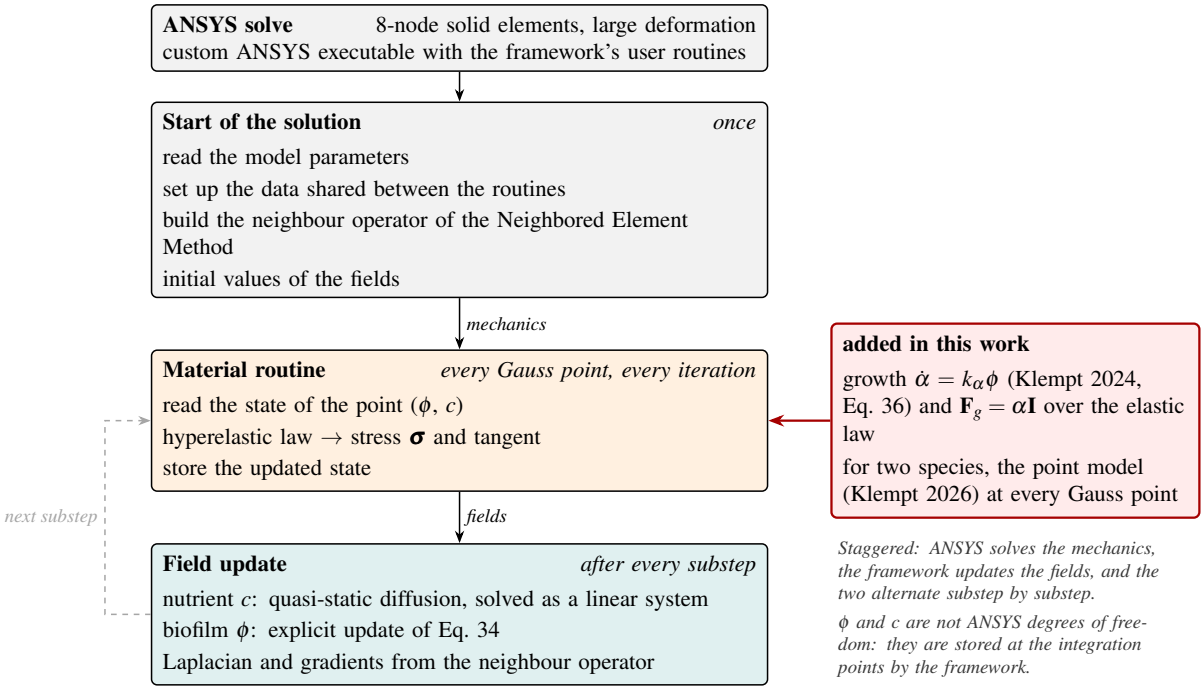



Figure 4.6: Solution loop of the partner framework, traced from its source, and the point at which the growth law of this chapter attaches.

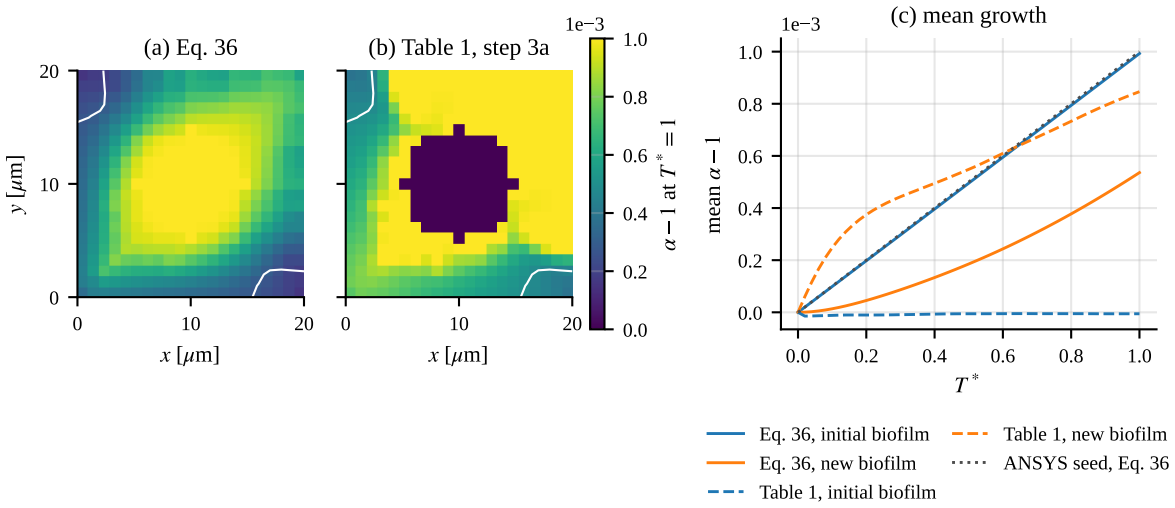



Figure 4.7: The two growth laws of Klempt et al. 2024 on the reproduced field of test case 4.1 (Python), $k_\alpha = 10^{-3}$. (a) Equation 36 and (b) Table 1, step 3a: $\alpha - 1$ at $T^* = 1$ on the mid-plane $z = 10$ $\mu$m (white: $\phi = 0.5$). (c) Mean over biofilm present from the start and over newly colonised biofilm, with the ANSYS seed ($\phi = 1$) under equation 36.

must therefore start from the stored state variable and must not accumulate over iterations. A trace of every call (46 calls over 11 substeps in the first run) confirms that growth is counted once per increment, that each increment starts from the previous one's end value, and that $\alpha$ follows (4.5) exactly.

### 4.5.3 Four properties of the framework found along the way

1. *The element's own growth variable is a mean.* The element already integrates $\dot{\alpha} = k_\alpha \phi$ for each of its two species fields and uses their mean as the growth of the material. With one species the unused field stays at $\alpha = 1$, so the growth is halved. Whether the mean is intended is a question for the framework's author.

2. *Start values.* The void fraction is $1 - \sum \phi_i$, so start values must satisfy $\phi_1 + \phi_2 \leq 1$. The framework's example input starts both species at 1 in the seed; for one species I start the second at 0.

3. *The first result set is not in equilibrium.* While the element sets up its operators it returns zero stress and tangent on its first calls, so the solver converges the first substep on a zero residual. The output written for that substep is not an equilibrium state and is excluded from every result below.

4. *The front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ was switched off, and differs from the paper.* An input-reading slip sets the orientation weight of species 1 to zero (the weights of both species are read into the same variable, and the last one read is zero), so the front-growth term of (4.4) never acts and the biofilm only diffuses. The term is also multiplied by $|\Delta\phi|$ where the paper has $\|\nabla\phi\|$. On a test copy with the slip fixed, $|\Delta\phi|$ makes the explicit update unstable at $\Delta t = 0.005\,T^*$, while $\|\nabla\phi\|$ spreads the seed at the paper's pace but lets $\phi$ exceed 1, and the run breaks down near $T^* = 0.22$. The overshoot follows from a cell Péclet number of about 30 for this advection term on the element's mesh. With the slip fixed and the term discretised upwind, $\phi$ stays below 1, but the biofilm grows both towards the nutrient and away from it, far more slowly than in the paper. Beyond the seed the nutrient is almost uniform, so $\nabla c \approx \mathbf{0}$, while the paper's direction $\nabla c/\|\nabla c\|$ remains a unit vector whose orientation is then set by round-off. In equation (4.4) as stated the direction is undefined wherever $c$ is uniform, so a finer mesh or another scheme does not remove it. I do not regularise it here, because that would add a threshold of my own; the authors' implementation regularises the direction with a small $\varepsilon$ (F. Klempt, personal communication, October 2026; §4.8). The checks of §4.7 do not depend on this term (the gradient-free region has no front, and both ways of computing $\alpha$ see the same field); how far the biofilm spreads does, which is why the example model shows no spreading. For the two-species examples of Section 4.7.1 the term is on, with the slip fixed, the paper's $\|\nabla\phi\|$, the direction regularised as in the authors' implementation and a stabilised discretisation.

### 4.6 The point model at every Gauss point

**The point model.** Klempt et al. [24] describe each species $i$ by its volume fraction $\phi_i$ and its living fraction $\psi_i$, with the void $\phi_0 = 1 - \sum_i \phi_i$:

$$\begin{aligned} (\eta_{\phi,i} + \eta_i \psi_i^2)\, \dot{\phi}_i + \eta_i \phi_i \psi_i\, \dot{\psi}_i &= c^* \psi_i \textstyle\sum_j A_{ij} \phi_j \psi_j - \gamma - (\text{barrier}), \\ \eta_i\, (\phi_i \psi_i\, \dot{\phi}_i + \phi_i^2\, \dot{\psi}_i) &= c^* \phi_i \textstyle\sum_j A_{ij} \phi_j \psi_j - \alpha^* b_i\, \psi_i - (\text{barrier}), \end{aligned} \tag{4.6}$$

where $A_{ij}$ are the interactions, $b_i$ the sensitivity to an antibiotic of concentration $\alpha^*$, $c^*$ the nutrient, $\gamma$ the multiplier for $\sum_i \phi_i + \phi_0 = 1$, and the barrier terms keep $\phi_i, \psi_i$ in $(0, 1)$; $\eta_i$ and $\eta_{\phi,i}$ are the dissipation parameters of the two terms of (2.12), equal to each other in Chapter 3. My implementation reproduces all fourteen numerical examples of the paper. Two printed details had to be read differently to do so: Eq. 17 as printed carries a $+\gamma$ that the figures do not show, and the four-species interaction matrix of Eq. 19 reproduces the figures without its prefactor $\frac{1}{2}$. The same model reproduces the figures of Fritsch et al. [59] within 0.013.

**The point model as published.** Klempt et al. formulate their model on a material point, with $\phi_0$ as an auxiliary variable that enforces $\sum_i \phi_i + \phi_0 = 1$ and is not to be read as a physical void [24]. I therefore do not change the point model: its equations (4.6), its parameters and its constraint stay as published. It is called at every Gauss point with given inputs and returns its state, which is carried from one increment to the next as state variables of the Gauss point. The field keeps its own amount $\phi_{3D}$. Throughout, $\phi_{3D}$ denotes the field of Klempt et al. 2024 and $\phi_i$ the point model.

**From the field to the point model.** The element solves the nutrient $c$ of Klempt et al. 2024, held at given sources and diffusing through the domain. As $\phi_{3D}$, the nutrient is a field of the integration points themselves (the neighboured element method solves it on the Gauss points and the surface points), so the material routine receives the value at its own Gauss point directly, without an interpolation from nodes. The point model needs $c^*$ at its own, much smaller time steps. Between the increments $t_n$ and $t_{n+1}$ I interpolate linearly,

$$c^*(t) = c_0^* \Big[ \tfrac{t_{n+1} - t}{\Delta t}\, c_n + \tfrac{t - t_n}{\Delta t}\, c_{n+1} \Big], \qquad t_n \le t \le t_{n+1}, \tag{4.7}$$

with $c_n, c_{n+1}$ the nutrient at the Gauss point and $c_0^*$ the nutrient level of the point model's own examples. Klempt et al. 2026 already use a time-dependent $c^*$ (their four-species case 3), so the point model accepts such an input without change. The field of Klempt et al. 2024 has no antibiotic. The element solves a second nutrient for its second species, which I do not use; I use this field for an antibiotic $a$, with its own sources and the same diffusion, and pass $\alpha^*(t) = \alpha_0^*\, a$ to the point model, interpolated as in (4.7). Because the element advances its fields after the material routine, the pair $(c_n, c_{n+1})$ is the one of the previous increment. A short first load step, one internal step of the element's field solver

(0.0025 in $T^*$), solves the fields before the point model starts, so the point model begins with the solved nutrient (in the seed $c = 0.79$) and the living biomass of its start state already enters the first consumption.

**From the point model to the field.** Only living biomass consumes nutrient. The consumption of Eq. 35 of Klempt et al. 2024 is printed as $g\phi$; it is $g\phi_{3D}c$, and the printed form is a misprint. In general the uptake depends on the nutrient through a Monod-type factor $f(c) = c/(K_c + c)$; for $K_c \gg c$ this is $c/K_c$, and with $1/K_c$ absorbed in $g$ it is the linear form $g\phi_{3D}c$ used here. The time derivative of Eq. 35 is kept. With the diffusivity of Table 2 of Klempt et al. 2024, $d = 10^{10}$ $\mu$m$^2/T^*$ on their 20 $\mu$m cube, converted like $\beta$ to $d = 10^8$ mm$^2/T^*$ on the 2 mm cube, the nutrient adjusts within about $4 \cdot 10^{-8}\, T^*$, so the fields are solved quasi-steadily; with the time derivative and this $d$ the seed values change by less than 0.005 (Python). The consumption follows the same table: $g = 10^8\, T^{*-1}$, so that $g\ell^2/d = 1$ with the half edge $\ell = 1$ mm. The antibiotic, carried by the element's second nutrient field, has the same diffusivity and uptake as the nutrient. Only a diffusion slower by about eight orders of magnitude would matter: with $d = 1$ mm$^2/T^*$, the value of the element's example input, the antibiotic reaches the seed more slowly and kills markedly less of it (in an earlier set-up with $\alpha_0^* = 50$, a living volume fraction of 0.65 instead of 0.20 in the mixed seed). I scale it by the living volume fraction of the point model,

$$\dot{c} = d\,\nabla^2 c - g\,\phi_{3D}\Big(\sum_{i=1}^{N} \bar{\phi}_i\Big)c, \qquad \bar{\phi}_i = \phi_i \psi_i, \tag{4.8}$$

in the notation of Klempt et al. 2026. The point model normalises its volume, so $\bar{\phi}_i \in [0, 1]$ is the living volume fraction of species $i$ at the point, and $\phi_{3D} \sum_i \bar{\phi}_i \le \phi_{3D}$ is the living volume fraction in the field. A dead biofilm consumes nothing; the void $\phi_0$ has no living fraction and is not part of the sum. The antibiotic is taken up in the same way, $\dot{a} = d_a \nabla^2 a - g_a \phi_{3D}\big(\sum_i \bar{\phi}_i\big)a$. The growth law (4.5) is unchanged: the inflation $\alpha$ measures how much biomass has been produced, alive or dead. The spreading of $\phi_{3D}$ follows Eq. 34 of Klempt et al. 2024 with its front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$, which depends on $c$; this is the path by which the point model reaches the growth and the stress. An antibiotic acts on the stress only through it: it lowers $\psi_i$, so less nutrient is consumed and more reaches the front.

**Time.** Klempt et al. 2024 normalise time with a reference time chosen for the problem at hand. I choose $T^* = 1$ as the duration covered by the point model's data, so that both models run on the same time: the point model advances $s\,\Delta T^*$ per increment, with $s$ the length of that window in its own units, not a fitted value. For the synthetic data of Fritsch et al. [59], case I (1000 steps of $10^{-4}$), $s = 0.1$. With synthetic four-species data and this choice, a point model that keeps its own constraint reproduces the point model alone to $7 \times 10^{-7}$; scaled to the field amount instead, the error is 0.019, and a value of $s$ fitted to

the data comes out a third too low because it absorbs that error.

**Start values.** The point model starts at a Gauss point once $\phi_{3D}$ there reaches $\phi_{\min}$. Where a seed is placed, the start values are those of the seed (one species, or a mixture). A point that the spreading biofilm reaches later takes the living composition of its colonised neighbours: their amounts are divided in the ratio of their living volume fractions $\bar{\phi}_i = \phi_i \psi_i$, and the new point starts alive ($\psi_i = 0.999$, $\gamma = 0$). I chose this rule because the biofilm spreads through the growth of its living cells. The papers do not fix it; the alternative of starting from the seed composition at the nearer seed is compared in Section 4.7. The point model has no transport between points, so the composition moves with the biofilm only through this rule.

**Assumptions.** The coupling rests on choices that neither paper fixes, each with its sensitivity in Section 4.7: the linear interpolation of $c^*$ and $\alpha^*$ in time; $\sum_i \bar{\phi}_i$ taken from the previous increment; the start values of newly reached points; the threshold $\phi_{\min}$; and, for the examples, the uptake of the antibiotic. The time link is no longer one of them.

**The complete step.** Algorithm 1 collects one increment of the coupled run. ANSYS solves the equilibrium $\operatorname{div} \boldsymbol{\sigma} = \mathbf{0}$ by Newton's method; the material routine turns the deformation at a Gauss point into a stress after removing the growth and advances the point model. Its state does not enter the stress, so it does not affect the Newton iteration.

**Algorithm 1** One increment $t_n \to t_{n+1}$ of the coupled run

**Require:** at every Gauss point $\alpha_n$, the point-model state $(\phi_i, \psi_i, \gamma)_n$ and the pair $(c, a)$ seen in the previous increment; the element's fields $\phi_{3D}$, $c$, $a$ of $t_n$
**Ensure:** displacements, stresses and state of $t_{n+1}$

**repeat** {Newton iteration of ANSYS}
  **for all** Gauss points **do**
    $\alpha_{n+1} \leftarrow \alpha_n + k_\alpha \, \phi_{3D} \, \Delta t$ {Eq. (4.5)}
    $\mathbf{F}_e \leftarrow \mathbf{F} \, \mathbf{F}_g^{-1}$, $\mathbf{F}_g = \alpha_{n+1} \mathbf{I}$; stress and tangent from $W(\mathbf{F}_e)$ and $E(\phi_{3D})$
    **if** $\phi_{3D} \geq \phi_{\min}$ or the point model has started **then**
      **if** not yet advanced in this increment **then**
        $(c_n, c_{n+1})$, $(a_n, a_{n+1})$ from the previous and the current value at the Gauss point
        $n_{\text{sub}}$ steps of $s\Delta t / n_{\text{sub}}$ of Eq. (4.6) with $c^*$, $\alpha^*$ from (4.7)
        store $(\phi_i, \psi_i, \gamma)_{n+1}$ and $\sum_i \bar{\phi}_i$
      **end if**
    **end if**
  **end for**
**until** the residual meets the convergence criterion
the element advances $\phi_{3D}$ (Eq. 34 with the front term $-r \frac{c}{k+c} \mathbf{n}_c \cdot \nabla \phi_{3D}$), $c$ and $a$ (Eq. (4.8) with $\sum_i \bar{\phi}_i$)

## 4.7 Results

The one-species runs use ANSYS 2022 R2 on the framework's example model ($8^3 = 512$ elements) or refinements of it, one process, and the growth parameters of Klempt et al. 2024, Table 2: $k_\alpha = 10^{-3}\,T^{*-1}$, one species, the second field started at zero. The model is a 2 mm cube instead of the paper's 20 $\mu$m one. For the diffusion coefficient of (4.4) I use $\beta = 0.02$ mm$^2/T^*$, the value $\beta = 2$ of Klempt et al. 2024, Table 2, converted to the 2 mm cube. The conversion is an assumption: the paper gives no length and time scale, and its first author describes $\beta$ as chosen for sensible results and dependent on the mesh. The framework's example input, $\beta = 10^{-4}$ mm$^2/T^*$, is reported as a sensitivity case. The remaining coefficients of the field and of the nutrient are those of the framework's example input (`/UNITS,MPA`, lengths in mm), not values from the paper: $r = 100$ mm$/T^*$, $k = 0.1$, $d = 1$ mm$^2/T^*$ and $g = 0.5\,T^{*-1}$; with the front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ off (§4.5), $r$ and $k$ do not act. The one-species runs end at $T^* = 1.1$ and the two-species runs at $T^* = 1$, both with $\Delta t = 0.025$; halving the step changes the mean stress in the seed by about 1 %. The two checks against exact solutions below use the example input and $\Delta t = 0.1$, because they need a region without gradients. The two-species examples of Section 4.7.1 differ: they use the constants of the papers, the front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ and the agreed coupling, and their set-up is given there.

**Exact solution inside ANSYS.** Where the field has no gradients, (4.4) reduces to $\dot\phi = k_\alpha\alpha$, $\dot\alpha = k_\alpha\phi$, with the solution $\phi = \sinh(k_\alpha t)$, $\alpha = \cosh(k_\alpha t)$. ANSYS follows the exact solution of its own time stepping to $3 \times 10^{-11}$ in $\alpha$ (round-off) and $1.1 \times 10^{-7}$ in $\phi$, about $10^{-4}$ relative, because the element still sees a small gradient from its neighbours (Figure 4.8).

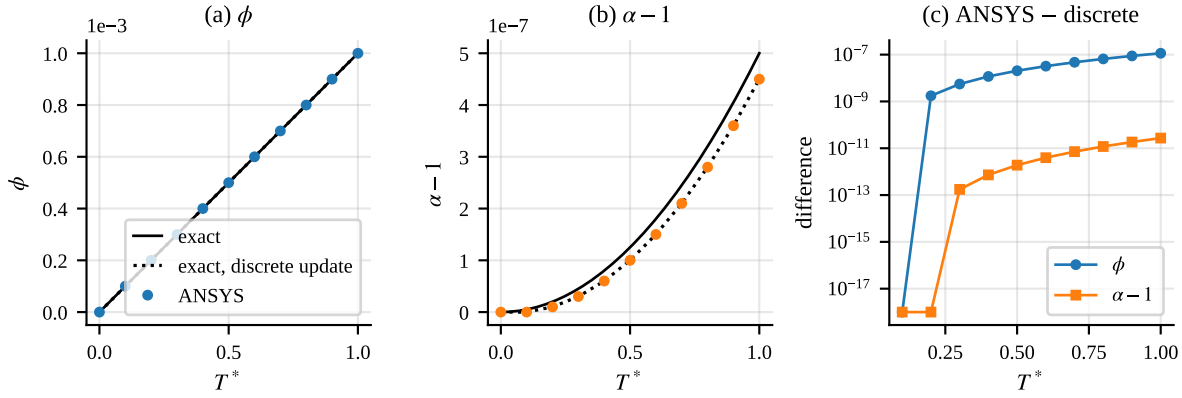



Figure 4.8: A gradient-free region of the coupled ANSYS run (dots): (a) $\phi$ and (b) $\alpha - 1$ against $\phi = \sinh(k_\alpha t)$, $\alpha - 1 = \cosh(k_\alpha t) - 1$ (solid) and the exact solution of the explicit update (dotted); (c) the difference to the latter.

**The whole model.** The element's own growth variable and equation (4.5) give two ways of computing the stress. Over all 512 elements the two von Mises fields have the

same pattern, cosine similarity 1.0000. The element's variable gives 0.455 times the stress of (4.5), which is $\frac{1}{2} \times \frac{10}{11}$: the mean over both species fields, one of them unused, and a lag of one substep (Figure 4.9).

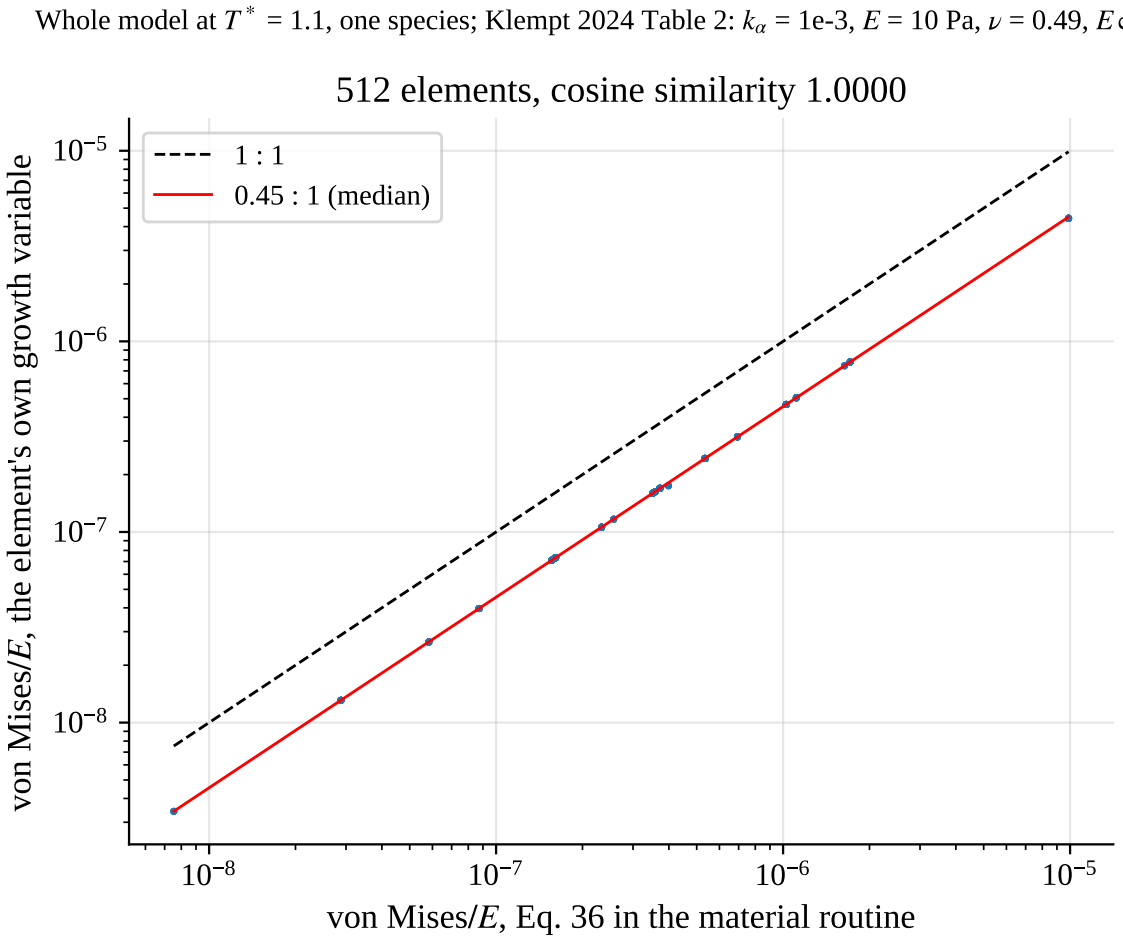



Figure 4.9: Element von Mises stress from equation (4.5) against the element's own growth variable, one point per element.

**Stresses with the published stiffness.** With the stiffness of Klempt et al. 2024, equation (4.2) with $E = 10$ Pa, $\nu = 0.49$ and a void floor $f = 10^{-3}$, $\alpha - 1$ in a monitored element inside the seed reaches $8.9 \times 10^{-4}$ at $T^* = 1.1$ on $16^3$ elements (Figure 4.10). This is less than $k_\alpha \phi t = 1.1 \times 10^{-3}$, because $\phi$ diffuses out of the seed. Klempt et al. [32, 33] report pressure inside the biofilm and a ring of tension at its edge. Grouped by distance from the seed, the mean stress is $-2.5 \times 10^{-4}$ Pa in the seed, $+6.0 \times 10^{-5}$ Pa in the first layer of elements around it and $+1.3 \times 10^{-6}$ Pa in the second; every element of these two layers is in tension. The von Mises stress of this element is $4.7 \times 10^{-4}$ Pa, the seed average $5.9 \times 10^{-4}$ Pa (Table 4.1) and the largest in the model, also inside the seed, $7.2 \times 10^{-4}$ Pa. The element's own growth variable gives 0.49 times the growth and the stress of equation (4.5), which is $\frac{1}{2} \times 1.1/1.125$ for this time step (see the whole-model check above). With the framework's example stiffness ($E = 1000$ MPa, $\nu = 0.3$, blended

linearly) the mean stress in the seed is about $4 \times 10^8$ times larger and the von Mises stress about $2 \times 10^8$ times. Changing $\nu$ from 0.49 to 0.45 or 0.499 changes the mean stress in the seed by less than 2 %.

The first author of the paper has since suggested that its stiffness unit may be wrong and that $E = 10$ kPa is more realistic. Growth is the only load, so all stresses in this chapter then scale by $10^3$; the comparisons and ratios do not change.

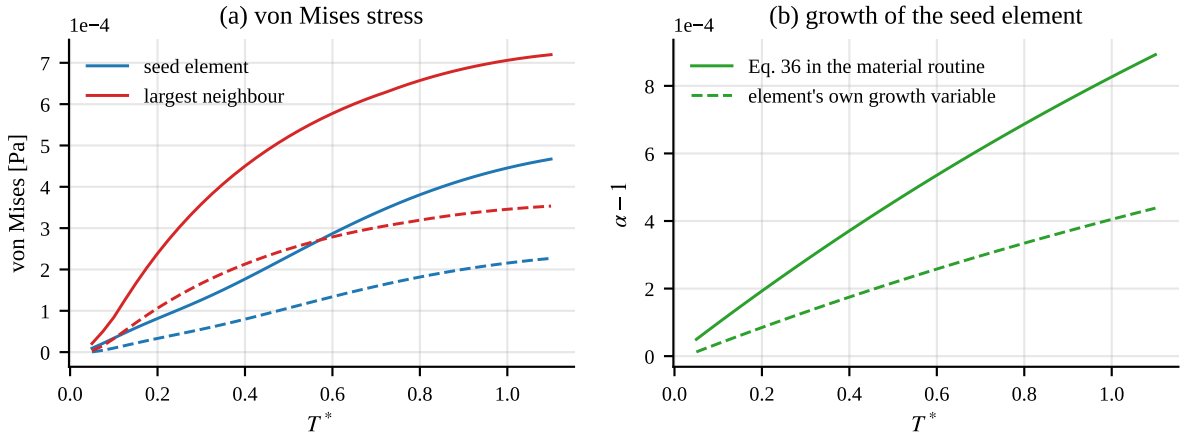



Figure 4.10: (a) Von Mises stress of a monitored element inside the seed and of its most loaded neighbour and (b) growth $\alpha - 1$ of that element over time; $16^3$ elements, $\beta = 0.02$ mm$^2/T^*$, stiffness of Klempt et al. 2024. Solid: equation (4.5) in the material routine; dashed: the element's own growth variable.

**Mesh and incompressibility.** The example model has $8^3$ elements, and its seed is 32 of them. I solved the same mechanical problem (seed growth $1.1 \times 10^{-3}$, the stiffness above) with a linear hexahedral solver in Python on $8^3$, $16^3$ and $32^3$ elements. The seed averages of von Mises and mean stress on $8^3$ are about 1.5 to 1.75 times those on $16^3$ and $32^3$, which agree with each other; the peaks at the corners of the seed do not converge, because those corners are singular. I therefore quote seed averages and not peaks. With the element's mean-dilatation (B-bar) integration the mean stress hardly changes between $\nu = 0.49$ and 0.499 ($-3.8$ and $-4.1 \times 10^{-5}$ Pa on $8^3$), so there is no volumetric locking; full $2 \times 2 \times 2$ integration would overestimate it by a factor of 3.7 on $8^3$ and 2.3 on $16^3$ at $\nu = 0.49$.

The ANSYS model uses the same integration (SOLID185, KEYOPT(2) = 0, B-bar). In ANSYS I refined the example model to $16^3$ and $24^3$ elements, with every boundary condition mapped by position ($32^3$ exceeds the memory of the workstation in the nutrient solve). Table 4.1 gives the seed averages and the first layer around the seed. The mean stress and the ring of tension agree within about 3 % on the three meshes, and the von Mises stress changes by 3 % from $16^3$ to $24^3$.

Table 4.1: Seed averages and the first layer of elements around the seed at $T^* = 1.1$, $\beta = 0.02$ mm$^2/T^*$, $\Delta t = 0.025$ [Pa].

| | $8^3$ | $16^3$ | $24^3$ |
|---|---|---|---|
| mean stress, seed | $-2.52 \times 10^{-4}$ | $-2.53 \times 10^{-4}$ | $-2.45 \times 10^{-4}$ |
| mean stress, first layer | $+6.01 \times 10^{-5}$ | $+6.04 \times 10^{-5}$ | $+5.85 \times 10^{-5}$ |
| von Mises, seed | $4.83 \times 10^{-4}$ | $5.87 \times 10^{-4}$ | $6.06 \times 10^{-4}$ |

**Order of convergence.** With the surface points corrected (§4.8), I repeated the seed growth on the three meshes with $\Delta t = 0.1$, 0.05, 0.025 and 0.0125, on $24^3$ from $\Delta t = 0.05$ (Figure 4.11); the seed values agree with Table 4.1 within 0.03 %. Halving the time step halves the change, so the update is first order in time, and the error at $\Delta t = 0.025$ is about 1 % in the seed von Mises stress. A fit through the three meshes alone would give an observed order of about 2.1 for the seed von Mises stress; three meshes cannot check this, and a finer reference shows otherwise. I solved the mechanics with a separate hexahedral code (mean-dilatation integration, the stiffness of Eq. (4.2)) for the reference growth field described next, on meshes up to $48^3$, once with one value of $\phi$ and $\alpha$ per element and once with the values at the $2 \times 2 \times 2$ integration points, as the element carries them. The first series approaches the seed von Mises stress from above, the second from below; on $48^3$ they give 6.11 and $6.07 \times 10^{-4}$ Pa, so the converged value lies between the two, 2 % above the element's value on $24^3$ after extrapolation to $\Delta t \to 0$. With the Gauss-point values the code reproduces the element's seed stress within 3.5 % on $8^3$ and within 1 % on $16^3$ and $24^3$; on the coarse mesh the Gauss points smooth the step in $\alpha$ at the surface of the seed inside an element, which lowers the stress. The stress converges only to about first order, because the stiffness jumps at the surface of the seed.

For the growth field itself the error can be measured. Without the front term the seed problem is the linear system of Eqs. (2.5) and (2.7) with the penalty of the element, and I solved it with second-order finite volumes and a fourth-order Runge–Kutta scheme on $48^3$, $96^3$ and $192^3$ cells (the seed is a union of cells on each grid). The seed mean of $\alpha - 1$ converges with an observed order of 1.97, and the Richardson extrapolation of the two finest grids is the reference, with a remaining error below 0.05 %. Averaged over the elements of each NEM mesh and compared element by element (Figure 4.11, right), the element's $\alpha - 1$ after extrapolation to $\Delta t \to 0$ is too large by 4.1 % in the seed mean on $8^3$, 1.3 % on $16^3$ and 0.7 % on $24^3$, an order of about 1.7 in $h$; the $L_2$ norm of the element-wise error over the cube is 5.1, 1.9 and 1.1 %. The error is largest near the edge of the seed, where the gradient of $\phi$ is steepest (5.5 % at 0.4 mm from the centre on $8^3$, 0.2 % on $24^3$), and smallest at the centre (0.5 to 0.2 %). The domain integral of $\alpha - 1$ is within 0.3 % on every mesh: the explicit update conserves the mass of $\phi$ up to the source, and the mesh error redistributes the growth between the seed and its surroundings. At $\Delta t = 0.0125$ the errors are about 0.2 % larger than after extrapolation.

The diffusion coefficient sets the size of the stresses (Table 4.2): $\phi$ that diffuses out of

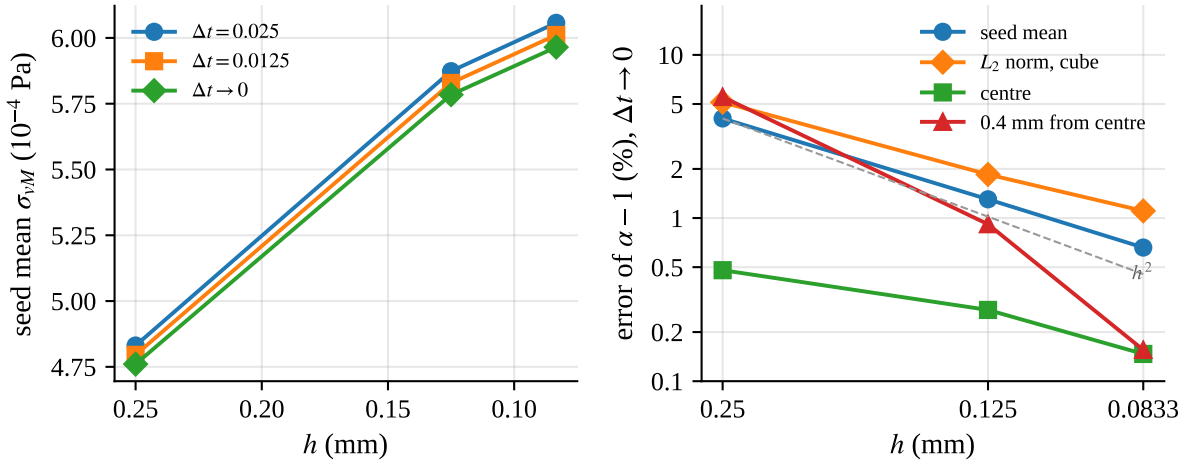



Figure 4.11: Seed growth at $T^* = 1.1$, $\beta = 0.02$ mm$^2/T^*$, surface points corrected. Left: seed mean of the von Mises stress against the element size $h$ for two time steps and the first-order extrapolation $\Delta t \to 0$. Right: error of $\alpha - 1$ of the element against the finite-volume reference solution, averaged over the same elements, after extrapolation to $\Delta t \to 0$: seed mean, $L_2$ norm over the cube, and the values at the centre of the seed and 0.4 mm from it; the dashed line is second order.

the seed lowers its growth near the surface, and the step in $\alpha$ between the inside and the surface of the seed loads it. From $\beta = 0.005$ to 0.1 mm$^2/T^*$ the mean stress in the seed falls by a factor of about four on $8^3$ and eight on $16^3$. For $\beta \geq 0.02$ the diffusion length $\sqrt{\beta T^*} \geq 0.14$ mm is resolved by the meshes, and $8^3$ and $16^3$ agree within 11 % at $\beta = 0.02$ and 0.05 and within 16 % at $\beta = 0.1$. For smaller $\beta$ the layer is thinner than an element and the results depend on the mesh. With the example input, $\beta = 10^{-4}$ mm$^2/T^*$, the layer is 0.01 mm thick: the step in $\alpha$ grows from 0.4 to 1.8 % from $8^3$ to $24^3$, and the seed von Mises stress ($7.5 \times 10^{-5}$ to $1.5 \times 10^{-4}$ Pa) does not converge. With $\beta = 0$ the step vanishes and the ratios $16^3/8^3$ are those of the Python study above.

Table 4.2: Mean stress in the seed at $T^* = 1.1$ for different $\beta$ [Pa]; $\beta = 0.02$ is the value used in this chapter. All runs with $\phi$ at the surface points updated (§4.8); $16^3$ at $\beta = 0.1$ with $\Delta t = 0.0125$.

| $\beta$ [mm$^2/T^*$] | 0.005 | 0.01 | 0.02 | 0.05 | 0.1 |
|---|---|---|---|---|---|
| $8^3$ | $-2.1 \times 10^{-4}$ | $-2.7 \times 10^{-4}$ | $-2.5 \times 10^{-4}$ | $-1.3 \times 10^{-4}$ | $-5.6 \times 10^{-5}$ |
| $16^3$ | $-3.9 \times 10^{-4}$ | $-3.4 \times 10^{-4}$ | $-2.5 \times 10^{-4}$ | $-1.2 \times 10^{-4}$ | $-4.7 \times 10^{-5}$ |

### 4.7.1 Two species with nutrient and antibiotic

**Set-up.** The examples use the coupling of Section 4.6 with the synthetic data of Fritsch et al. [59], case I, two species (A and B, $b = (1, 2)$). All constants are those of the papers: the field and the nutrient from Klempt et al. 2024, Table 2, converted to the 2 mm cube ($\beta = 0.02$ mm$^2/T^*$, $r = 10$ mm$/T^*$, $d = 10^8$ mm$^2/T^*$, $g\ell^2/d = 1$, $E = 10$ Pa, $\nu = 0.49$, void floor $f = 10^{-3}$), and the antibiotic of case 4 of Klempt et al. 2026 ($\alpha_0^* = 100$ from

$T^* = 1/3$), with the diffusion and uptake of the nutrient. The threshold is $\phi_{\min} = 0.001$; it is not given by the papers and changes the results by less than 1 % below this value. In the separate example species A fills the seed of this chapter and species B four small blocks along the edges of the cube; in the mixed example both start in the seed, in equal amounts ($\phi_1 = \phi_2 = 0.275$) or in the proportions of Fritsch et al. (0.25, 0.30). The nutrient is held on the face $y = -1$ mm, the antibiotic on all outer faces. The front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ of Eq. 34 is on in every run.

These runs use a finite-volume code in Python that solves the same equations as the element, with the point model of the ANSYS runs; the coupled point model agrees with the point model alone to $2 \times 10^{-14}$ in the replay check above. The front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ is advection dominated: its cell Péclet number $rh/(2\beta)$ is about 31 on the $16^3$ mesh, and a central gradient oscillates. I discretise it with a second-order upwind scheme (MUSCL with the minmod limiter) and mirror the fields at the walls. The stress is solved on a $16^3$ hexahedral mesh with the element's integration; solving the same $64^3$ field on $32^3$ and $64^3$ elements changes the seed von Mises stress by 0.2 %.

**Composition.** Table 4.3 gives the seed means at $T^* = 1$, and Figures 4.12 and 4.13 the separate and the mixed example with antibiotic. Without antibiotic the living volume fraction of the seed stays near 0.96; the antibiotic lowers it to 0.15 when the species start separately and to 0.04 when they start mixed. Species B, the more sensitive one, is removed first; where the nutrient is low, A dies as well, because the point model compares $c^* = c_0^* c$ with $\alpha^* b_i$. Living volume fraction, shares and nutrient change by less than 3 % between the grids and the time steps used.

Table 4.3: Seed means at $T^* = 1$, Python, $64^3$ cells, outer time step 0.025; growth and stress converged values in Table 4.4.

| example | $\sum_i \bar{\phi}_i$ | $\phi_1/(\phi_1+\phi_2)$ | $c$ | $\alpha - 1$ | von Mises [Pa] |
|---|---|---|---|---|---|
| separate | 0.965 | 0.978 | 0.536 | $9.06 \times 10^{-4}$ | $6.56 \times 10^{-4}$ |
| separate, antibiotic | 0.152 | 0.951 | 0.911 | $8.95 \times 10^{-4}$ | $5.68 \times 10^{-4}$ |
| mixed, equal amounts | 0.961 | 0.859 | 0.608 | $8.33 \times 10^{-4}$ | $3.50 \times 10^{-4}$ |
| mixed, equal amounts, antibiotic | 0.038 | 0.610 | 0.973 | $8.30 \times 10^{-4}$ | $3.23 \times 10^{-4}$ |
| mixed (0.25, 0.30), antibiotic | 0.037 | 0.510 | 0.973 | $8.30 \times 10^{-4}$ | $3.22 \times 10^{-4}$ |

**Growth and stress.** The growth $\alpha - 1$ hardly depends on the composition: Eq. 36 is unchanged, and the antibiotic lowers the living fraction but not $\phi_{3D}$. The composition reaches the stress through the nutrient and the front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$, and the mixed seed carries about half the stress of the separate one because its edge is less sharp. Table 4.4 gives the grid series with the three-grid index of Celik et al. [60] (safety factor 1.25) at an outer time step of 0.0025. The growth converges with a GCI of 0.7 to 3.3 % in all examples. The seed stress is set by the jump of $\alpha$ across the edge of the seed, which

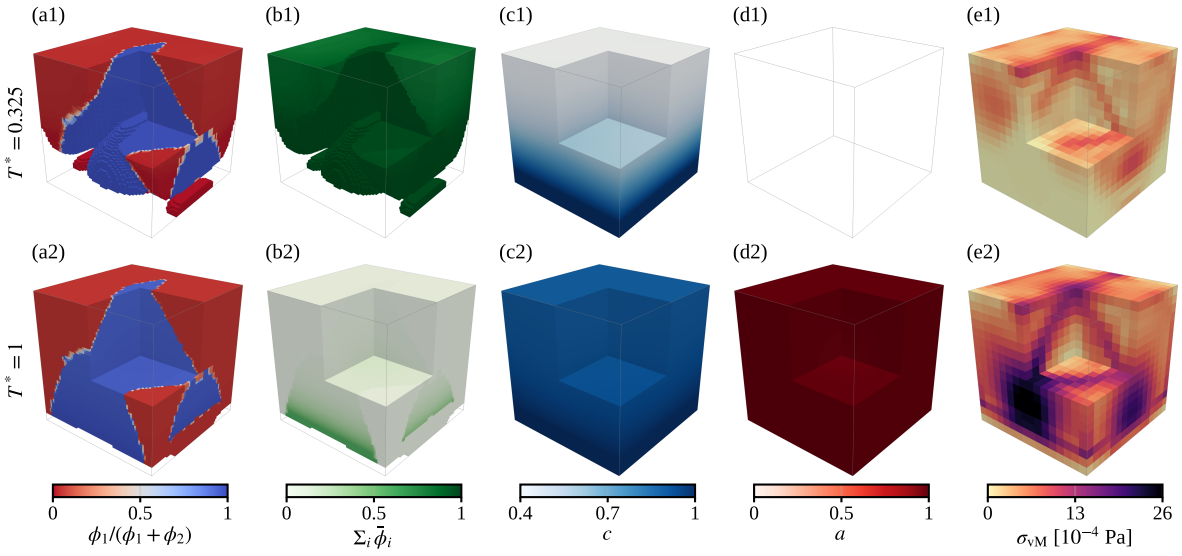



Figure 4.12: Separate example with antibiotic at $T^* = 0.325$ (top) and $T^* = 1$ (bottom), Python, $64^3$, one octant removed: (a) share $\phi_1/(\phi_1 + \phi_2)$, (b) living volume fraction $\sum_i \bar{\phi}_i$, (c) nutrient $c$, (d) antibiotic $a$, (e) von Mises stress.

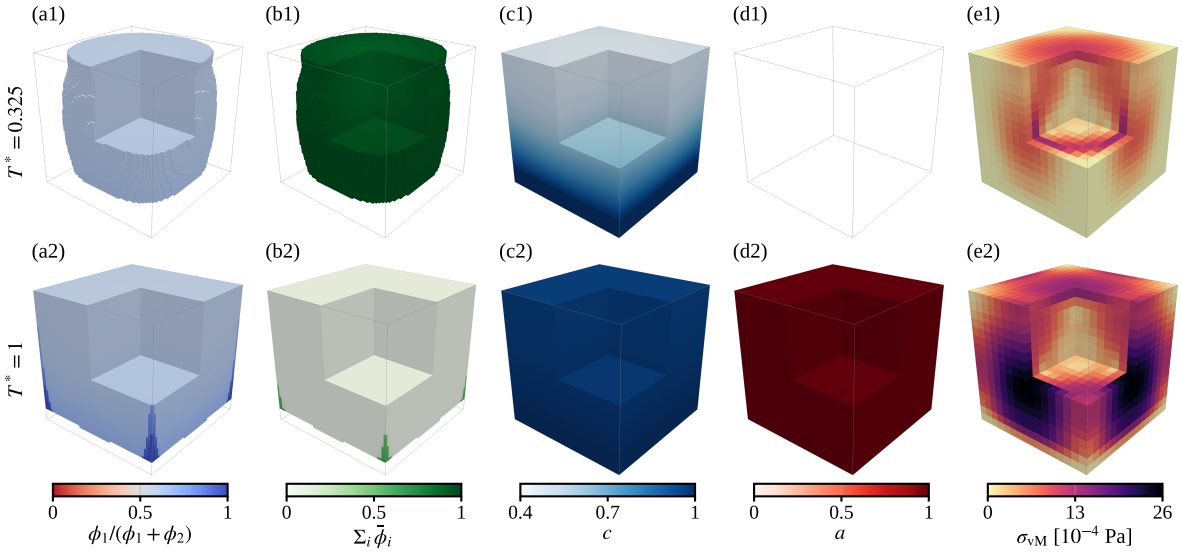



Figure 4.13: Mixed example (equal amounts) with antibiotic, panels as in Figure 4.12. Both species start in the seed; the living volume fraction falls almost everywhere after the antibiotic.

the front sharpens. In the separate example it converges, with a GCI of 0.7 % without and 8 % with the antibiotic. In the mixed examples it converges slowly, with an observed order of about 0.75 and a GCI of 26 to 29 %; with the start fractions of Fritsch et al. the $128^3$ grid is not yet in the asymptotic range. There the front carries intermediate values of $\phi_{3D}$ at a nearly discontinuous edge, and the largest $\phi_{3D}$ in the seed still rises with the grid (0.60, 0.69, 0.73).

Table 4.4: Seed means at $T^* = 1$, outer time step 0.0025: grid series, observed order $p$, extrapolated value and GCI. Mixed: equal amounts unless the start fractions $(\phi_1, \phi_2)$ are given; –: not yet in the asymptotic range.

| example | quantity | $32^3$ | $64^3$ | $128^3$ | $p$ | extrapolated | GCI |
|---|---|---|---|---|---|---|---|
| separate, antibiotic | $\alpha - 1$ [$10^{-4}$] | 8.453 | 8.931 | 9.112 | 1.4 | 9.22 | 1.5 % |
| separate, antibiotic | von Mises [$10^{-4}$ Pa] | 5.523 | 6.000 | 6.284 | 0.75 | 6.70 | 8.3 % |
| separate | $\alpha - 1$ [$10^{-4}$] | 8.729 | 9.014 | 9.110 | 1.6 | 9.16 | 0.7 % |
| separate | von Mises [$10^{-4}$ Pa] | 7.440 | 6.730 | 6.585 | 2.3 | 6.55 | 0.7 % |
| mixed, antibiotic | $\alpha - 1$ [$10^{-4}$] | 7.42 | 8.04 | 8.32 | 1.2 | 8.54 | 3.3 % |
| mixed, antibiotic | von Mises [$10^{-4}$ Pa] | 2.00 | 2.82 | 3.30 | 0.76 | 3.99 | 26 % |
| mixed | $\alpha - 1$ [$10^{-4}$] | 7.46 | 8.08 | 8.35 | 1.2 | 8.56 | 3.1 % |
| mixed | von Mises [$10^{-4}$ Pa] | 2.13 | 3.08 | 3.65 | 0.74 | 4.50 | 29 % |
| mixed (0.25, 0.30), antibiotic | $\alpha - 1$ [$10^{-4}$] | 7.42 | 8.04 | 8.31 | 1.2 | 8.51 | 3.1 % |
| mixed (0.25, 0.30), antibiotic | von Mises [$10^{-4}$ Pa] | 2.01 | 2.96 | 4.01 | – | – | – |

**Time step.** The point model advances once per outer step of the field. The composition and $\alpha - 1$ change by less than 3 and 0.3 % between outer steps of 0.02 and 0.0025 (with an integer number of inner steps). The stress does not: in the separate example the step 0.025 of Table 4.3 gives about 6 % less than the limit, which first-order extrapolation puts at about $6.07 \times 10^{-4}$ Pa on $64^3$; in the mixed example it gives about 15 % more (3.23 against $2.82 \times 10^{-4}$ Pa at 0.0025). The inner steps of the point model, the one-increment lag of $\sum_i \bar{\phi}_i$ and the regularisation of the front direction ($\varepsilon^2 = 10^{-6}$ against $10^{-8}$, 0.1 %) are not the cause. Without antibiotic the step changes the stress by 2.5 % (separate) and 12 % (mixed). I therefore take the growth and the stress from the grid series at the small step.

**Antibiotic over time.** With the same total dose given constantly, in pulses or as a sine from $T^* = 1/3$, $\alpha - 1$ and the stress change by less than 1.5 %, while the living volume fraction follows the dose: in the pauses of the pulsed dose it recovers from 0.16 to 0.28 in the separate example. The antibiotic acts on the composition and the living biomass, not on the mechanics.

**Start values of newly reached points.** With the start values of the nearer seed instead of the neighbours' living composition, the seed values of the cube examples differ by a few percent (living volume fraction 0.147 against 0.152 in the separate example with

antibiotic). In the maze of Klempt et al. 2024, Fig. 11, where the biofilm keeps spreading after the antibiotic, the rule decides whether it recovers: at $T^* = 60$ the living volume fraction is 0.35 with the neighbours' composition and 0.04 with the start state.

**The element.** The ANSYS element solves the same equations with its own discretisation (Section 4.5). Its growth agrees with the Python values within 4 % after extrapolation. Its stress depends on how the front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ is stabilised: with a constant added diffusion $rh/4$ the seed stress on $16^3$ is about a quarter of the converged value, and with upwind gradients it is 2.14, 4.56 and $5.15 \times 10^{-4}$ Pa on $8^3$, $16^3$ and $24^3$, extrapolated $5.8 \times 10^{-4}$ Pa (GCI 16.5 %). This lies within the band of the second-order schemes in Python. The element runs the point model in every increment of 0.00125, so its outer-step error is small. I take the values of this section from the Python code, which reaches finer grids.

### 4.7.2 The calibrated five-species model in the element

The coupling of Section 4.6 takes the number of species as a parameter, so the point model calibrated in Chapter 3 can be run in the element without changes to the routine. I used the MAP of the commensal flow condition (CH) from the calibration to the measured data, with $c^* = 25$ and $\alpha^* = 0$, and otherwise the setting of the two-species runs: the same $8^3$ model, the growth law (4.5) driven by the field, $\phi_{\mathrm{cap}} = 0.9$, $s = 0.15$ and $\Delta t = 0.025$ up to $T^* = 1$. The point model starts from the calibrated Day-1 state of the condition (*S. oralis* 0.76, *V. dispar* 0.11, *F. nucleatum* 0.10, *A. naeslundii* 0.02, *P. gingivalis* 0.001, living fractions 0.999). This run predates the agreed coupling of Section 4.6: the coupling is one-way, without front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ and antibiotic, so the growth and the stress do not depend on the composition: the seed mean of $\alpha - 1$ is $6.752 \times 10^{-4}$, the same to all printed digits as in the two-species runs and as in a run started from equal shares, and with the stiffness of Klempt et al. 2024 ($E = 10$ Pa, $\nu = 0.49$) the seed mean of the von Mises stress is $4.68 \times 10^{-4}$ Pa.

Figure 4.14 shows the composition at a Gauss point of the seed. *S. oralis* stays the largest share but falls from 0.74 to 0.55 at $T^* = 1$, while *V. dispar* (0.15), *A. naeslundii* (0.13) and *P. gingivalis* (0.08) grow and *F. nucleatum* stays near 0.09. The living volume fraction $\sum_i \phi_i\psi_i$ falls from 0.81 to 0.23, mostly through the living part of *S. oralis*. Started from equal shares instead (a run with the preliminary MAP), *A. naeslundii* would become the largest share (0.38), so the composition in the element depends on the start as in the point model alone. These numbers show that the calibrated model runs inside the element; they are not compared with a measured spatial composition. An earlier run with a preliminary CH MAP, which differs only in entries not identified in CH, gave the same growth, stress and nutrient field to all digits and shares within 0.02.

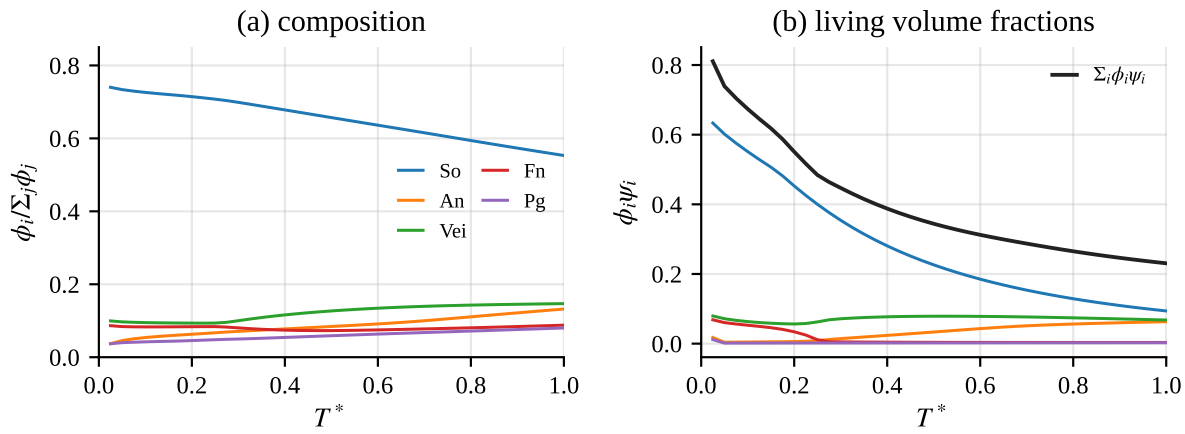



Figure 4.14: The five-species point model calibrated in Chapter 3 (commensal flow condition, MAP) in the element with the earlier one-way coupling of this chapter, $8^3$, at a Gauss point of the seed: (a) shares $\phi_i / \sum_j \phi_j$, (b) living volume fractions $\phi_i \psi_i$ and their sum. Start from the calibrated Day-1 state.

## 4.8 Limitations

- *Validation.* Everything in this chapter is verification. No measured stress is available to validate against.

- *Faces of the cube.* In the element used here, $\phi$ at the surface points was not updated and stayed 0, so every face acted as $\phi = 0$ where Eq. (4.4) has no flux. With these points set to the mean of their neighbouring Gauss points, the runs with $\beta = 0.02$ mm$^2/T^*$ change by less than 0.13 % in the seed stress and in $\alpha$ and by less than 0.5 % in the composition, so their values are kept. Where $\phi$ reaches the faces (larger $\beta$, longer times) the seed pressure changes by up to 30 %; the $8^3$ values of Table 4.2 for $\beta = 0.05$ and 0.1 are those of the corrected runs. The corrected value is a weighted mean of the neighbouring Gauss points, which is exact only for a constant field. In a Python model of the operator the Laplacian at the Gauss points next to a face then has an error of order one that does not decrease with the mesh. In the seed runs this does not show: $\alpha - 1$ in the layer of elements at the faces is below $10^{-5}$, about 1 % of its maximum, and this layer carries 0.1–0.2 % of the squared error against the reference on $8^3$ to $24^3$, while the interior error falls from 5.2 to 1.2 %. A fit of the surface value that is exact for linear fields, as used for the temperature, would remove it.

- *No stress feedback.* The composition reaches the mechanics only through the nutrient and the front term $-r \frac{c}{k+c} \mathbf{n}_c \cdot \nabla \phi_{3D}$; no material parameter depends on the species, and the stress does not act back on growth.

- *No transport between points.* The point model has no space, so the composition moves with the biofilm only through the start values of newly reached points.

- *Front speed.* The front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ of Eq. 34 depends on the nutrient only, not on the living biomass. After the antibiotic, dead biofilm keeps spreading: in the maze, two thirds of the cells reached after the antibiotic have only dead biofilm as neighbours. Linking the front speed to the living biomass would change the model and is left for future work.

- *Stiffness of dead biofilm.* The stiffness $E(\phi_{3D})$ of Eq. (4.2) counts dead biomass as well. For the short times considered this is a reasonable assumption, since much of the stiffness comes from the matrix.

- *Assumptions.* The interpolation of $c^*$ and $\alpha^*$ in time, the one-increment lag of $\sum_i \bar{\phi}_i$, the start values of newly reached points, $\phi_{\min}$, the antibiotic uptake and the converted $\beta$ are not given by the papers. All are reported with their sensitivity.

- *Pressure term.* The spherical term of §4.4.3 is documented, not corrected. It does not change the von Mises stress at a given deformation, and at $\nu = 0.49$ it is 1.3 % of the constrained pressure.

- *Incompressibility.* The paper's exact constraint is approximated by $\nu = 0.49$ with the element's mean-dilatation formulation; the mean stress in the seed changes by less than 2 % between $\nu = 0.45$, 0.49 and 0.499.

- *Mesh.* With $\beta = 0.02$ mm$^2/T^*$ the mean stress in the seed and in the first layer around it agrees within about 3 % on $8^3$, $16^3$ and $24^3$ elements, and the seed von Mises stress within 3 % between $16^3$ and $24^3$; with the example input $\beta = 10^{-4}$ mm$^2/T^*$ they do not converge. Peak stresses at the seed corners are mesh dependent and not reported.

- *Growth law.* The paper gives two forms of the $\alpha$ law (Eq. 36 and Table 1). I use Eq. 36; under Table 1 a full seed would not grow.

- *Consumption.* The one-species ANSYS results of this chapter use the consumption $g\,\phi$ as printed (Eq. 35); the two-species examples use $g\,\phi_{3D}(\sum_i \bar{\phi}_i)\,c$. The authors confirmed the form $g\,\phi\,c$ (Chapter 2, Appendix C), which I use in the Python comparisons; there the share follows the local nutrient under both forms (§4.9.1).

- *Front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$.* The direction $\nabla c/\|\nabla c\|$ of this term in Klempt et al. 2024 is undefined where $\nabla c = \mathbf{0}$; I regularise it with $\|\nabla c\|^2 + \varepsilon^2$, $\varepsilon^2 = 10^{-6}$, as the authors' implementation does with a small $\varepsilon$ (F. Klempt, personal communication, October 2026); $\varepsilon^2 = 10^{-8}$ changes the stress by 0.1 %. The term is advection dominated, and the stress converges only with a second-order scheme and slowly in the mixed example (Table 4.4).

- *Magnitude.* With the published growth rate, $\alpha - 1$ stays below about $10^{-3}$ up to $T^* = 1$, and with the published stiffness the largest von Mises stress is about

$7 \times 10^{-4}$ Pa (0.7 Pa with $E = 10$ kPa, the value suggested by the paper's first author).

## 4.9 Outlook: towards a fully coupled model

The coupling of this chapter is two-way between the fields and the point model: the field feeds the point model, and the living biomass sets the consumption. The mechanics is coupled one way: growth produces stress, but the stress does not act on growth, and the composition does not act on the stiffness. The steps below were the path towards it, ordered by how well the literature supports them; the first is now part of the coupling, the others remain open.

1. *Local nutrient into the point model.* Klempt et al. [24] treat $c^*$ as a given, possibly time-dependent, variable; replacing it by the local $c$ of the field needs no new physics.

2. *Composition into the spreading.* In the earlier spatial model the front factor and the consumption depend on the species [33]; $R_s = \sum_i \phi_i R_{s,i} / \sum_j \phi_j$ and $g = \sum_i \phi_i g_i / \sum_j \phi_j$ would let the composition shape where the biofilm grows. The front term $-r \frac{c}{k+c} \mathbf{n}_c \cdot \nabla \phi_{3D}$ is now on in the two-species examples (Section 4.7.1).

3. *Composition into the stiffness.* $E = \sum_i \phi_i E_i / \sum_j \phi_j$ would let the composition reach the stress directly, but species-specific moduli are not available [61].

4. *Stress into growth.* The mechanical term of Klempt et al. 2024, Eq. 30, dropped in their Eq. 34, and stress-dependent growth as in [62] would close the loop from the mechanics back to the field.

Step 1 is now part of the coupling (Section 4.6). Step 2 is the natural first goal of the continuation at Keio; it must reduce to the present scheme when the species are made equal.

### 4.9.1 First steps, computed in Python

I computed the first three steps in Python, outside ANSYS, to see which of them change the results. These computations predate the agreed coupling of Section 4.6: they use the earlier one-way scheme, in which the composition is scaled to the amount of the field, and cases 3 and 6 of Klempt et al. 2026. The papers give no growth rates or moduli per species. The rates are estimated from the dissipation parameters $\eta_i$ under a stated assumption; the moduli are sensitivity parameters.

**Step 1: local nutrient.** On the example model of this chapter (Figure 4.16), the nutrient is held at the face $y = -1$ mm and consumed in the seed; its strength is the Thiele number [63] $\Lambda^2 = g\ell^2/d$ with $\ell = 1$ mm, scanned because $d$ and $g$ of the example input are not taken from the paper. Each point of the seed runs the point model with $c^* = c_0^* \, c$. Case 3 hardly depends on the nutrient level, the share $\phi_1/(\phi_1 + \phi_2)$ staying at 0.63 to 0.66.

In case 6 the takeover is slower where the nutrient is low: for $\Lambda = 4$ the share ranges from 0.03 near the nutrient face to 0.44 in the interior of the seed. The composition thus varies in space without any spreading, which the element cannot show with a constant $c^*$. The values are converged in the grid ($16^3$, $32^3$) and in the coupling step (0.025).

The same step then ran in ANSYS. The nutrient that the element solves at each Gauss point is passed to the point model as $c^* = c_0^* \min(c/c_{\mathrm{ref}}, 1)$ with $c_{\mathrm{ref}} = 1$, the held value; without this input the new build gives the earlier results to the last digit. On the $8^3$ example model with the example input $\beta = 10^{-4}$, case 6, with the point model in all 512 elements and the consumption raised from the example value $g = 0.5\,T^{*-1}$ to $4\,T^{*-1}$ (chosen in this work, not a paper value), the nutrient in the seed falls to 0.44–0.66 and the share $\phi_1/(\phi_1 + \phi_2)$ ranges from 0.025 at the side facing the nutrient to 0.14 at the far side (correlation with $c$: $-0.83$); with the example consumption it is 0.021 everywhere. Halving the time step changes the mean share by 2 %. With $g = 6\,T^{*-1}$, the strongest that keeps $c$ positive, the nutrient falls to 0.15–0.48 and the share ranges from 0.11 to 0.48 (correlation $-0.99$). Case 3 hardly depends on the nutrient (0.656–0.664 at consumption 4), as predicted. This is the first composition in the element that varies in space through the nutrient. Python gives the same: with the consumption set so that the lowest nutrient in the seed is 0.435, as in ANSYS, the share ranges from 0.026 to 0.139. This holds whether the consumption is independent of $c$ (zero order, as printed in Eq. 35 of Klempt et al. 2024 and in the element) or proportional to $c$ (first order, as in the Python study above; the authors confirmed this form for the paper, Appendix C). For $g = 6\,T^{*-1}$ the zero-order Python model gives 0.105 to 0.481, again as ANSYS. The share follows the local nutrient; the order of the consumption changes how $c$ is distributed, and with it the range once the consumption is strong. With zero-order consumption a stronger consumption ($g = 8\,T^{*-1}$) drives $c$ below zero, which is outside the valid range of the model.

With $\beta = 0.02$ mm$^2/T^*$ the result is the same in the seed: $g = 6\,T^{*-1}$ gives a share of 0.12 to 0.46 on $8^3$ and 0.07 to 0.47 on $16^3$, where the face towards the nutrient is resolved. The consumption of Klempt et al. 2024, Table 2, converted to the cube like $\beta$ (an assumption), is weaker: the nutrient in the seed stays at 0.88 to 0.94 and the share at 0.03 to 0.06 ($8^3$), close to the run without nutrient. Over all runs the share at the end depends on the time link $s$, the end time and the local nutrient only through the product $s\,T^*c$ (Figure 4.15): the nutrient acts as the clock of the point model. In case 6 the takeover by species 2 happens between $s\,T^*c \approx 0.03$ and 0.08; a spatial pattern appears where the local values of $s\,T^*c$ straddle this window. The assumed $s$ therefore decides whether a composition pattern is seen at $T^* = 1$, and I report it with this dependence.

**Step 2: composition into the spreading.** On the reproduced field of Klempt et al. 2024, test case 4.1, the front growth rate becomes the mean of the species rates weighted by their shares, $\bar{r} = \big(\phi_1 r_1 + \phi_2 r_2\big)/(\phi_1 + \phi_2)$, with $r_{1,2} = (1 \pm \delta)\,r$ and $r$ from Table 2.1; for $\delta = 0$ the scheme is the one-way one. The weighting has two published precedents. In

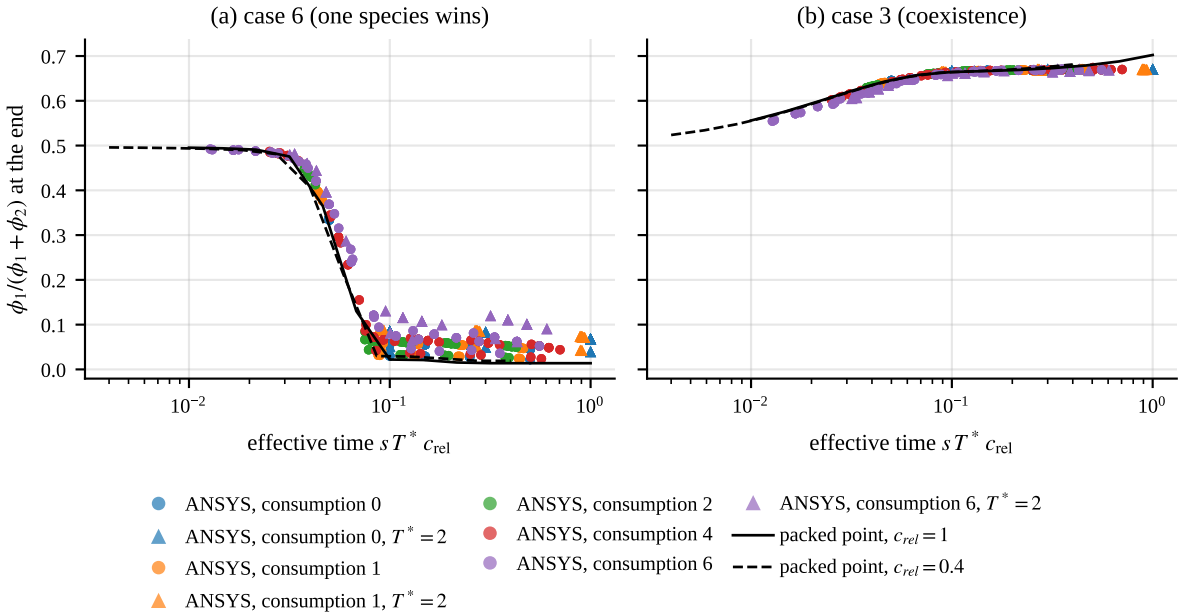



Figure 4.15: $\phi_1/(\phi_1+\phi_2)$ at the end of every seed element of the $8^3$ ANSYS runs ($\beta = 0.02$ mm$^2/T^*$; consumption 0 to $6\,T^{*-1}$, $s = 0.05$ to 1, $T^* = 1$ and 2) against $s\,T^*c$, with $c$ the local nutrient. Lines: one packed point in Python at $T^* = 1$. (a) Case 6 and (b) case 3 of Klempt et al. 2026.

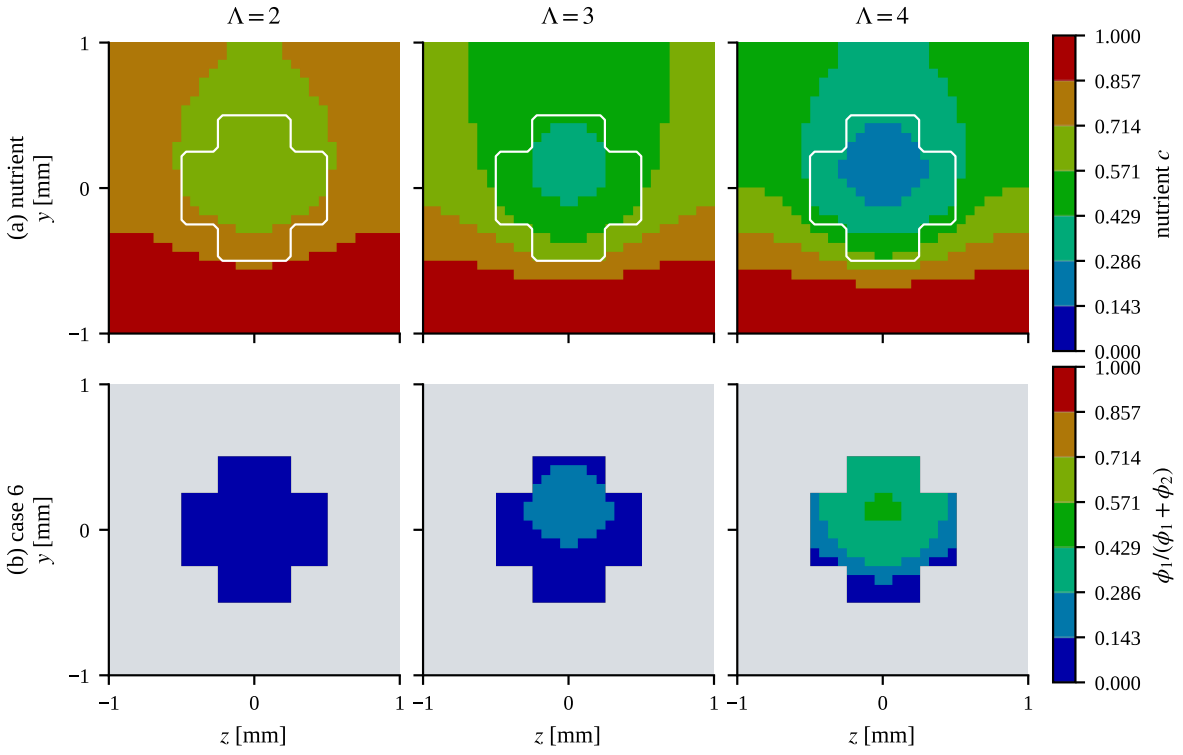



Figure 4.16: Local nutrient in the point model, computed in Python on the example model (section through the seed, $32^3$ grid). (a) Nutrient $c$, held at $y = -1$ mm and consumed in the seed (white outline), for three Thiele numbers $\Lambda$. (b) Share $\phi_1/(\phi_1+\phi_2)$ at $T^* = 1$ for case 6 of Klempt et al. 2026 with $c^* = c_0^*\,c$; grey: no biofilm. Case 3 stays at 0.63–0.66 and is not shown.

the two-species oral biofilm model of Feng et al. [64], the biofilm spreads with a velocity $\mathbf{u}$ whose divergence is the sum of the species' growth, $\nabla \cdot \mathbf{u} = \sum_i \phi_i \mu_i (\ldots)$ with growth rates $\mu_i$, Monod factors $(\ldots)$ and $\sum_i \phi_i = 1$ in the biofilm (their Eq. 15, in the notation used here), which is the same share-weighted rate; there it drives a potential flow of the whole biofilm, here it scales the front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ of the field. Summing the growth sources $R_{s,i}\,\phi_i\,c$ of Soleimani et al. [65] gives the same weighting for a local reaction. The rate contrast has two estimates. In cases 3 and 6 of Klempt et al. 2026 the second species has twice the dissipation of the first, $\eta_1 = 1$, $\eta_2 = 2$; assuming that the front rate of a species scales with $1/\eta_i$ gives $r_1/r_2 = 2$ and $\delta = 1/3$. Feng et al. use maximum growth rates of $3 \times 10^{-5}$ and $8 \times 10^{-5}$ s$^{-1}$ for their two species, the first measured and the second estimated, a ratio of 2.7 and $\delta \approx 0.45$. With $\delta = 1/3$ the mean $\phi$ at $T^* = 1$ rises from 0.704 to 0.735 in case 3, where the faster species is the majority, and falls to 0.648 in case 6, where the slower species takes over; locally $\phi$ changes by up to 0.47 (Figure 4.17). With $\delta \approx 0.45$ from the rates of Feng et al. the two values are 0.746 and 0.626, with $\delta = 0.5$ they are 0.750 and 0.618. The composition itself hardly changes. Which species wins then decides how fast the biofilm spreads. The values are converged in the coupling step. On a grid of half the spacing ($41^3$ nodes, 0.5 $\mu$m) the one-way mean $\phi$ falls from 0.704 to 0.674, and the changes for $\delta = 0.5$, at a coupling step of 0.05, shrink from +6 % and −13 % to +5 % and −8 %: the sign and the order of the effect hold, its size depends on the grid of the reproduced field, for which I keep the paper's 1 $\mu$m. In ANSYS this step needs a working front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$.

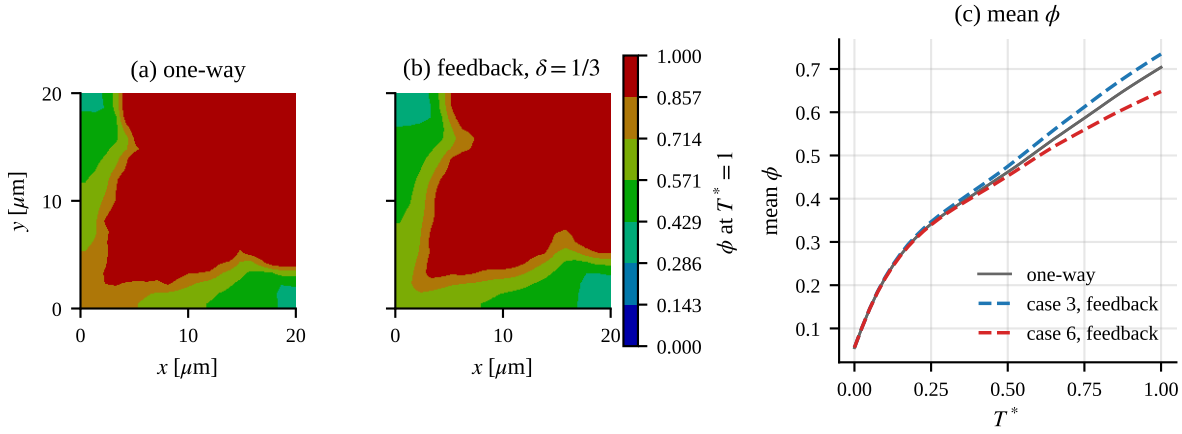



Figure 4.17: Composition acting on the spreading, computed in Python on the reproduced field of Klempt et al. 2024, test case 4.1 (mid-plane $z = 10$ $\mu$m), with species growth rates $r_{1,2} = (1 \pm \delta)\,r$, $\delta = 1/3$ from $\eta_1 = 1$, $\eta_2 = 2$ of Klempt et al. 2026 (assumption: front rate $\propto 1/\eta_i$). (a,b) $\phi$ at $T^* = 1$ for case 6 without and with the feedback (nutrient on the edge at the top right). (c) Mean $\phi$ over time for cases 3 and 6.

**Step 3: composition into the stiffness.** With the seed composition of step 1 and a ratio of the species moduli up to 5 at the same mean modulus, the average stresses in the

seed change by at most 0.2 %. The seed is about a thousand times stiffer than the void around it, so the soft surroundings set its stress. This step matters only where the biofilm itself carries the load, such as a contiguous biofilm on a substrate.

**Step 4: stress into growth.** In the example model the mean stress in the seed, about $2.5 \times 10^{-4}$ Pa, is below $10^{-4}$ times the shear modulus, so a stress-dependent growth law would change little with the published parameters, while the mechanical term of Klempt et al. 2024, Eq. 30, kept as written would stop all growth (Appendix C). This step needs a different growth law and realistic stress levels.

Of the four steps, step 2 changes the results most, and step 1 already runs in the element.

# 5 Conclusion

The task of this thesis was to bring a point model of a multi-species biofilm into an existing finite element framework, so that its composition, its growth and the resulting stresses can be computed in space. Three contributions serve this task.

**A calibrated point model (Chapter 3).** The 15 interaction coefficients of a five-species point model were estimated with TMCMC from the in-vitro time courses of Heine et al. under four conditions. Compiled with JAX, the forward model runs about 150 times faster on the GPU than on the CPU, which makes posteriors with up to 20,000 particles routine. Every stage was repeated with three seeds and checked against convergence criteria; CS, CH and DS meet them at every final stage; in DH the last stage split across seeds, and DH is reported from the stage before. The data determine 5, 6, 9 and 8 of the 15 entries in the four conditions, and the pH, which was not used in the inference, serves as a check. With a metabolic sign prior, the same type of model also predicts sparse in-vivo data of ten patients out of sample.

**A growth law in the finite element framework (Chapter 4).** The growth kinematics $\mathbf{F} = \mathbf{F}_e\mathbf{F}_g$, $\mathbf{F}_g = \alpha\mathbf{I}$, of Klempt et al. 2024 was implemented as an ANSYS user material and verified against closed-form solutions. It was coupled to the biofilm field of the IKM element through the growth equation $\dot{\alpha} = k_\alpha\phi$ at every Gauss point. Inside ANSYS, the coupled run follows the exact solution of a gradient-free region to $3 \times 10^{-11}$ in $\alpha$. With the published parameters the growth in the seeded element reaches $\alpha - 1 = 8.9 \times 10^{-4}$ at $T^* = 1.1$ and the seeded region is compressed; a finer model of the same problem predicts, on average, tension in the surrounding material, consistent with the ring of tension reported by Klempt et al. [32].

**The composition at every Gauss point (Chapter 4).** The point model of Klempt et al. 2026 runs, unchanged, at every Gauss point. It receives the nutrient and an antibiotic from fields of the element, and its living biomass sets the consumption of both, so that the composition reaches the spreading of the biofilm through the nutrient and the front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$. With uniform fields the coupled point model reproduces the point model alone to round-off. In two-species examples with synthetic data an antibiotic lowers the living volume fraction of the seed from 0.97 to 0.15 when the species start separately and to 0.04 when they start mixed, while the growth changes by less than 2 %. The growth converges on refined grids with a GCI below 4 %; the seed stress needs a second-order treatment of the front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ and converges more slowly, with a GCI of 8 % in the separate (0.7 % without antibiotic) and 26 to 29 % in the mixed example. The ANSYS element solves the same equations and agrees within these bands.

Together these steps connect a calibrated description of what a biofilm consists of with a finite element description of how it grows and what stresses it carries, for one and two species.

## 5.1 Discussion

**Where the species live.** Table 5.1 places this work among the continuum models it builds on. Feng et al. [64] and Soleimani et al. [65] give every species its own field and compute no growth stresses; Klempt et al. [32] compute these stresses with a single biofilm variable. This work keeps the single field for the amount of biofilm and its stresses, and adds the composition as a local state at each Gauss point.

Table 5.1: Continuum models of biofilm growth that this work builds on or compares with.

| model | species | space | growth stress | composition |
|---|---|---|---|---|
| Feng et al. 2021 [64] | two fields | FEM, common velocity | no | from the species fields |
| Soleimani et al. 2023 [65] | two fields, co-aggregation | ANSYS user element | no | from the species fields |
| Klempt et al. 2024 [32] | one field | ANSYS user element | yes | none |
| Klempt et al. 2026 [24] | $n$ fractions at a point | none | no | point model |
| this work | one field and a point model per Gauss point | ANSYS, IKM element | yes (no feedback) | point model, nutrient and antibiotic fields |

The number of transported fields therefore does not grow with the number of species; the species enter as a local state at each Gauss point, and the point model, calibrated on its own, enters unchanged. The price is that the species cannot move relative to each other: the composition moves with the biofilm only through the start values of newly reached points, which take the living composition of their neighbours, and varies in space through the local nutrient and antibiotic. Segregation of species by different spreading is outside what this scheme can show.

**Calibrated and chosen parameters.** The interaction coefficients of Chapter 3 come from measured time courses; the pH, which did not enter the inference, follows the measured rise in DH through a regression on the predicted fractions ($R^2 = 0.71$) (Section 3.4). The coupled examples of Chapter 4 use synthetic two-species data (case I of Fritsch et al. [59]) with the antibiotic of Klempt et al. [24], since the calibration data contain no antibiotic. The calibrated five-species point model also runs in the element with the same coupling (Section 4.7.2).

**What the stresses mean.** With the stiffness of Klempt et al. [32] the stresses are of order $10^{-4}$ Pa and scale with the stiffness. What carries over is their pattern: the seeded region is compressed and the surrounding material is under tension, as in the comparison of growth models by Klempt et al. [33] and in the ring of tension of the 2024 paper. Measured stiffnesses of oral biofilms lie in the kPa range, for example 0.6 to 41 kPa by atomic force microscopy, depending on the sucrose supply [66]; as the stresses scale linearly with $E$, a stiffness of 10 kPa gives stresses of order 0.1 Pa. A statement about the magnitude in an oral biofilm needs that stiffness together with a measured stress, which this work does not have.

**The numerical scheme.** The field of the element is advanced explicitly. The condition stated by Rudolf et al. [58] is the one-dimensional one; on the lattice of the Gauss points the stability limit of the NEM stencil follows from a Bloch analysis (Appendix D) and depends on the mesh through the fixed width of the weight and on which equidistant neighbours enter the fit, from 0.06 on $8^3$ to 0.12 to 0.16 on $16^3$ and $24^3$, which runs to $T^* = 5$ confirm. The update is first order in time. For the seed problem the growth field converges at about second order against a finite-volume reference solution, and the stress, with its jump in stiffness at the surface of the seed, at about first order; on $24^3$ the seed stress lies 2 % from its converged value. The front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ of Eq. 34 is advection dominated, with a cell Péclet number of about 31 on $16^3$. A constant added diffusion keeps it stable but gives a quarter of the converged seed stress on that mesh, so the stress needs a second-order scheme; the once-per-step update of the point model adds a time-step error of about 6 % in the stress at an outer step of 0.025. An implicit treatment of the field would remove the step limit; whether it is also more accurate for the same cost is the comparison planned at Keio.

**Symmetric interactions.** The variational derivation makes the interaction matrix symmetric. A symmetric matrix cannot describe one species feeding another without the reverse, which the metabolic literature reports for several of the pairs. In this work the symmetric model reproduces the in-vitro time courses and the rise of the pH in DH; whether a directed term is needed for in-vivo data is open.

## 5.2 Limitations

- *Verification only.* The finite element results are verified against closed forms and against the published models. No measured stress of a growing oral biofilm was available to validate them.

- *No stress feedback.* The composition reaches the spreading only through the nutrient; it does not act on the stiffness, and the stress does not act back on growth, following Klempt et al. 2024, who drop the mechanical term in the growth equation.

- *Front term* $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$. The front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ needs a second-order upwind treatment, and the seed stress converges slowly when the species start mixed. Its speed depends on the nutrient only, so dead biofilm keeps spreading after an antibiotic. The stiffness counts dead biomass as well.

- *Assumptions.* The interpolation of the nutrient and the antibiotic in time, the start values of points the biofilm reaches later and the threshold for starting the point model are not given by the papers. All are reported with their sensitivity.

- *The source model.* The test cases of Klempt et al. 2024 are reproduced only with stated departures from the printed equations (Appendix C), and the paper gives two forms of the law for $\alpha$. I follow its Eq. 36.

- *Mesh and magnitude.* For a seed with a sharp edge, the example model's $8^3$ mesh overestimates the averaged stresses of the seed by a factor of 1.5 to 1.75. With $\beta = 0.02\ \mathrm{mm}^2/T^*$ the seed mean stress on $8^3$ agrees with $16^3$ within 1 %, and the seed von Mises stress is about 18 % lower. Peaks at the corners of the seed are mesh dependent. On $24^3$ elements the growth $\alpha - 1$ of the seed is 0.7 % above a finite-volume reference solution of the same problem, and the error of the seed stress is estimated at about 2 % from three meshes. With the published parameters the stresses are of order $10^{-4}$ Pa.

- *Data.* The calibration rests on five species under four conditions in vitro and ten patients in vivo. The commensal and dysbiotic consortia used different *P. gingivalis* strains, so part of the difference between the inferred matrices reflects the strains. The symmetric interaction matrix cannot represent directed effects.

### 5.3 Outlook

The work continues at Keio University. The steps follow from the limitations, in order of how well the literature supports them.

1. *More species.* The five-species point model calibrated in Chapter 3 and the bridge from ANSYS to Python already exist; with the scheme of Chapter 4 the field stays a single variable, so only the state of the point model and its parameters need to be widened. With the point model calibrated for CH in the element (Section 4.7.2), the stress does not depend on the composition as long as the field sets the amount of biofilm. When $\alpha$ grows instead with the living biomass $\sum_i \phi_i\psi_i$ of the point model, at a rate chosen (not taken from a paper) so that the mean growth of the seed at $T^* = 1$ equals that of Eq. 36 of Klempt et al. 2024, the mean von Mises stress of the seed is 7 % lower. Growth from the living biomass follows classical multispecies biofilm models, in which only the active biomass grows and inactive cells only occupy volume [67]; it lets lysis or an antibiotic in the point model lower the growth.

2. *The front term $-r\frac{c}{k+c}\,\mathbf{n}_c \cdot \nabla\phi_{3D}$ in the element.* A second-order stabilisation that stays stable on fine meshes would let the element give the converged stress directly; upwind gradients are a first step.

3. *Composition-dependent spreading.* The point model now sees the local nutrient and antibiotic, and its living biomass sets their consumption. Letting the spreading of the field depend on the composition would close the loop further. First computations in Python (Section 4.9.1) show that both change the result: with a local nutrient the composition varies across the seed (now also in ANSYS), and with species-dependent spreading the amount of biofilm at $T^* = 1$ changes by up to 8 %.

4. *Composition into stiffness and stress into growth.* Species-specific stiffness and stress-dependent growth would let the composition reach the stress directly and the stress act back. Both need parameters that are not yet available.

5. *Uncertainty into the stress.* The posterior of Chapter 3 could be carried through the element to the stress; time-separated stochastic mechanics [68] does this at a much lower cost than Monte Carlo sampling.

6. *A test of the inferred network.* The calibrated matrices predict that removing *F. nucleatum* from the dysbiotic flow-reactor consortium reduces the late increase of *P. gingivalis* to about a quarter; a co-culture without it would test this.

# Bibliography


[1] Hawazin W. Elani, Jacqueline R. Starr, John D. Da Silva, and German O. Gallucci. Trends in dental implant use in the U.S., 1999–2016, and projections to 2026. *Journal of Dental Research*, 97(13):1424–1430, 2018. doi: 10.1177/0022034518792567.

[2] Jan Derks and Cristiano Tomasi. Peri-implant health and disease. A systematic review of current epidemiology. *Journal of Clinical Periodontology*, 42(S16): S158–S171, 2015. doi: 10.1111/jcpe.12334.

[3] Patricia Diaz, Esther Gonzalo, Luis J. Gil Villagra, Barbara Miegimolle, and Maria J. Suarez. What is the prevalence of peri-implantitis? A systematic review and meta-analysis. *BMC Oral Health*, 22:449, 2022. doi: 10.1186/s12903-022-02493-8.

[4] Tord Berglundh, Gary Armitage, Mauricio G Araujo, Gustavo Avila-Ortiz, Juan Blanco, Paulo M Camargo, Stephen Chen, David Cochran, Jan Derks, Elena Figuero, and Christoph H F Hammerle. Peri-implant diseases and conditions: Consensus report of workgroup 4 of the 2017 world workshop on the classification of periodontal and peri-implant diseases and conditions. *Journal of Periodontology*, 89:S313–S318, 2018. doi: 10.1002/JPER.17-0739.

[5] Frank Schwarz, Jan Derks, Alberto Monje, and Hom-Lay Wang. Peri-implantitis. *Journal of Clinical Periodontology*, 45:S246–S266, 2018. doi: 10.1111/jcpe.12954.

[6] Lea M Sedghi, Margot Bacino, and Yvonne L Kapila. Periodontal disease: the good, the bad, and the unknown. *Frontiers in Cellular and Infection Microbiology*, 11: 766944, 2021. doi: 10.3389/fcimb.2021.766944.

[7] Jaroslav Mysák, Jan Panda, Jan Plachy, Jitka Reissmanová, Vladimír Sládek, and Jan Klíma. *Porphyromonas gingivalis: Major Periodontopathic Pathogen Overview. Journal of Immunology Research*, 2014:476068, 2014. doi: 10.1155/2014/476068.

[8] George Hajishengallis, Shuang Liang, Mark A Payne, Ahmed Hashim, Ravi Jotwani, Mehmet A Eskan, M. Lamont McIntosh, Ahmed Alsam, Keith L Kirkwood, John D Lambris, Richard P Darveau, and Michael A Curtis. Low-abundance biofilm species orchestrates inflammatory periodontal disease through the commensal microbiota and complement. *Cell Host & Microbe*, 10:497–506, 2011. doi: 10.1016/j.chom.2011.10.006.

[9] Richard J Lamont, Hyun Koo, and George Hajishengallis. The oral microbiota: dynamic communities and host interactions. *Nature Reviews Microbiology*, 16: 745–759, 2018. doi: 10.1038/s41579-018-0089-x.

[10] Paul E Kolenbrander, Robert J Palmer, Saravanan Periasamy, and Nicholas S Jakubovics. Oral multispecies biofilm development and the key role of cell-cell distance. *Nature Reviews Microbiology*, 8(7):471–480, 2010. doi: 10.1038/nrmicro2381.

[11] Floyd E Dewhirst, Tanja Chen, Jacques Izard, Bruce J Paster, Anne C R Tanner, Wen-Han Yu, Abirami Lakshmanan, and William G Wade. The human oral microbiome. *Journal of Bacteriology*, 192:5002–5017, 2010. doi: 10.1128/JB.00542-10.

[12] George Hajishengallis, Richard P Darveau, and Michael A Curtis. The keystone-pathogen hypothesis. *Nature Reviews Microbiology*, 10:717–725, 2012. doi: 10.1038/nrmicro2873.

[13] Philip D Marsh. Are dental diseases examples of ecological catastrophes? *Microbiology*, 149(2):279–294, 2003. doi: 10.1099/mic.0.26082-0.

[14] Alfred J. Lotka. *Elements of Physical Biology*. Williams & Wilkins, Baltimore, 1925. Reprinted 1956 as *Elements of Mathematical Biology*, Dover.

[15] Robert M. May. Will a large complex system be stable? *Nature*, 238(5364):413–414, 1972. doi: 10.1038/238413a0.

[16] Didier Gonze, Katharine Z Coyte, Leo Lahti, and Karoline Faust. Microbial communities as dynamical systems. *Current Opinion in Microbiology*, 44:41–49, 2018. doi: 10.1016/j.mib.2018.07.004.

[17] Richard R Stein, Vanni Bucci, Nora C Toussaint, Charlie G Buffie, Gunnar Rätsch, Eric G Pamer, Chris Sander, and João B Xavier. Ecological modeling from time-series inference: insight into dynamics and stability of intestinal microbiota. *PLOS Computational Biology*, 9:e1003388, 2013. doi: 10.1371/journal.pcbi.1003388.

[18] Ophelia S Venturelli, Alex V Carr, Gavin Fisher, Ryan H Hsu, Rebecca Lau, Benjamin P Bowen, Susan Hromada, Trent Northen, and Adam P Arkin. Deciphering microbial interactions in synthetic human gut microbiome communities. *Molecular Systems Biology*, 14:e8157, 2018. doi: 10.15252/msb.20178157.

[19] Robert Marsland III, Wenping Cui, Joshua Goldford, Alvaro Sanchez, Kirill Korolev, and Pankaj Mehta. Available energy fluxes drive a transition in the diversity, stability, and functional structure of microbial communities. *PLOS Computational Biology*, 15(2):e1006793, 2019. doi: 10.1371/journal.pcbi.1006793.

[20] Hsiao-Tung Cao, Travis E Gibson, Amir Bashan, and Yang-Yu Liu. Inferring human microbial dynamics from temporal metagenomics data: pitfalls and lessons. *BioEssays*, 39:1600188, 2017. doi: 10.1002/bies.201600188.

[21] John Aitchison. *The Statistical Analysis of Compositional Data*. Chapman and Hall, 1986.

[22] Gregory B Gloor, Jean M Macklaim, Vera Pawlowsky-Glahn, and Juan J Egozcue. Microbiome datasets are compositional: and this is not optional. *Frontiers in Microbiology*, 8:2224, 2017. doi: 10.3389/fmicb.2017.02224.

[23] Philipp Junker and Daniel Balzani. An extended Hamilton principle as unifying theory for coupled problems and dissipative microstructure evolution. *Continuum Mechanics and Thermodynamics*, 33(4):1931–1956, 2021. doi: 10.1007/s00161-021-01017-z.

[24] Felix Klempt, Hendrik Geisler, Meisam Soleimani, and Philipp Junker. A continuum multi-species bacterial growth model with a novel interaction scheme. *Archive of Applied Mechanics*, 96:164, 2026. doi: 10.1007/s00419-026-03160-y.

[25] Andrew Gelman, John B Carlin, Hal S Stern, David B Dunson, Aki Vehtari, and Donald B Rubin. *Bayesian Data Analysis*. CRC Press, 3rd edition, 2013.

[26] Jianye Ching and Yi-Chu Chen. Transitional Markov chain Monte Carlo method for Bayesian model updating, model class selection, and model averaging. *Journal of Engineering Mechanics*, 133:816–832, 2007. doi: 10.1061/(ASCE)0733-9399(2007)133:7(816).

[27] Wolfgang Betz, Iason Papaioannou, and Daniel Straub. Transitional Markov chain Monte Carlo: observations and improvements. *Journal of Engineering Mechanics*, 142(5):04016016, 2016. doi: 10.1061/(ASCE)EM.1943-7889.0001066.

[28] James Bradbury, Roy Frostig, Peter Hawkins, Matthew James Johnson, Chris Leary, Dougal Maclaurin, George Necula, Adam Paszke, Jake VanderPlas, Skye Wanderman-Milne, and Qiao Zhang. JAX: composable transformations of Python+NumPy programs, 2018. URL `http://github.com/google/jax`.

[29] Jeffrey D. Orth, Ines Thiele, and Bernhard Ø. Palsson. What is flux balance analysis? *Nature Biotechnology*, 28(3):245–248, 2010. doi: 10.1038/nbt.1614.

[30] Christian Diener, Sean M Gibbons, and Osbaldo Resendis-Antonio. MICOM: metagenome-scale modeling to infer metabolic interactions in the gut microbiota. *mSystems*, 5(1):e00606–19, 2020. doi: 10.1128/mSystems.00606-19.

[31] Almut Heinken, Johannes Hertel, Giriraj Acharya, Dmitry A Ravcheev, Malgorzata Nyga, Onyekachi Emmanuel Okpala, Marina Hogan, Stefania Magnusdóttir, Filippo Martinelli, Monika Bhattacharyya, Alberto Noronha, Kiran R Patil, and Ines Thiele. Genome-scale metabolic reconstruction of 7,302 human microorganisms for

personalized medicine. *Nature Biotechnology*, 41:1320–1331, 2023. doi: 10.1038/s41587-022-01628-0.

[32] Felix Klempt, Meisam Soleimani, Peter Wriggers, and Philipp Junker. A Hamilton principle-based model for diffusion-driven biofilm growth. *Biomechanics and Modeling in Mechanobiology*, 23:2091–2113, 2024. doi: 10.1007/s10237-024-01883-x.

[33] Felix Klempt, Meisam Soleimani, and Philipp Junker. Numerical comparison of biofilm growth models using prominent modeling approaches. *Proceedings in Applied Mathematics and Mechanics (PAMM)*, 22(1):e202200054, 2023. doi: 10.1002/pamm.202200054.

[34] Rumjhum Mukherjee, Felix Klempt, Florian Fuchs, Katharina Doll-Nikutta, Meisam Soleimani, Peter Wriggers, Philipp Junker, Meike Stiesch, and Szymon P. Szafranski. Biofilm development of *Porphyromonas gingivalis* on titanium surfaces in response to 1,4-dihydroxy-2-naphthoic acid — a hybrid in vitro–in silico approach. *Microbiology Spectrum*, 13(10):e00410–25, 2025. doi: 10.1128/spectrum.00410-25.

[35] Meisam Soleimani, Danial Pourbandari, Melody Chemaly, Philipp Junker, Axel Haverich, and Peter Wriggers. Combining inflammation and tissue turnover in the modeling of atherosclerosis development following the outside-in disease approach. *International Journal for Numerical Methods in Biomedical Engineering*, 41(12): e70131, 2025. doi: 10.1002/cnm.70131.

[36] Nils Heine, Kristina Bittroff, Szymon P. Szafrański, Maya Duitscher, Wiebke Behrens, Clarissa Vollmer, Carina Mikolai, Nadine Kommerein, Nicolas Debener, Katharina Frings, Alexander Heisterkamp, Thomas Scheper, Maria L. Torres-Mapa, Janina Bahnemann, Meike Stiesch, and Katharina Doll-Nikutta. Influence of species composition and cultivation condition on peri-implant biofilm dysbiosis in vitro. *Frontiers in Oral Health*, 6:1649419, 2025. doi: 10.3389/froh.2025.1649419.

[37] Philipp Junker, Jerzy Makowski, and Klaus Hackl. The principle of the minimum of the dissipation potential for non-isothermal processes. *Continuum Mechanics and Thermodynamics*, 26(3):259–268, 2014. doi: 10.1007/s00161-013-0299-4.

[38] Klaus Hackl. Generalized standard media and variational principles in classical and finite elastoplasticity. *Journal of the Mechanics and Physics of Solids*, 45(5):667–688, 1997. doi: 10.1016/S0022-5096(96)00110-X.

[39] Philipp Junker, Tobias Bode, and Klaus Hackl. On a holistic variational formulation for material modeling including dissipative evolution. *Journal of the Mechanics and Physics of Solids*, 200:106133, 2025. doi: 10.1016/j.jmps.2025.106133.

[40] Edward K. Rodriguez, Anne Hoger, and Andrew D. McCulloch. Stress-dependent finite growth in soft elastic tissues. *Journal of Biomechanics*, 27(4):455–467, 1994. doi: 10.1016/0021-9290(94)90021-3.

[41] Tobias Bode, Meisam Soleimani, Cem Erdogan, Klaus Hackl, Peter Wriggers, and Philipp Junker. On constraint-conforming numerical discretizations in constitutive material modeling. *Computational Mechanics*, 75(3):1015–1031, 2025. doi: 10.1007/s00466-024-02548-3.

[42] Josef Hofbauer and Karl Sigmund. *Evolutionary Games and Population Dynamics*. Cambridge University Press, 1998. doi: 10.1017/CBO9781139173179.

[43] Peter D. Taylor and Leo B. Jonker. Evolutionarily stable strategies and game dynamics. *Mathematical Biosciences*, 40(1–2):145–156, 1978. doi: 10.1016/0025-5564(78)90077-9.

[44] Siavash Shahshahani. *A New Mathematical Framework for the Study of Linkage and Selection*, volume 17, no. 211 of *Memoirs of the American Mathematical Society*. American Mathematical Society, Providence, RI, 1979.

[45] Nathan E Lewis, Kim K Hixson, Tom M Conrad, Joshua A Lerman, Pep Charusanti, Ashoka D Polpitiya, Joshua N Adkins, Georg Schramm, Samuel O Purvine, Daniel Lopez-Ferrer, Karl K Weitz, Roland Eils, Rainer König, Richard D Smith, and Bernhard Ø Palsson. Omic data from evolved E. coli are consistent with computed optimal growth from genome-scale models. *Molecular Systems Biology*, 6:390, 2010. doi: 10.1038/msb.2010.47.

[46] Stefanie Rath, Stefanie Rottler, Philipp Kump, Sebastian Hilber, Bettina Leber, Angela Horvath, and Vanessa Stadlbauer. Prediction of growth rates with flux balance analysis using semi-curated genome-scale metabolic models is not sufficiently accurate to predict interaction strengths. *BMC Bioinformatics*, 25:50, 2024. doi: 10.1186/s12859-024-05651-7.

[47] Robert Marsland III, Wenping Cui, and Pankaj Mehta. A minimal model for microbial biodiversity can reproduce experimentally observed ecological patterns. *Scientific Reports*, 10:3308, 2020. doi: 10.1038/s41598-020-60130-2.

[48] Rafael Mustri, Miquel Cención, and Sidhartha Goyal. When does the generalized Lotka–Volterra approximation accurately represent microbial consumer-resource dynamics? *PLOS Computational Biology*, 21(12):e1013719, 2025. doi: 10.1371/journal.pcbi.1013719.

[49] Nils Heine, Kristina Bittroff, Szymon P. Szafrański, Maya Duitscher, Wiebke Behrens, Clarissa Vollmer, Carina Mikolai, Nadine Kommerein, Nicolas Debener,

Katharina Frings, Alexander Heisterkamp, Thomas Scheper, Maria L. Torres-Mapa, Janina Bahnemann, Meike Stiesch, and Katharina Doll-Nikutta. Influence of species composition and cultivation condition on peri-implant biofilm dysbiosis in vitro. *Frontiers in Oral Health*, 6:1649419, 2025. doi: 10.3389/froh.2025.1649419.

[50] Keisuke Nishioka, Felix Klempt, Hendrik Geisler, Rumjhum Mukherjee, Nils Heine, Katharina Doll-Nikutta, Meike Stiesch, Szymon P. Szafrański, Meisam Soleimani, and Philipp Junker. Identifiability of species interactions in a living material: Bayesian calibration of an extended Hamilton principle multiphase model. Manuscript in preparation for Extreme Mechanics Letters, 2026.

[51] Pierre Del Moral, Arnaud Doucet, and Ajay Jasra. Sequential Monte Carlo samplers. *Journal of the Royal Statistical Society: Series B*, 68(3):411–436, 2006. doi: 10.1111/j.1467-9868.2006.00553.x.

[52] Cajo J. F. ter Braak. A Markov chain Monte Carlo version of the genetic algorithm Differential Evolution: easy Bayesian computing for real parameter spaces. *Statistics and Computing*, 16(3):239–249, 2006. doi: 10.1007/s11222-006-8769-1.

[53] Sophie Dieckow, Szymon P. Szafrański, Jasmin Grischke, Taoran Qu, Katharina Doll-Nikutta, Matthias Steglich, Ines Yang, Susanne Häussler, and Meike Stiesch. Structure and composition of early biofilms formed on dental implants are complex, diverse, subject-specific and dynamic. *npj Biofilms and Microbiomes*, 10:155, 2024. doi: 10.1038/s41522-024-00624-3.

[54] Isabel F Escapa, Tanja Chen, Yanmei Huang, Prasad Gajare, Floyd E Dewhirst, and Katherine P Lemon. New insights into human nostril microbiome from the expanded Human Oral Microbiome Database (eHOMD): a resource for the microbiome of the human aerodigestive tract. *mSystems*, 3:e00187–18, 2018. doi: 10.1128/mSystems.00187-18.

[55] Szymon P. Szafrański, Keisuke Nishioka, et al. Metabolic interaction network for the peri-implant oral microbiome. In preparation, 2025.

[56] Travis E. Gibson, Younhun Kim, Sawal Acharya, David E. Kaplan, Nicholas DiBenedetto, Richard Lavin, Bonnie Berger, Jessica R. Allegretti, Lynn Bry, and Georg K. Gerber. Learning ecosystem-scale dynamics from microbiome data with MDSINE2. *Nature Microbiology*, 10:2550–2564, 2025. doi: 10.1038/s41564-025-02112-6.

[57] Mischa Blaszczyk, Dustin Roman Jantos, and Philipp Junker. Application of Taylor series combined with the weighted least square method to thermodynamic topology optimization. *Computer Methods in Applied Mechanics and Engineering*, 393:114698, 2022. doi: 10.1016/j.cma.2022.114698.

[58] Tobias Rudolf, Felix Klempt, Hüray Ilayda Kök, Meisam Soleimani, Dustin Roman Jantos, and Philipp Junker. Computational efficiency and accuracy of the Neighbored Element Method. *Finite Elements in Analysis and Design*, 249:104353, 2025. doi: 10.1016/j.finel.2025.104353.

[59] Lukas Fritsch, Hendrik Geisler, Jan Grashorn, Felix Klempt, Meisam Soleimani, Matteo Broggi, Philipp Junker, and Michael Beer. Bayesian updating of constitutive parameters under hybrid uncertainties with a novel surrogate model applied to biofilms. arXiv:2512.15145, 2025.

[60] Ishmail B. Celik, Urmila Ghia, Patrick J. Roache, Christopher J. Freitas, Hugh Coleman, and Peter E. Raad. Procedure for estimation and reporting of uncertainty due to discretization in CFD applications. *Journal of Fluids Engineering*, 130(7): 078001, 2008. doi: 10.1115/1.2960953.

[61] M. Böl, A. E. Ehret, A. Bolea Albero, J. Hellriegel, and R. Krull. Recent advances in mechanical characterisation of biofilm and their significance for material modelling. *Critical Reviews in Biotechnology*, 33(2):145–171, 2013. doi: 10.3109/07388551.2012.679250.

[62] Meisam Soleimani, Nikhil Muthyala, Michele Marino, and Peter Wriggers. A novel stress-induced anisotropic growth model driven by nutrient diffusion: Theory, FEM implementation and applications in bio-mechanical problems. *Journal of the Mechanics and Physics of Solids*, 144:104097, 2020. doi: 10.1016/j.jmps.2020.104097.

[63] Ernest W. Thiele. Relation between catalytic activity and size of particle. *Industrial & Engineering Chemistry*, 31(7):916–920, 1939. doi: 10.1021/ie50355a027.

[64] Dianlei Feng, Insa Neuweiler, Regina Nogueira, and Udo Nackenhorst. Modeling of symbiotic bacterial biofilm growth with an example of the Streptococcus–Veillonella sp. system. *Bulletin of Mathematical Biology*, 83:48, 2021. doi: 10.1007/s11538-021-00888-2.

[65] Meisam Soleimani, Szymon P. Szafranski, Taoran Qu, Rumjhum Mukherjee, Meike Stiesch, Peter Wriggers, and Philipp Junker. Numerical and experimental investigation of multi-species bacterial co-aggregation. *Scientific Reports*, 13:11839, 2023. doi: 10.1038/s41598-023-38806-2.

[66] Jacob Pattem, Mehmet Davrandi, Sebastian Aguayo, Elaine Allan, David Spratt, and Laurent Bozec. A multi-scale biophysical approach to develop structure-property relationships in oral biofilms. *Scientific Reports*, 8:5691, 2018. doi: 10.1038/s41598-018-23798-1.

[67] Oskar Wanner and Willi Gujer. A multispecies biofilm model. *Biotechnology and Bioengineering*, 28(3):314–328, 1986. doi: 10.1002/bit.260280304.

[68] Hendrik Geisler, Cem Erdogan, Jan Nagel, and Philipp Junker. A new paradigm for the efficient inclusion of stochasticity in engineering simulations: Time-separated stochastic mechanics. *Computational Mechanics*, 75(1):211–235, 2025. doi: 10.1007/s00466-024-02500-5.

# A AGORA2 Representative Strains and Oral-Fluid Medium

Table A.1 lists the AGORA2 v2.01 genome-scale model chosen as the representative for each guild in the pFBA and MICOM community-FBA layers of the metabolic sign prior of Section 3.6. The *Other* guild has no representative, so guild pairs involving it receive no FBA-based prior.

| Guild | AGORA2 representative strain |
|---|---|
| Actinobacteria | *Actinomyces naeslundii* Howell 279 |
| Bacilli | *Streptococcus gordonii* CH1 |
| Negativicutes | *Veillonella parvula* Te3 DSM 2008 |
| Bacteroidia | *Prevotella melaninogenica* ATCC 25845 |
| Fusobacteriia | *Fusobacterium nucleatum* ATCC 25586 |
| Clostridia | *Parvimonas micra* ATCC 33270 |
| Coriobacteriia | *Atopobium parvulum* DSM 20469 |
| Gammaproteobacteria | *Haemophilus parainfluenzae* T3T1 |
| Betaproteobacteria | *Eikenella corrodens* ATCC 23834 |
| Other | no AGORA2 representative (no pFBA or MICOM prior) |

Table A.1: AGORA2 representative strains per guild used for the pFBA and MICOM community-FBA layers.

**Oral-fluid medium.** The shared medium was assembled in two steps. First, quantified metabolite concentrations in unstimulated whole saliva were drawn from the literature and converted to exchange bounds (mmol $\mathrm{gDW^{-1}\,h^{-1}}$) assuming a biofilm density of $\sim$2 $\mathrm{gDW\,L^{-1}}$ and a reference growth rate of 0.1 $\mathrm{h^{-1}}$: sugars (glucose, fructose, sucrose) and lactate, all twenty amino acids plus ornithine, B-vitamins, trace metals, purines, and inorganic salts. Concentrations were set at the blood-plasma scale ($\sim$100$\times$ realistic saliva) so that every model remains feasible; a realistic-concentration variant produced non-specific competition (growth suppressed by more than 50% in most pairs) and was not used. Second, AGORA2-specific cofactors absent from the saliva list were added at minimal bounds where required for feasibility (protoheme/siroheme, menaquinones, *meso*-diaminopimelate, long-chain fatty acids, 4-hydroxybenzoate, adenosylcobalamin, glutathione, polyamines, cytidine). The $O_2$ exchange of the strictly anaerobic guilds was shut off before optimisation.

# B TMCMC Implementation Details

The four-stage GPU-accelerated TMCMC procedure of Chapter 3 (Sections 3.2.3 and 3.2.4) is summarised in Algorithm 2. The GPU speed-up (170× per tempering step and 147× end to end on the matched benchmark) and the wall-clock times are in Table 3.2; the fit errors and log-likelihoods are in Table 3.3.

**Algorithm 2** Four-stage GPU-accelerated TMCMC

**Require:** Data $\mathbf{y}_{\text{obs}}$ (viable and total composition, live fraction), $N_p$ particles, prior box $B$, GPU device
**Ensure:** MAP $\hat{\boldsymbol{\theta}}$ and posterior samples of every stage
▷ **One TMCMC run on a box $B$ with likelihood $p(\mathbf{y}_{\text{obs}} \mid \boldsymbol{\theta})$**
draw $\{\boldsymbol{\theta}_j\}$ in $B$; $\beta_0 \leftarrow 0$
**while** $\beta_m < 1$ **do**
  find $\beta_{m+1}$ such that the coefficient of variation of the weights equals its target, by bisection
  weights $w_j \leftarrow p(\mathbf{y}_{\text{obs}} \mid \boldsymbol{\theta}_j)^{\beta_{m+1}-\beta_m}$; resample $\propto w_j$
  estimate the weighted covariance $\hat{\boldsymbol{\Sigma}}^{(m)}$
  **for** $k = 1$ **to** $n_{\text{mut}}$ **do**
    propose a random-walk step scaled by $\hat{\boldsymbol{\Sigma}}^{(m)}$ or a differential-evolution step, alternately
    reject proposals outside $B$ without solving the model
    evaluate all $N_p$ likelihoods at once via `jax.vmap` on the GPU; accept or reject (Metropolis–Hastings)
  **end for**
**end while**
▷ **Stage (i):** composition terms only, $\psi_i$ fixed to the data, full box
▷ **Stage (ii):** as (i), box narrowed to the stage-(i) posterior mean ±4 standard deviations
▷ **Stage (iii):** full likelihood, $\psi_i$ evolved, full (widened) box; half of the particles around the stage-(ii) MAP, half from the prior
▷ **Stage (iv):** as (iii), box narrowed to the stage-(iii) posterior mean ±4 standard deviations
if more than 20 % of the posterior mass of an entry lies in the outer 5 % of the box on one side, move that bound outwards and repeat the stage
run every stage with three seeds; accept it only if criteria (a)–(e) of Section 3.2.4 hold, otherwise repeat it with more particles or mutation steps
**return** $\hat{\boldsymbol{\theta}}$, posterior samples

**Settings.** Table B.1 lists the particles and mutation steps of every stage; the gauge is $c^* = 25$.

The acceptance criteria, the definition of an identified entry and the treatment of entries with several posterior modes are given in Section 3.2.4.

| Stage | CS | CH | DS | DH |
|---|---|---|---|---|
| (i) | $1{,}000 \times 40$ | $1{,}000 \times 40$ | $1{,}000 \times 40$ | $1{,}000 \times 40$ |
| (ii) | $2{,}000 \times 120$ | $2{,}000 \times 150$ | $3{,}000 \times 100$ | $2{,}000 \times 80$ |
| (iii) | $2{,}000 \times 160$ | $2{,}000 \times 150$ | $18{,}000 \times 150$ | $\mathbf{20{,}000 \times 120}$ |
| (iv) | $\mathbf{5{,}000 \times 150}$ | $\mathbf{5{,}000 \times 150}$ | $\mathbf{18{,}000 \times 150}$ | $20{,}000 \times 150$ |

Table B.1: Particles $N_p$ times mutation steps $n_{\text{mut}}$ per seed. Bold: the final stage of each condition; DH stage (iv) did not meet criterion (e) and is not used.

# C Reproduction of the Test Cases of Klempt et al. 2024

Before coupling the field model of Klempt et al. [32] into the finite element framework, I solved its two test cases independently in Python, to see whether the equations and parameters as printed give the published results. They do not in every respect, and this appendix records what is needed to reproduce them. None of the results of Chapter 4 depends on this reproduction; it informs the background of Section 2.2 and the questions to the authors.

## C.1 Set-up

The domain is the paper's cube of 20 $\mu$m edge length on a regular grid of $21^3$ nodes. Equations (2.5)–(2.7) are integrated with explicit time steps and upwinded gradients in the front term; $\phi$ is limited to $[0, 1]$. All parameters are those of Table 2.1. The two test cases are:

- *4.1*: a spherical seed of 5 $\mu$m radius in the centre, the nutrient held at $c = 1$ in one corner of the cube. Read from the paper's Fig. 3 and Table 3, the source is a block of about 2 $\mu$m at the corner; the strip of the schematic Fig. 2 fits worse.
- *4.2*: a disk of 5 $\mu$m diameter just above a bottom face held at $c = 1$, with the consumption $g = 10^8$ ("high" nutrient level) and $g = 10^{10}$ ("low").

The published curves of the mean $\phi$ and mean $c$ (Figs. 4 and 7) were read off the PDF by colour and compared with the reproduction by their RMS difference over $T^* \in [0, 1]$.

## C.2 The printed equations

Solved as printed, the front term of Eq. (2.5) moves the seed towards the nutrient rather than enlarging it: the factor $\mathbf{n}_{\nabla\phi} \cdot \mathbf{n}_{\nabla c}$ is positive on the face of the colony that looks towards the nutrient and negative on the other, so one face grows while the other recedes. The mean $\phi$ of Fig. 4 is not reached with any numerical variant tried (seed held fixed, no limiter, a second-order upwind scheme), nor with any time scale. Two further observations point the same way: in case 4.2 "high" the front advances at about 150 $\mu$m per $T^*$, three times the largest speed $r\,c/(k + c)$ that Table 2 allows, and in Table 4 of the paper the biofilm grows away from the nutrient face, while the printed term drives it towards it.

The consumption term gives a clean check. With the consumption $g\,\phi\,c$, proportional to the nutrient, the steady nutrient level of case 4.2 "high" is $\tanh(2)/2 = 0.482$, against 0.489 in the paper. The printed form $g\,\phi$ gives 0.139.

## C.3 What reproduces the curves

The following changes, each stated as an assumption, reproduce all three curves without changing a value of Table 2:

1. growth on every face of the colony, with the front term $\|\nabla_X \phi\| \, \frac{r\,c}{k+c}\big[w + (1-w)\,|\mathbf{n}_{\nabla\phi} \cdot \mathbf{n}_{\nabla c}|\big]$ and an isotropic share $w = 0.5$ (the text of the paper says that growth perpendicular to the nutrient gradient is smaller, not zero);
2. consumption $g\,\phi\,c$;
3. a time scale $s_T$ per simulation, applied to $r$, $\beta$ and $k_\alpha$: the paper normalises time by a reference time "chosen based on the conditions for growth at hand", which is not given.

Table C.1 lists the resulting differences. For $w$ between 0.35 and 0.7 the worst of the three stays between 0.029 and 0.032, so the curves do not determine $w$ precisely.

Table C.1: RMS difference between the reproduction and the curves of Klempt et al. 2024 (mean $\phi$ and mean $c$, averaged), with the changes listed in the text.

| test case | time scale $s_T$ | RMS, $w = 0.5$ | RMS, $w = 0$ |
|---|---|---|---|
| 4.1 (Fig. 4) | 1 | 0.013 | 0.022 |
| 4.2 high (Fig. 7) | 5 | 0.021 | 0.038 |
| 4.2 low (Fig. 7) | 3 | 0.030 | 0.070 |

The shapes agree in kind (Figures C.1 and C.2). In case 4.1 the colony becomes an egg drawn out towards the nutrient corner and reaches it, as in the paper. In case 4.2 the early dome and the final layer of the "low" case look like the paper's; in the "high" case the reproduction spreads to the side walls earlier, where the paper's colony rises with straight sides. In the variant without the isotropic share ($w = 0$), varying the regularisation $\beta$ and the upwind scheme did not change the shapes, so the remaining differences lie in the equations or the set-up rather than in the numerics.

### C.4 Mechanics and units

The reproduction has no mechanics. Two bounds show that the published curves can nevertheless be compared with it. The material is incompressible, so the current volume is $\alpha^3$ times the reference volume; with $\alpha - 1 \leq 0.01$ at $T^* = 1$ the volume-weighted means of $\phi$ and $c$ differ from the plain ones by at most 0.001. The mechanical term of the $\phi$ equation, which the paper drops, would be of order $10^4$ to $10^6$ per $T^*$ after division by the viscosity $\eta_\phi = 10^{-10}$ (the paper gives no unit), against a growth term of about 500 per $T^*$; kept, it would stop the growth that every figure shows.

The pressure plotted in Table 3 of the paper (of order $10^{-4}$ MPa) is consistent with $\mu = 3.3557$ MPa, as stated in the text, and not with the 3.3557 Pa of Table 2, which would give pressures a million times smaller. This is an inference from the plot. The calculations of Chapter 4 use $E = 10$ Pa as in Table 2; their stresses scale linearly with $E$.

### C.5 Questions to the authors and their answers

I sent these questions to the first author on 3 and 5 October 2026 and received his answers on 5 October. They settle some points and leave others open:

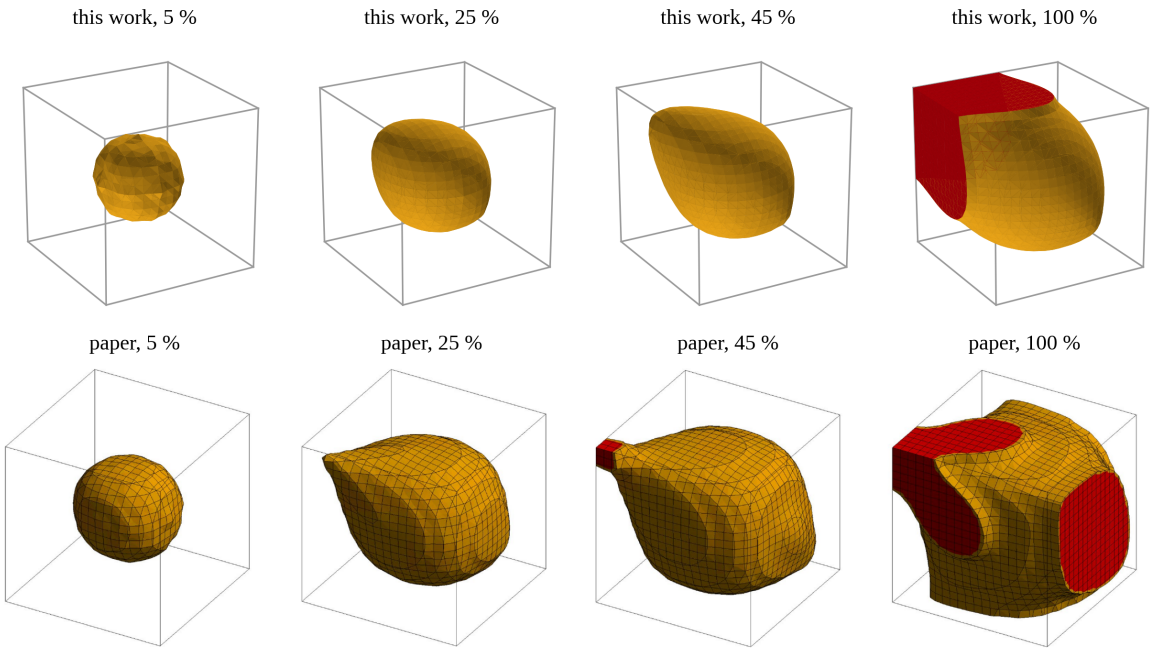



Figure C.1: Test case 4.1: isosurface $\phi = 0.8$ at 5, 25, 45 and 100 % of the simulated time. Top: reproduction with the changes listed in the text ($w = 0.5$, $s_T = 1$). Bottom: Fig. 3 of Klempt et al. 2024 (CC BY 4.0).

- *Front term.* His implementation uses Eq. (2.5) as printed: where the nutrient gradient behind the colony points towards it, the colony does not grow on that side. The isotropic share $w$ of the reproduction is therefore my change, needed to reach the published curves with the explicit scheme used here. Whether the finite element solution of the paper reaches them without it is open.

- *Direction where the nutrient is uniform.* The implementation uses $\nabla_X c/(\|\nabla_X c\| + \varepsilon)$ with a small $\varepsilon$, of order $10^{-8}$ to $10^{-12}$ (F. Klempt, personal communication, October 2026).

- *Consumption.* He recalled $g\,\phi$, as printed, but was not certain. The steady nutrient level of case 4.2 “high” (0.489 in the paper) follows from $g\,\phi\,c$ and not from $g\,\phi$ (0.482 against 0.139, see above). Dr. Soleimani, who computed the published examples, confirmed on 6 October 2026 that $g\,\phi\,c$ is correct. The consumption term of Eq. 35 is therefore $g\,\phi\,c$, as in the reproduction.

- *Time.* Every simulation ran over a time of 1 ($T^* = 1$). The time scales $s_T = 5$ and 3 that the reproduction needs for case 4.2 are therefore not explained by different reference times.

- *Nutrient in case 4.1.* Only the corner, as assumed here.

- *Diffusion coefficient $\beta$.* Chosen to give sensible results; it depends on the mesh. The value used in Chapter 4, Table 2 converted to the 2 mm cube, is therefore an

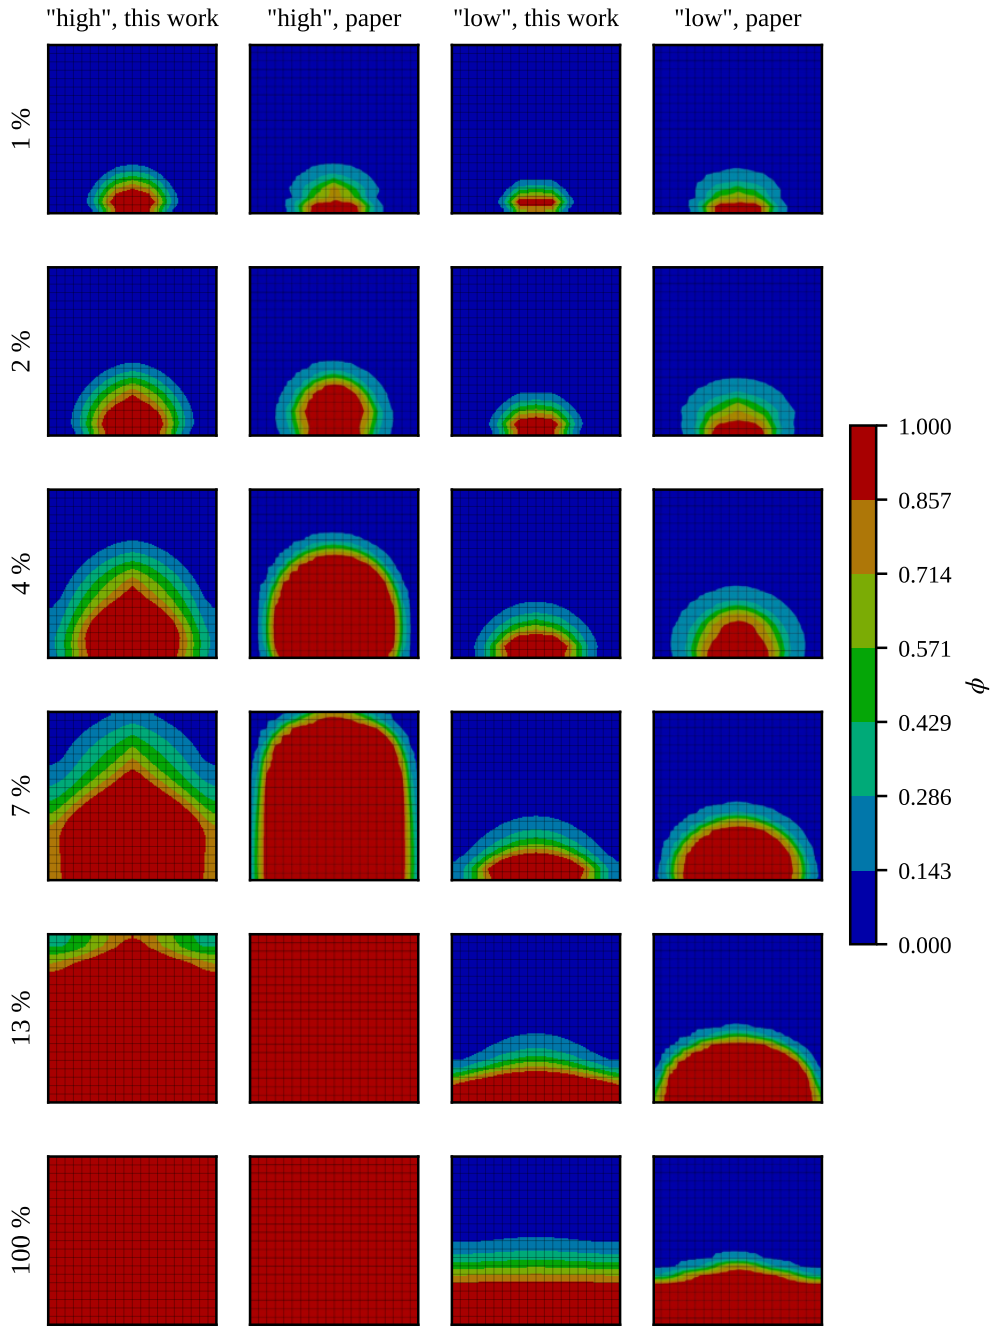



Figure C.2: Test case 4.2: vertical mid-plane, nutrient face at the bottom, reproduction next to Table 4 of Klempt et al. 2024 (CC BY 4.0), in the paper's colour bands. Reproduction with the changes listed in the text: $w = 0.5$, consumption $g\,\phi\,c$, time scales $s_T = 5$ ("high") and 3 ("low"), as in Table C.1.

assumption.

- *Stiffness.* The unit in the paper may be wrong; he suggests $E = 10$ kPa ($\mu \approx 3.3$ kPa). This differs from the inference from the plot of Table 3 above ($\mu = 3.3557$ MPa). The stresses of Chapter 4 scale linearly with $E$, so either value rescales them without changing any comparison.

Whether $\alpha$ follows Eq. 36 or the update of Table 1 (Section 2.2) remains to be asked. The first author has offered his implementation; comparing it with the reproduction is part of the continuation of this work. His implementation is ongoing work, part of a dissertation in preparation, and is not reproduced here.

# D Stability of the Explicit Field Update

The element advances its field explicitly, $\phi_{n+1} = \phi_n + \Delta t\,(\beta L\phi_n + \ldots)$, where $L$ is the Neighbored Element Method approximation of the Laplacian [57, 58]: at every Gauss point a second-order Taylor polynomial is fitted by weighted least squares through the values at the $N$ nearest Gauss points, with the weight $w = \exp[-\frac{1}{2}(4d/\beta^*)^2]$ of the distance $d$, and the Laplacian is the sum of the three unmixed second derivatives of the fit. In the runs of Chapter 4 the element uses $N = 30$ and $\beta^* = 0.2$ mm. For explicit Euler the update is stable if $\beta\Delta t\,\rho \leq 2$, with $\rho$ the spectral radius of $-L$; written with $\lambda = \beta\Delta t/h^2$ this is $\lambda \leq \lambda_{\max} = 2/(\rho h^2)$. For the three-point stencil in one dimension $\rho = 4/h^2$ and $\lambda_{\max} = 1/2$, which is the condition $h^2/(2\Delta t) \geq \beta$ of Rudolf et al. [58]; for the five-point stencil in two dimensions $\lambda_{\max} = 1/4$ and for the seven-point stencil in three dimensions $1/6$.

**Lattice of the Gauss points.** On a uniform hexahedral mesh of size $h$ the $2 \times 2 \times 2$ Gauss points of SOLID185 lie, per axis, at $h(\frac{1}{2} \pm \frac{1}{2\sqrt{3}})$ inside each element, so their spacing alternates between $h/\sqrt{3} \approx 0.58h$ inside an element and $h(1 - 1/\sqrt{3}) \approx 0.42h$ across the element boundary. The eight points of an element are equivalent under the reflections of the cube, so the stencil of one of them gives the other seven by mirroring, and the operator $L$ is periodic with the period $h$ of the mesh with eight points per cell.

**Spectral radius.** I computed the stencil of the WLS fit on this lattice with the deck values and formed the $8 \times 8$ Bloch symbol $\hat{L}(\mathbf{k})$ of $L$ over the Brillouin zone of the cell lattice; $\rho$ is the largest modulus of its eigenvalues over $\mathbf{k}$. Three points follow from the result (Table D.1).

First, the limit of the NEM stencil differs from $1/6$ even without the weighting: with $\beta^* \to \infty$ it is 0.18 to 0.19, because the lattice is not uniform and the stencil reaches beyond the nearest neighbours.

Second, the weighting makes the limit depend on the mesh. Because $\beta^*$ is a length in millimetres, the weight of a neighbour at distance $d$ depends on $d/\beta^*$, and on a coarse mesh the fit is dominated by the few nearest points, which gives a stencil with large coefficients and a small $\lambda_{\max}$: 0.062 on $8^3$ elements, 0.139 on $16^3$ and 0.162 on $24^3$ for one choice of 30 neighbours, 0.149 and 0.173 for the symmetric set of 32.

Third, the choice of the neighbours matters. The 30th neighbour lies in a shell of seven points at the distance $h$, of which the fit takes five; which five follows from the sort order inside the element and cannot be read off the deck. Over 40 random choices of the five, the limit stays at 0.062 on $8^3$, where the weight of that shell is negligible, but lies between 0.122 and 0.140 on $16^3$ and between 0.122 and 0.162 on $24^3$ (shaded in Figure D.1). On the finite cube, with the neighbours taken in the order of a $k$-d tree, the limit is 0.143

on both meshes. The limit approaches the unweighted value as the mesh is refined. A direct time stepping of the stencil on a periodic block of elements grows by the factor $|1 - 2\lambda/\lambda_{\max}|$ per step, as the analysis predicts.

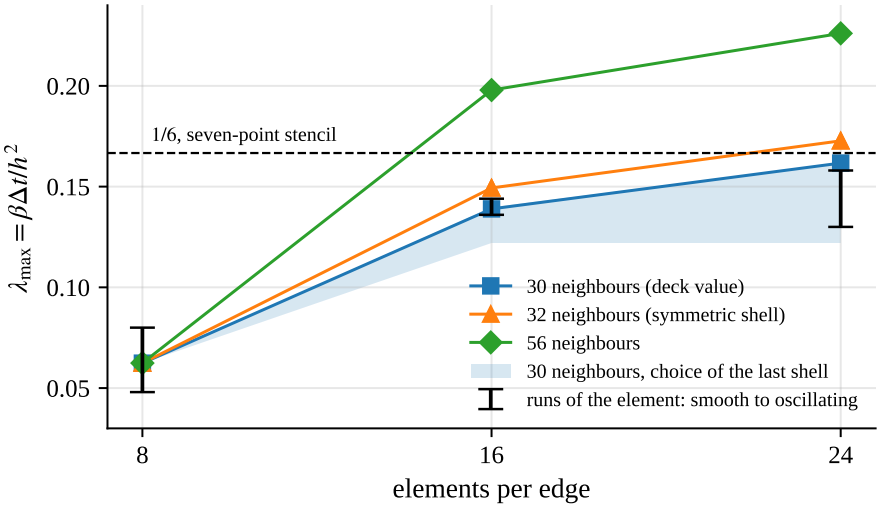



Figure D.1: Stability limit of the explicit field update from the Bloch analysis, against the number of elements per edge, for 30, 32 and 56 neighbours with $\beta^* = 0.2$ mm; shaded: the range over the choice of five of the seven equidistant points of the last shell for 30 neighbours; bars: the runs of the element to $T^* = 5$, from the largest smooth to the smallest stopped $\lambda$.

**Comparison with the runs.** Runs to $T^* = 5$ bracket the limit at $0.048 < \lambda_{\max} < 0.080$ on $8^3$ and $0.136 < \lambda_{\max} < 0.144$ on $16^3$, and $0.130 < \lambda_{\max} < 0.158$ on $24^3$; all three agree with the computed values, on $16^3$ and $24^3$ within the band of the neighbour choice. The unstable mode is the alternation of sign between neighbouring points, which is what the failing runs show in $\alpha - 1$.

With 32 neighbours set in the deck, the run on $16^3$ stays smooth to $T^* = 5$ at $\lambda = 0.144$ and stops at 0.155, around the computed 0.149. On $24^3$ the runs at 0.164 and 0.180 both stay smooth to $T^* = 5$, so the limit there lies at or above 0.180, at most 4 % above the computed 0.173 and clearly above the 0.158 at which the run with 30 neighbours stops. The accuracy does not change with the number of neighbours: at $\Delta t = 0.0125$ the error of the seed mean against the finite-volume reference (Figure 4.11) is +1.58 % with 32 and +1.47 % with 30 neighbours on $16^3$, and +0.98 % and +0.83 % on $24^3$. The results of this work use the deck value 30.

On $8^3$ the runs at $\beta = 0.1$ mm$^2/T^*$ to $T^* = 1.1$ stay smooth up to $\lambda = 0.088$ and stop at 0.096, above the computed limit of 0.062. The spectral radius of the operator on the finite $8^3$ cube, where each point fits its stencil over the 30 nearest points that exist, gives the same limit, 0.063, so the boundary does not explain the difference. The initial field does: $\phi$ is constant in each element, and its component along the unstable mode is $8 \times 10^{-7}$ of its norm. A run to $T^* = 1.1$ takes only 18 to 22 steps on $8^3$, and the growth

factor per step, $|1 - 2\lambda/\lambda_{\max}|$, is 1.5 to 2.1 between $\lambda = 0.08$ and 0.096, so the mode reaches the size of $\phi$ only near the end of the run. Marching the same seed problem with the finite-cube operator reproduces this. I therefore predicted that longer runs show the limit, and two runs to $T^* = 5$ confirm it: at $\lambda = 0.080$ the elements collapse at $T^* = 1.65$, at $\lambda = 0.048$ the run stays smooth to the end. The limit on $8^3$ lies between 0.048 and 0.080, in agreement with 0.062. A run judged stable must therefore be long enough for the unstable mode to grow. The same holds on $24^3$, where the run at $\lambda = 0.158$ is smooth to $T^* = 1.1$ and stops before $T^* = 5$; marching the seed problem with the finite-cube operator gives the same picture, with $\alpha - 1$ turning negative at $T^* = 1.04$ for $\lambda = 0.158$ and at $T^* = 1.56$ for 0.150.

Table D.1: Stability limit $\lambda_{\max} = \beta\Delta t/h^2$ of the explicit update with the NEM stencil on the lattice of the Gauss points, from the Bloch analysis; $\beta^* = 0.2$ mm as in the element, and the unweighted limit; second row: the range over the choice of the neighbours in the last shell. Last row: the largest smooth and the smallest stopped $\lambda$ of the runs to $T^* = 5$.

| | $8^3$ | $16^3$ | $24^3$ | $\beta^* \to \infty$ |
|---|---|---|---|---|
| $N = 30$, one choice | 0.062 | 0.139 | 0.162 | 0.185 |
| $N = 30$, range over the choice | 0.062 | 0.122–0.140 | 0.122–0.162 | |
| $N = 32$ neighbours | 0.062 | 0.149 | 0.173 | 0.180 |
| runs to $T^* = 5$: smooth / stopped | 0.048 / 0.080 | 0.136 / 0.144 | 0.130 / 0.158 | |
| runs to $T^* = 5$, $N = 32$ | | 0.144 / 0.155 | 0.180 / – | |

## Selbstständigkeitserklärung

Hiermit versichere ich, dass ich die vorliegende Masterarbeit selbstständig verfasst und keine anderen als die angegebenen Quellen und Hilfsmittel benutzt habe. Dies schließt die Verwendung von elektronischen Medien sowie text- oder anderen inhaltsgenerierenden IT-Werkzeugen wie ChatGPT ein. Alle Stellen der Arbeit, die wörtlich oder sinngemäß aus anderen Quellen übernommen wurden, sind als solche kenntlich gemacht. Die Arbeit hat in gleicher oder ähnlicher Form noch keiner Prüfungsbehörde vorgelegen.

**Use of AI tools.** I used an AI assistant (Claude, Anthropic) for programming support and for drafting and language editing of parts of the text. All results, the choice of methods and the interpretation are my own; I checked every passage and take full responsibility for the content.

Hannover, _____ Unterschrift: _____